


Step 1 -- Freeze (necessity test)

conv stem scan (Δ, B, C) SiLU gate proj


BM3-frozen

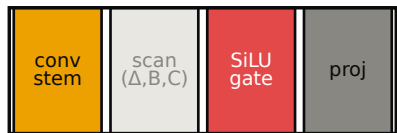

$\Delta(\text{BM3} - \text{frozen}) \leq 5\text{pp}$;
frozen $\gg$ S4D (+14-18pp)
→ selectivity REJECTED

Step 2 -- Remove (localise)


frozen – gate

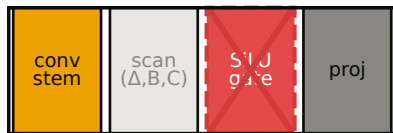

gate removal: -13 to -24pp,
falls below S4D
→ gate = PRIMARY DRIVER

Step 3 -- Graft (sufficiency test)

S4D + gate
+ added

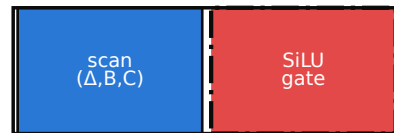

recovery ratio $R = 0.174$
(< 0.3 floor)
→ NOT TRANSPLANTABLE

Deep-noise robustness is a component-interaction effect of the block composition, not of any single mechanism.