

NANO 112 Term Presentation - Thermally Insulative CNT Windows

*Andrew King
Alec Vogelsang
Jeff Whitridge
Asad Yazdani*

Motivation

Can't see inside my refrigerator
without opening it and letting
heat in

To bring the fridge to regulated
temperature, it'll have to use a lot
of energy to cool it back down.



Idea

THERMALLY INSULATIVE CNT WINDOWS

Aerogel (highly insulating) or silica (glass) substrate window, patterned with rows of CNTs.

As long as they're spaced out larger than the wavelength of light, we should be able to see through it

Red has a wavelength of approx. 700 nm, so we space them at least 710 nm apart.

Multiple light sources inside the fridge




Idea


Incident heat that interacts with the CNT array is directed to the edges of window.

Thermal Conductivity

$$k_{ax} = 3500 \text{ W/m}\cdot\text{K}$$

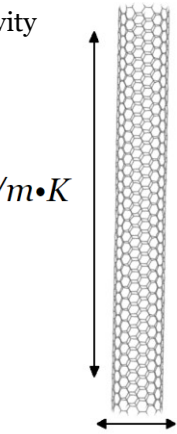

$$k_{rad} = 1.52 \text{ W/m}\cdot\text{K}$$

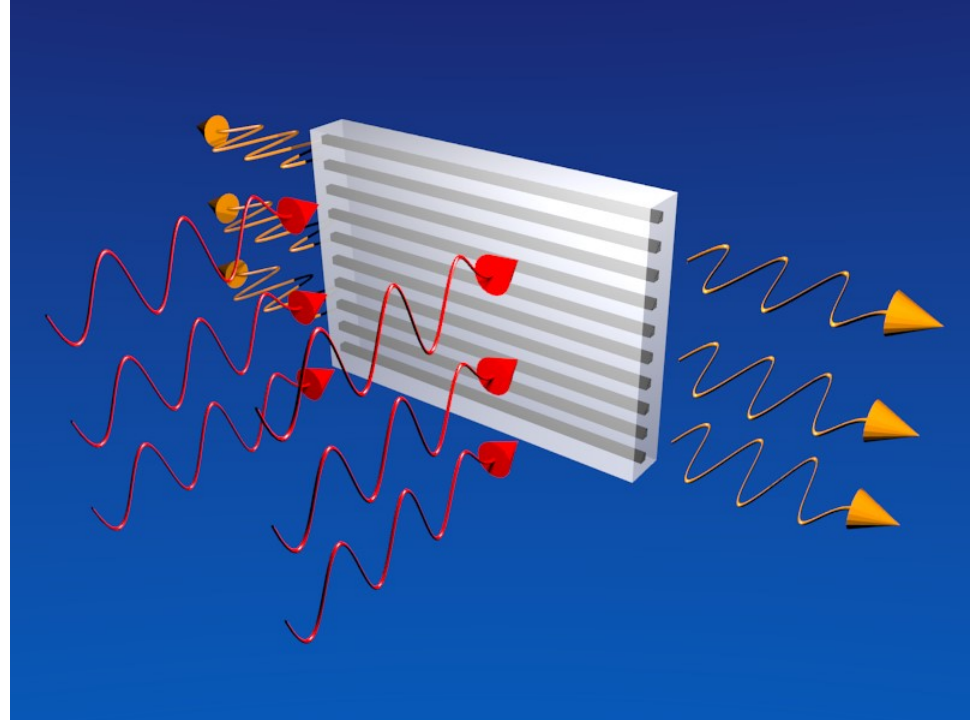


Design

Low transmission of heat through the fridge door

Instead, the heat is conducted in plane with the door

Transmitted into copper heatsinks that border the window

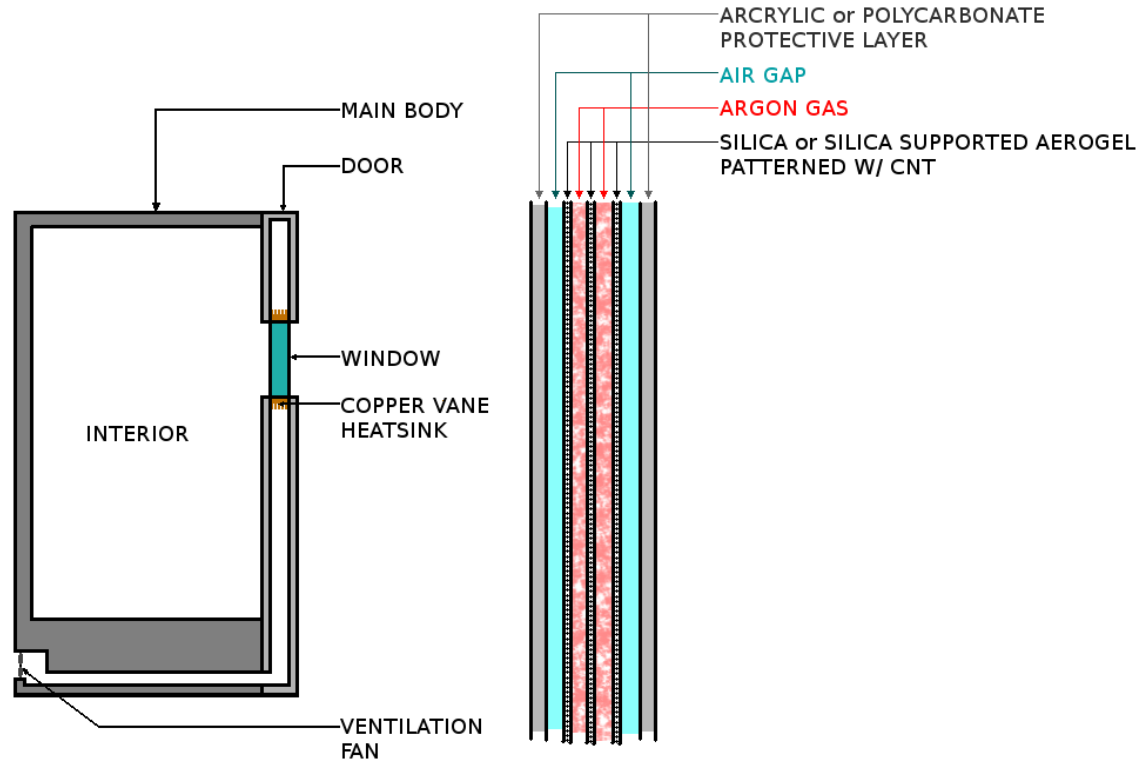

Manufacturing

Requirements

- High throughput

- Decent resolution (~ 700 nm)

 - Thinner trenches will need higher resolution

- Autonomous manufacturing for production

- Good alignment

 - Piezoelectric materials

Manufacturing

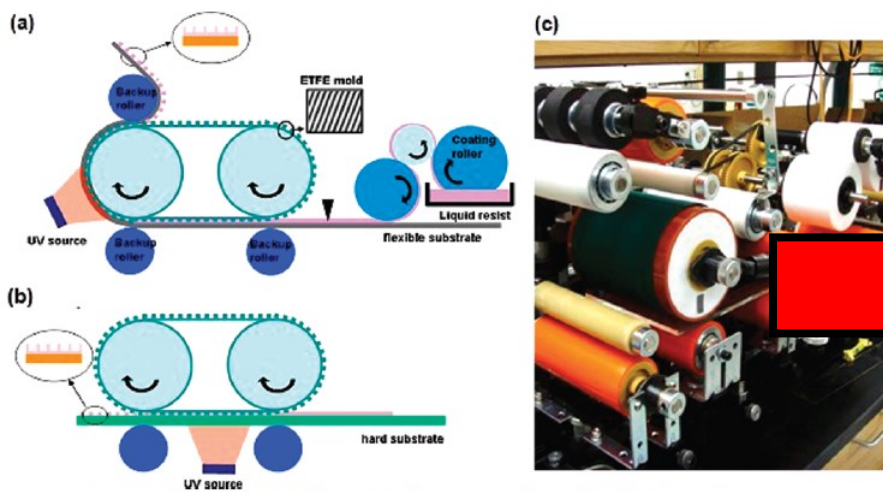


Figure 1. Schematics of (a) R2RNIL and (b) R2PNIL process. (c) Photograph of 6 in.-capable R2R/R2PNIL apparatus.

Ahn and Guo, ACS Nano 3(8):2304-2310, 2009.


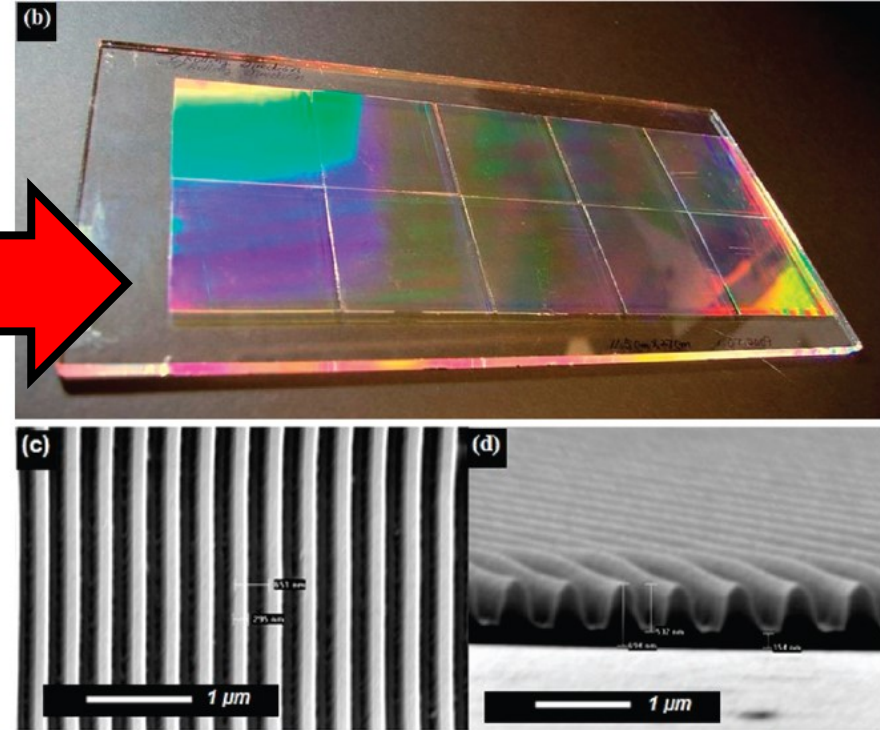


Figure 2. (a) A 4 in. wide, 12 in. long 700 nm period epoxysilicone pattern on flexible PET substrate by R2RNIL process and (b) a 4 in. wide, 10.5 in. long 700 nm period grating pattern on glass substrate. (c,d) SEM images of the patterned grating structure.


Ahn and Guo, ACS Nano 3(8):2304-2310, 2009.

Manufacturing


a.

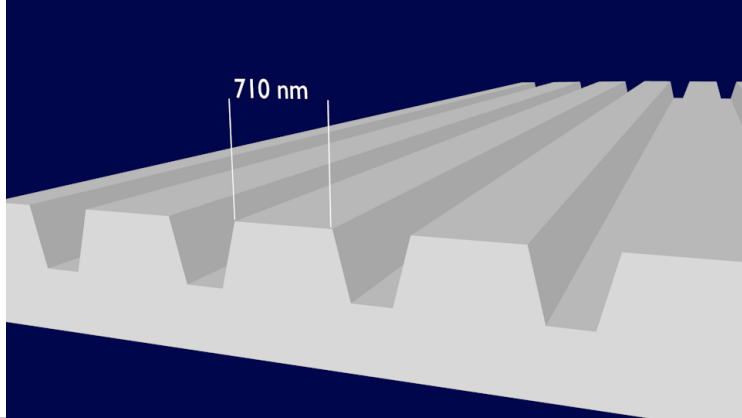


b.

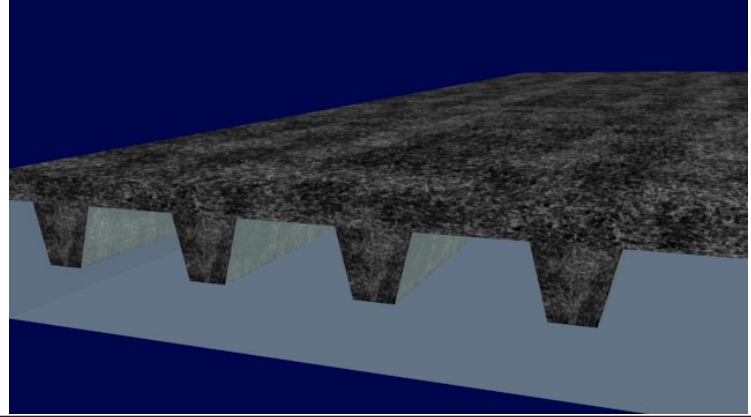

c.

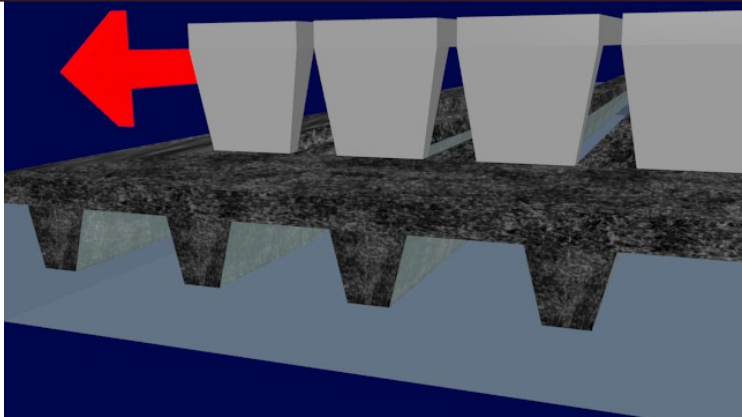

d.

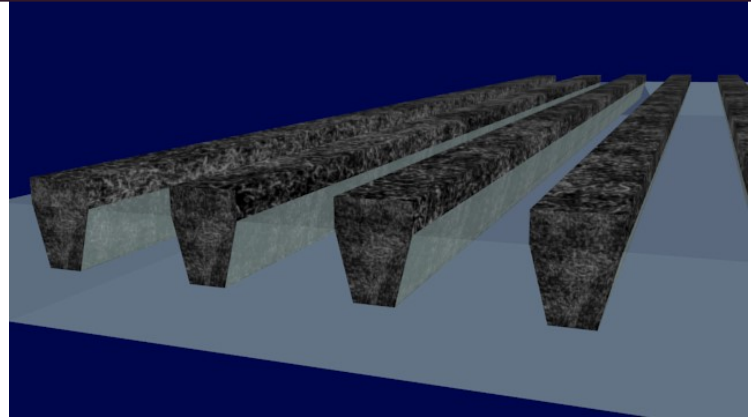

Preliminary Calculations

Fourier's Law in 1-D: $q = kAdT/s$ [W]

q = heat transfer

k = thermal conductivity of the material

A = area

dT = temperature gradient

s = thickness of material

For glass: $k = 1.05$ W/m•K

For CNT (axial direction): $k_{ax} = 3500$ W/m•K

For CNT (radial direction): $k_{rad} = 1.52$ W/m•K

Comparable to glass

Results (Costs)

Volume Estimate: $15.24\text{ cm} \times 20.32\text{ cm} \times 0.5\text{ cm} \rightarrow 154.838\text{ cm}^3$

Cost of Glass substrate:

~\$61.47 for tempered glass with these dimensions

[DullesGlassandMirror](#)

Cost of Aerogel:

\$60 for a single $2.5\text{ cm} \times 2.5\text{ cm} \times 1.0\text{ cm}$ block

[BuyAerogel](#)

→ \$1486.44 worth of aerogel

Very expensive compared to glass

Results (Costs)

- Carbon Nanotube Costs
 - \$10/g
 - Density = $1.6 \text{ g}\cdot\text{cm}^{-3}$
 - Estimated Volume of CNTs
 - $710 \text{ nm} \times 710 \text{ nm} \times 20.32 \cdot 10^7 \text{ nm} \cdot 107,500 \text{ trenches}$
 $= 0.11 \text{ cm}^3$
 - Finding Mass using $p = M/V$
 - Total mass = 0.0175 g
 - \rightarrow $\$0.175 \text{ per window}$

Conclusions

Possible issues

- Need to find a reliable method of aligning CNTs

- Too much heat transmission through tubes

 - Alternatively use graphene sheet instead

- Unwanted light diffraction

 - Spacing with the trenches

 - Multiple internal light sources

Other potential uses

- Anything that requires insulation and visibility

 - Painting/art storage

 - Housing in cold climates