

# Atmosphere Plus

*Jeff Boody | jeffboody@3dgesoftware.com*

## About

These notes describe the atmospheric rendering theory and implementation for the Atmosphere Plus demo.

## 1 Background

### 1.1 Wavelength of Light

The wavelength of light is a continuous value, however, we will select 3 discrete wavelengths to represent red, green and blue light.

The typical range of wavelengths include:

- $\lambda_r = (620, 750)$  nm
- $\lambda_g = (495, 570)$  nm
- $\lambda_b = (380, 500)$  nm

The Atmospheric Rendering implementation selected the wavelengths:

- $\lambda_r = 650$  nm
- $\lambda_g = 510$  nm
- $\lambda_b = 475$  nm

### 1.2 Atmospheric Boundary

The atmospheric rendering algorithm models the atmosphere as the region where the effects of the atmosphere are non-negligible, extending from the Earth's surface to an atmospheric boundary.

The Atmospheric Rendering implementation uses the following constants for these radii.

- Radius of the planet:  $R_p = 6371000$  m
- Radius of the atmospheric boundary:  $R_a = 6471000$  m

### 1.3 Atmospheric Particles

The atmospheric rendering algorithm models two types of particles.

- Smaller particles (e.g. air molecules such as oxygen, nitrogen and carbon dioxide) are modeled by Rayleigh scattering.
- Larger particles (e.g. ice crystals, water droplets, dust and air pollution) are modeled by Mie scattering.

### 1.4 Density Function

The density function expresses the decrease in atmospheric density in dependence on  $h$ , the altitude of a point  $P$  over the ground.

Rayleigh/Mie density function,  $p_{R,M}(h)$ :

$$p_{R,M}(h) = \exp\left(-\frac{h}{H_{R,M}}\right)$$

Where  $H_R \approx 8000m$  and  $H_M \approx 1200m$  are the Rayleigh/Mie scale heights (e.g. the altitude where the density of particles scales down by a  $\frac{1}{e}$  term).

### 1.5 Phase Function

The phase function expresses the relative amount of light that is scattered in a particular direction due to interactions with a particle.

Rayleigh scattering phase function,  $F_R$ :

$$F_R(\cos(\theta)) = \frac{3}{4}(1 + \cos^2(\theta))$$

Where the scattering angle  $\theta$  represents the angle between the incoming light ray and the scattered light ray.

$$\cos(\theta) = \text{dot}(L_{Incoming}, L_{Scattered})$$

The Rayleigh scattering phase function  $F_R$  may be modified, in practice, to produce more natural results given simplifications introduced for the scattering intensity parameterization.

$$F_R(\cos(\theta)) = \frac{8}{10} \left( \frac{7}{5} + \frac{1}{2} \cos^2(\theta) \right)$$

Mie scattering phase function,  $F_M$ :

$$F_M(\cos(\theta)) = \frac{3(1-g^2)}{2(2+g^2)} \frac{(1+\cos^2(\theta))}{(1+g^2+2g\cos(\theta))^{\frac{3}{2}}}$$

The parameter  $g$  is an asymmetry factor denoting the width of the forward lobe. Typical values of  $g$  are in the range  $[-0.75, -0.999]$  and the Atmospheric Rendering implementation uses a default value of  $g = -0.85$ .

## 1.6 Scattering Coefficient

The scattering coefficients  $\beta_{R,M}$  represent the probability of light being scattered as it travels through a medium.

The scattering coefficients  $\beta_{R,M}$  are defined in terms of a Rayleigh/Mie particle polarizability constants  $\alpha_{R,M}$ .

$$\alpha_{R,M} = \frac{2\pi^2 (n_e^2 - 1)^2}{3N_{R,M}^2}$$

$$\beta_R(\lambda) = 4\pi \frac{N_R}{\lambda^4} \alpha_R$$

$$\beta_M = 4\pi N_M \alpha_M$$

The following constants are used to compute the scattering coefficients:

- Index of refraction of the Earth's atmosphere at sea level:  $n_e = 1.0003$
- Rayleigh particles molecular number density of the Earth's atmosphere at sea level:  $N_R = 2.454e25$
- Mie particles molecular number density of the Earth's atmosphere at sea level:  $N_M = UNDEFINED$

The Atmospheric Rendering implementation and the Efficient and Dynamic Atmospheric Scattering paper use the following equations to compute the scattering coefficients. The equation for  $\beta_R(\lambda)$  matches the previous definition after expanding  $\alpha_R$ . See the Efficient and Dynamic Atmospheric Scattering paper for an explanation of  $\beta_M$ .

$$\beta_R(\lambda) = \frac{8\pi^3 (n_e^2 - 1)^2}{3N_R\lambda^4}$$

$$\beta_R(r, g, b) = (6.55e - 6, 1.73e - 5, 2.30e - 5)$$

$$\beta_M = 2e - 6$$

## 1.7 Extinction Coefficient

The extinction coefficient represents the probability of light being scattered or absorbed as it passes through a medium.

The Efficient and Dynamic Atmospheric Scattering paper approximates the extinction coefficients.

$$\beta_R^e = \beta_R$$

$$\beta_M^e = \frac{\beta_M}{0.9}$$

## 1.8 Transmittance

The transmittance function  $T(P_1, P_2, \lambda)$  expresses the amount of attenuated light after it passes between two points through a medium.

$$T(P_1, P_2, \lambda) = \exp(-t(P_1, P_2, \lambda))$$

$$t(P_1, P_2, \lambda) = \sum_{i \in R, M} \beta_i^e(\lambda) \int_{P_1}^{P_2} p_i(h(P)) ds$$

Where the parameters are defined:

- $P$ : Sample point parameterized by  $s$ ,  $P = P_1 + s(P_2 - P_1)$
- $h$ : Height is parameterized by  $P$ ,  $h(P) = |P| - R_p$

The light ray may change direction as it interacts with particles while passing through a medium. Consider a light ray which passes between the points  $P_1, P_2, P_3$  where the point  $P_2$  represents an interaction which changes the direction of the light ray. The transmittance between the points  $P_1, P_2, P_3$  may be computed as the product of the transmittance between each segment.

$$T(P_1, P_2, \lambda) \cdot T(P_2, P_3, \lambda) = \exp(-t(P_1, P_2, \lambda)) \cdot \exp(-t(P_2, P_3, \lambda))$$

The implementation may utilize the laws of exponents rule for product of powers to optimize the computation.

$$a^m \cdot a^n = a^{m+n}$$

Where the functions  $t()$  may be rearranged in order to group similar terms.

$$T(P_1, P_2, \lambda) \cdot T(P_2, P_3, \lambda) = \exp(-t(P_1, P_2, \lambda) - t(P_2, P_3, \lambda))$$

## 1.9 Numerical Integration

The atmospheric integrals must be solved using numerical integration due to complexity of the equations.

The trapezoidal rule may be applied to approximate the area of the region under the graph of the function  $f(x)$  as a trapezoid.

$$\int_a^b f(x) dx \approx (b - a) \cdot \frac{1}{2} (f(a) + f(b))$$

Where the accuracy of the solution may be improved by reducing the step size  $\nabla x_k$ .

$$\int_a^b f(x) dx \approx \sum_{k=1}^N \frac{f(x_{k-1}) + f(x_k)}{2} \nabla x_k$$

The Rendering Parametrizable Planetary Atmospheres with Multiple Scattering in Real-Time paper uses  $N = 30$  steps for each integration with a variable step size  $\nabla x_k$ .

### 1.10 Spectral Intensity of Incident Light

The Atmospheric Rendering implementation defines the spectral intensity of incident light  $I_I(\lambda)$  from the Sun.

$$I_I(\lambda) = \text{SpectralIrridience}(\lambda) \cdot \text{Exposure} \cdot \text{SpectralToRGB}(\lambda)$$

The spectral irradiance measures the power density of solar radiation at specific wavelengths (from measured values found in tables).

$$\text{SpectralIrridience}(r, g, b) = (0.1526, 0.191, 0.208)$$

The exposure represents the amount of light exposure which scales the overall intensity.

$$\text{Exposure} = 1.0$$

The spectral to RGB constants are used to convert specific wavelengths into high dynamic range RGB values. These constants were calculated by converting wavelengths into CIE XYZ color space, then converting XYZ to RGB, followed by normalization and scaling.

$$\text{SpectralToRGB}(r, g, b) = (133.3209, 88.51855, 112.7552)$$

The spectral intensity of incident light  $I_I(r, g, b)$ :

$$I_I(r, g, b) = (20.344770, 16.907042, 23.453083)$$

### 1.11 Tone Mapping and Gamma Correction

The scattering intensity equations inherently output high dynamic range (HDR) intensities and must be transformed for display on standard devices.

Tone mapping transforms the high dynamic range (HDR) intensities such that the colors are mapped to a displayable range while preserving contrast in low-intensity areas and compressing high-intensity values.

$$\text{ToneMapping}(r, g, b) = 1.0 - \exp(-(r, g, b))$$

Gamma correction helps to distribute the compressed values more evenly across the perceptual range of human vision.

$$\text{GammaCorrection}(r, g, b) = (r, g, b)^{1.0/2.2}$$

The combined tone mapping and gamma correction transformation of the scattering intensity  $I_S(r, g, b)$ .

$$I_S(r, g, b) = (1.0 - \exp(-I_S(r, g, b)))^{1.0/2.2}$$

## 2 Sky Rendering

### 2.1 Single-scattering

The single-scattering equation  $I_{S_{R,M}}^{(1)}$  describes the intensity of light that reaches an observer  $P_0$  looking in the direction  $V$  after exactly one scattering event.

$$I_{S_{R,M}}^{(1)}(P_0, V, L, \lambda) = I_I(\lambda) \cdot F_{R,M}(\text{dot}(L, -V)) \cdot \frac{\beta_{R,M}(\lambda)}{4\pi} \cdot \int_{P_a}^{P_b} p_{R,M}(h(P)) \cdot T(P_c, P, \lambda) \cdot T(P, P_a, \lambda) ds$$

Where the following parameters are defined:

- $P$ : Sample point parameterized by  $s$ ,  $P = P_a + s(P_b - P_a)$
- $h$ : Height is parameterized by  $P$ ,  $h(P) = |P| - R_p$
- $V$ : Viewing direction,  $V = \text{normalize}(P_b - P_a)$
- $L$ : Direction of light from the Sun
- $\theta$ : Scattering angle,  $\cos(\theta) = \text{dot}(L, -V)$
- $P_a$ : First point along  $V$  where the atmosphere is nonzero (e.g.  $P_0$  or the atmospheric boundary).
- $P_b$ : Last point along  $V$  where the atmosphere is nonzero (e.g. the atmospheric boundary or the Earth's surface).
- $P_c$ : The nearest intersection point along the ray from  $P$  in the direction of the Sun (e.g. the atmosphere boundary or the Earth's surface). If the ray intersects the Earth then the point  $P$  is shadowed by the Earth and does not contribute to the single-scattering intensity. However, the point  $P$  may still contribute to the multiple scattering intensity as described in the next section.

The phase function  $F_{R,M}$  can be excluded from integration if we assume all light rays coming from the Sun are parallel.

The total intensity of the single-scattering light:

$$I_S^{(1)} = I_{S_R}^{(1)} + I_{S_M}^{(1)}$$

## 2.2 Multiple-scattering

The multiple-scattering equation  $I_{S_{R,M}}^{(k)}$  describes the intensity of light that reaches an observer  $P_0$  looking in the direction  $V$  for the  $k$ th scattering event.

$$I_{S_{R,M}}^{(k)}(P_0, V, L, \lambda) = \frac{\beta_{R,M}(\lambda)}{4\pi} \cdot \int_{P_a}^{P_b} G_{R,M}^{(k-1)}(P, V, L, \lambda) \cdot p_{R,M}(h(P)) \cdot T(P, P_a, \lambda) ds$$

Where the gather-scattering equation  $G_{R,M}^{(k)}$  describes the intensity of light that reaches the point  $P$  that is scattered from all directions  $\omega$  towards the observer for the  $k$ th order scattering event.

$$G_{R,M}^{(k)}(P, V, L, \lambda) = \int_{4\pi} F_{R,M}(\text{dot}(-\omega, -V)) \cdot I_{S_{R,M}}^{(k)}(P, \omega, L, \lambda) d\omega$$

Where the following parameters are defined:

- $\omega$ : Gathering direction for the  $k$ th order scattered light source
- $\theta$ : Scattering angle,  $\cos(\theta) = \text{dot}(-\omega, -V)$

The first order of  $I_{S_{R,M}}^{(k)}$  is initialized with the single-scattering output  $I_{S_{R,M}}^{(1)}$  while subsequent orders of  $I_{S_{R,M}}^{(k)}$  are computed iteratively using the previous output  $I_{S_{R,M}}^{(k-1)}$ .

Observe that the light vector  $L$  is used in computation of the phase function  $F_{R,M}$  for the single-scattering equation  $I_{S_{R,M}}^{(1)}$ , but not for the gather-scattering equation  $G_{R,M}^{(k)}$ . As a result, the phase function  $F_{R,M}$  in the gather-scattering equation  $G_{R,M}^{(k)}$  may not be excluded from integration because  $\theta$  depends on the integration variable  $\omega$ . The light vector  $L$  is also required to parameterize the Sun-Zenith angle for all scattering orders as shown in subsequent sections.

The total intensity of the multiple-scattering light:

$$I_S = \sum_{k=1}^K I_{S_R}^{(k)} + I_{S_M}^{(k)} = I_{S_R} + I_{S_M}$$



### 2.3 Scattering Equation Factorization

The following derivation factors the constant phase function  $F_{R,M}(\text{dot}(L, -V))$  and the spectral intensity of incident light  $I_I(\lambda)$  from the scattering equations.

The factored single-scattering equation  $\bar{I}_{S_{R,M}}^{(1)}$ :

$$\bar{I}_{S_{R,M}}^{(1)}(P_0, V, L, \lambda) = \frac{\beta_{R,M}(\lambda)}{4\pi} \cdot \int_{P_a}^{P_b} p_{R,M}(h(P)) \cdot T(P_c, P, \lambda) \cdot T(P, P_a, \lambda) ds$$

Where  $I_{S_{R,M}}^{(1)}$ :

$$I_{S_{R,M}}^{(1)}(P_0, V, L, \lambda) = I_I(\lambda) \cdot F_{R,M}(\text{dot}(L, -V)) \cdot \bar{I}_{S_{R,M}}^{(1)}(P_0, V, L, \lambda)$$

The factored multiple-scattering equation  $\bar{I}_{S_{R,M}}^{(k)}$ :

$$\bar{I}_{S_{R,M}}^{(k)}(P_0, V, L, \lambda) = \frac{\beta_{R,M}(\lambda)}{4\pi} \cdot \int_{P_a}^{P_b} \bar{G}_{R,M}^{(k-1)}(P, V, L, \lambda) \cdot p_{R,M}(h(P)) \cdot T(P, P_a, \lambda) ds$$

Where  $I_{S_{R,M}}^{(k)}$ :

$$I_{S_{R,M}}^{(k)}(P_0, V, L, \lambda) = I_I(\lambda) \cdot F_{R,M}(\text{dot}(L, -V)) \cdot \bar{I}_{S_{R,M}}^{(k)}(P_0, V, L, \lambda)$$

The factored gather-scattering equation  $\bar{G}_{R,M}^{(k)}$ :

$$\bar{G}_{R,M}^{(k)}(P, V, L, \lambda) = \int_{4\pi} F_{R,M}(\text{dot}(-\omega, -V)) \cdot \bar{I}_{S_{R,M}}^{(k)}(P, \omega, L, \lambda) d\omega$$

Where  $G_{R,M}^{(k)}$ :

$$G_{R,M}^{(k)}(P, V, L, \lambda) = I_I(\lambda) \cdot F_{R,M}(\text{dot}(L, -V)) \cdot \bar{G}_{R,M}^{(k)}(P, V, L, \lambda)$$

The total scattering intensity using the factored equations:

$$I_S = I_I(\lambda) \cdot (F_R(\text{dot}(L, -V)) \cdot \bar{I}_{S_R} + F_M(\text{dot}(L, -V)) \cdot \bar{I}_{S_M})$$

This factorization includes two important properties that facilitate an efficient rendering implementation. First, the wavelength dependent components,  $I_I(\lambda)$  and  $\bar{I}_{S_R}$ , may be separated from the wavelength independent component  $\bar{I}_{S_M}$ . The spectral intensity of incident light  $I_I(\lambda)$  may be applied directly in the fragment shader and the factored scattering intensity  $\bar{I}_S$  may be determined by performing a single 3D texture fetch. The Rayleigh factored scattering intensity  $\bar{I}_{S_R}$  is stored in the RGB channels while the Mie factored scattering intensity  $\bar{I}_{S_M}$  is stored in the alpha channel. Second, the constant phase function  $F_{R,M}(\text{dot}(L, -V))$  may be applied directly in the fragment shader which partially accounts for the omitted Sun-View Azimuth parameter. These properties are fundamental to the scattering intensity parameterization that is described in the next section.

## 2.4 Scattering Intensity Parameterization

To precompute every scattering intensity from every position  $P_0(x, y, z)$ , in every viewing direction  $V(x, y, z)$  and every light direction  $L(x, y, z)$  would require 9 parameters. However, by taking advantage of symmetries and making a few assumptions the parameter count may be reduced to 4 scalar parameters.


- Altitude:  $h \in [0, H_a]$  where  $H_a = R_a - R_p$
- View-Zenith Angle:  $\phi \in [0, \pi]$  where  $\cos(\phi) = \text{dot}(V, \text{Zenith})$
- Sun-Zenith Angle  $\delta \in [0, \pi]$  where  $\cos(\delta) = \text{dot}(-L, \text{Zenith})$
- Sun-View Azimuth  $\omega \in [0, \pi]$  where  $\cos(\omega) = \text{dot}(\text{proj}(V), \text{proj}(-L))$

Where the Zenith is for the point  $P_0$  and  $\text{proj}(X)$  takes a unit vector and projects it onto the horizontal plane perpendicular to the Zenith:

$$\text{Zenith} = \text{normalize}(P_0)$$

$$\text{proj}(X) = \text{normalize}(X - \text{dot}(X, \text{Zenith}) \cdot \text{Zenith})$$

The following diagram shows canonical form of the scattering intensity parameterization.

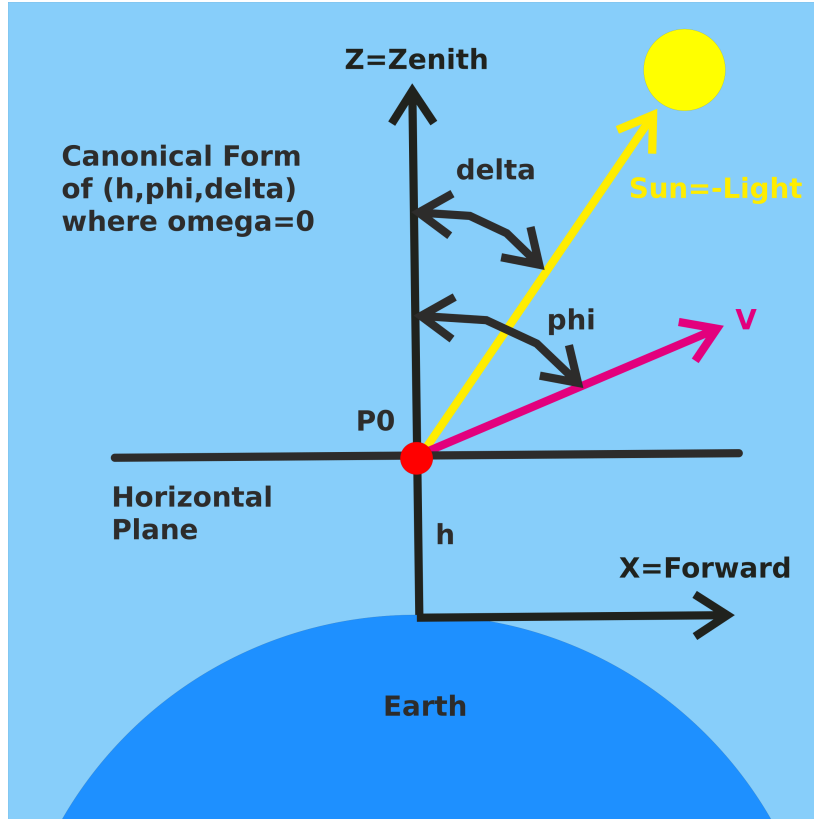

The parameter  $h$  may be converted to the canonical form  $P_0$ .

$$P_0 = (0, 0, h + R_p)$$

The parameters  $(h, \phi, \delta)$  may be converted to the canonical form vectors  $V$  and  $L$  by using the spherical coordinate system.

$$x = r \sin(\Theta) \cos(\Phi)$$

$$y = r \sin(\Theta) \sin(\Phi)$$

$$z = r \cos(\Theta)$$

Therefore  $V$ ,  $Sun$  and  $L$  are defined where  $r = 1$ ,  $\Theta = \phi$  for  $V$ ,  $\Theta = \delta$  for  $Sun$  and  $\Phi = \omega = 0$ .

$$V = (\sin(\phi), 0, \cos(\phi))$$

$$Sun = (\sin(\delta), 0, \cos(\delta))$$

$$L = -Sun$$

The parameters  $(h, \cos(\phi), \cos(\delta))$  may be converted to 3D texture coordinates  $(u, v, w)$  for array lookups. There are many different possible choices for the mapping from parameter to texture coordinate. The most straightforward mapping described by the Efficient and Dynamic Atmospheric Scattering paper is a linear mapping.

$$u = \frac{h}{R_a - R_p}$$

$$v = \frac{\cos(\phi) + 1}{2}$$

$$w = \frac{\cos(\delta) + 1}{2}$$

However, the mappings are typically replaced with ad-hoc non-linear mappings to optimize the parameterization space by eliminating unused values and improving precision for critical values. The Atmospheric Rendering implementation uses the following non-linear mappings from parameters to 3D texture coordinates.

$$u = \sqrt{\frac{h}{R_a - R_p}}$$

$$v = 0.5 \cdot \left( 1 + \text{sign}(\cos(\phi)) \cdot (|\cos(\phi)|)^{\frac{1}{3}} \right)$$

$$w = 0.5 \cdot \left( 1 + \text{sign}(\cos(\delta)) \cdot (|\cos(\delta)|)^{\frac{1}{3}} \right)$$


These ad-hoc non-linear mappings may be converted back from 3D texture coordinates to parameters as follows.

$$h = u^2 (R_a - R_p)$$

$$\cos(\phi) = (2v - 1)^3$$

$$\cos(\delta) = (2w - 1)^3$$

The following diagram shows the linear mapping, non-linear mapping and 3D texture coordinates of the scattering intensity  $I_S$ .

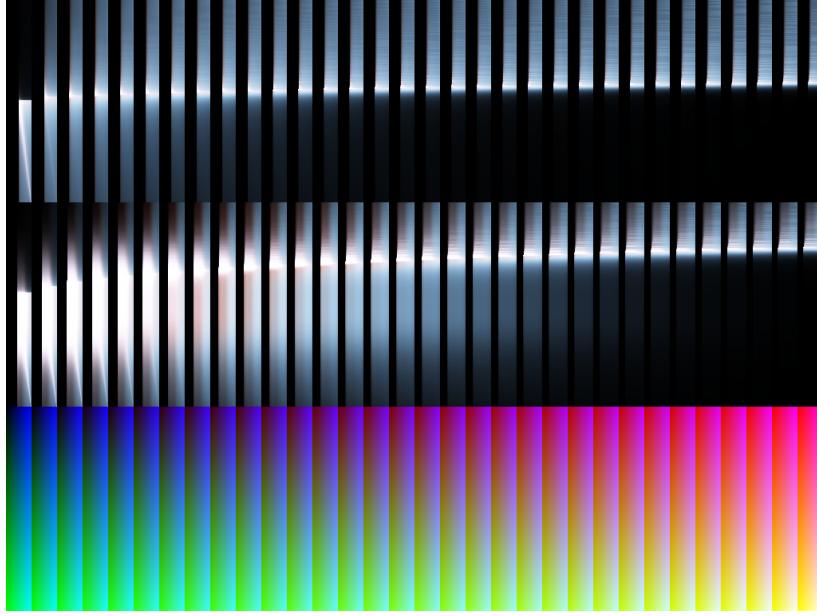

The 3D array indices  $(x, y, z)$  with dimensions  $(width, height, depth)$  may be converted to 3D texture coordinates  $(u, v, w)$  as follows.

$$(u, v, w) = \left( \frac{x}{width - 1}, \frac{y}{height - 1}, \frac{z}{depth - 1} \right)$$

The 3D array indices  $(x, y, z)$  may be interpreted as a 1D array index  $(i)$  as follows.

$$i = x + y * width + z * width * height$$

The Efficient and Dynamic Atmospheric Scattering paper uses the following texture dimensions where optional optimizations discussed for  $v$  component.

$$(width, height, depth) = (32, 256|128|64, 32)$$

To reduce the parameter count, the paper proposes to omit the parameter  $\omega$  from precomputation. This omission causes uniformity of the atmospheric color with respect to  $\omega$  and is primarily visible during sunsets in parts of the sky

where there is no direct illumination. Two techniques are proposed to address the omission of  $\omega$ . First, the modified Rayleigh scattering phase function  $F_R$  ensures that the darkest area of the sky during sunset is on the opposite side of the sky from the Sun. Second, the parameter  $\omega$  is dependent on the scattering angle  $\theta$ . By evaluating the constant phase function  $F_{R,M}(\dot{L}, -V)$  during rendering, we are able to reduce the uniformity of the atmospheric color with respect to  $\omega$ .

**Note:** The the Sun-View Azimuth  $\omega$  is a separate variable from the gathering direction  $\omega$  described in other sections.

## References

- Rendering Parametrizable Planetary Atmospheres with Multiple Scattering in Real-Time
  - [http://www.klayge.org/material/4\\_0/Atmospheric/Rendering%20Parametrizable%20Planetary%20Time.pdf](http://www.klayge.org/material/4_0/Atmospheric/Rendering%20Parametrizable%20Planetary%20Time.pdf)
- Atmospheric Rendering
  - <https://github.com/danielshervheim/atmosphere>
- Efficient and Dynamic Atmospheric Scattering
  - <https://publications.lib.chalmers.se/records/fulltext/203057/203057.pdf>
- Display of The Earth Taking into Account Atmospheric Scattering
  - [http://nishitalab.org/user/nis/cdrom/sig93\\_nis.pdf](http://nishitalab.org/user/nis/cdrom/sig93_nis.pdf)
- Real-Time Rendering of Planets with Atmospheres
  - <https://naos-be.zcu.cz/server/api/core/bitstreams/235c2478-5bff-4510-b22f-d5d93001d574/content>
- Accurate Atmospheric Scattering
  - <https://developer.nvidia.com/gpugems/gpugems2/part-ii-shading-lighting-and-shadows/chapter-16-accurate-atmospheric-scattering>
- Precomputed Atmospheric Scattering
  - [http://www.klayge.org/material/4\\_0/Atmospheric/Precomputed%20Atmospheric%20Scattering.p](http://www.klayge.org/material/4_0/Atmospheric/Precomputed%20Atmospheric%20Scattering.p)
  - <http://evasion.inrialpes.fr/~Eric.Bruneton/>
  - [https://github.com/ebruneton/precomputed\\_atmospheric\\_scattering](https://github.com/ebruneton/precomputed_atmospheric_scattering)
- Deferred Rendering of Planetary Terrains with Accurate Atmospheres

- <https://www.gamedevs.org/uploads/deferred-rendering-of-planetary-terrains-with-accurate-atmospheres.pdf>
- A Scalable and Production Ready Sky and Atmosphere Rendering Technique
  - <https://sebh.github.io/publications/egsr2020.pdf>
- Solar System
  - <https://github.com/SebLague/Solar-System>
  - <https://www.youtube.com/watch?v=DxfEbulyFcY>
- Trapezoidal Rule
  - [https://en.wikipedia.org/wiki/Trapezoidal\\_rule](https://en.wikipedia.org/wiki/Trapezoidal_rule)