


[TKA]

knuckle boom

10.900


diagram

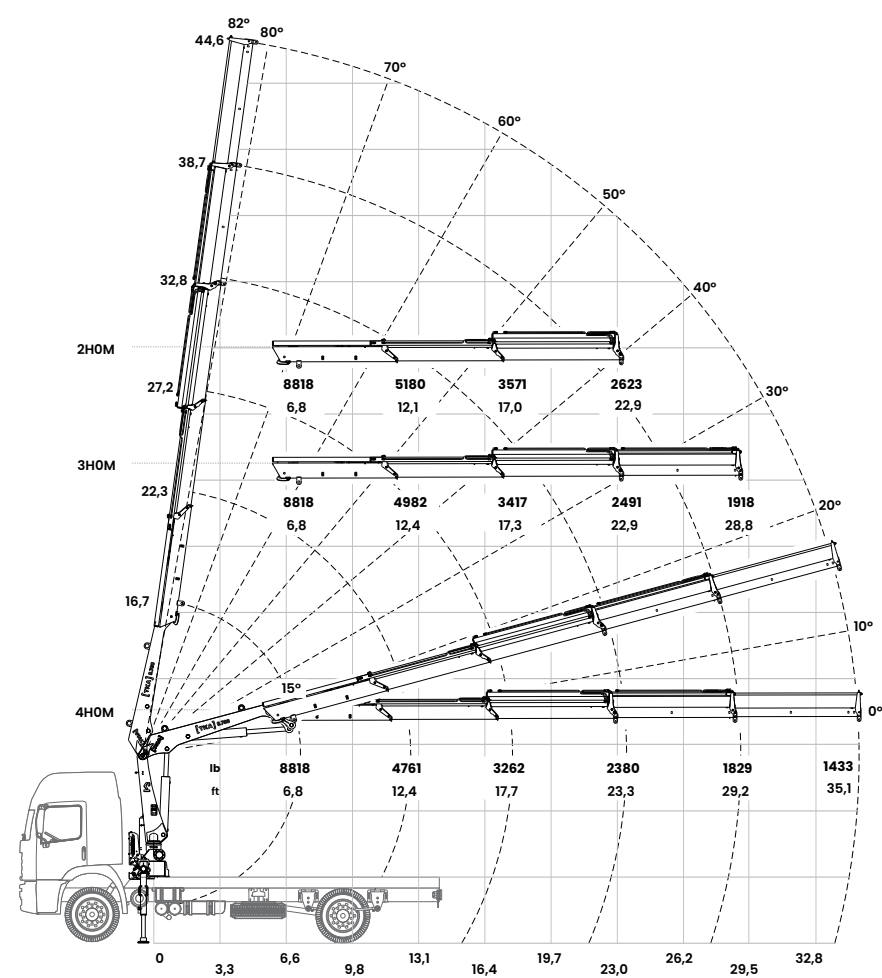

specification

max. manual vertical reach	44,6 ft
max. manual horizontal reach	35,1 ft
max. hydraulic vertical reach	44,6 ft
max. hydraulic horizontal reach	35,1 ft
front stabilizer spread	14,4 ft *
boom elevation angle	82°
slewing angle	400°
slewing torque	9,41 kN.m
max. operating pressure	3980 psi
dead weight - 2HOM / 3HOM	2623 lb / 2777 lb
dead weight - 4HOM	2910 lb
fitting space required	2,9 ft
oil tank capacity	18,49 gal
min. gross vehicle weight (GVW)	15432 lb**

dimensions

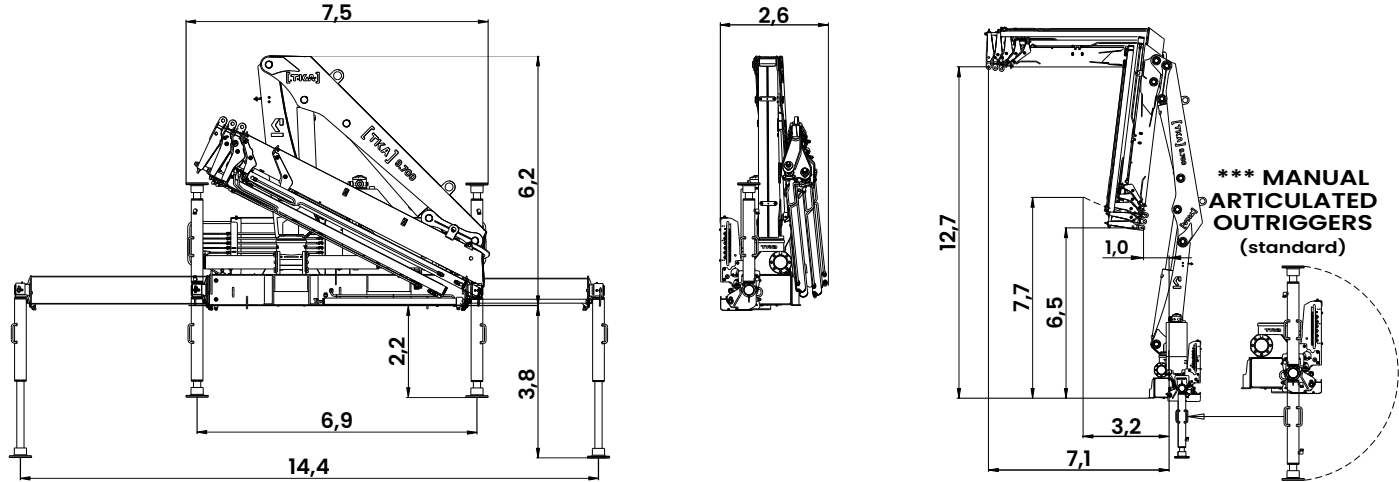

* front hydraulic outriggers spread optional ** through vehicle integration study *** manual articulated outriggers (standard)