


[TKA]

knuckle boom

12.900


diagram

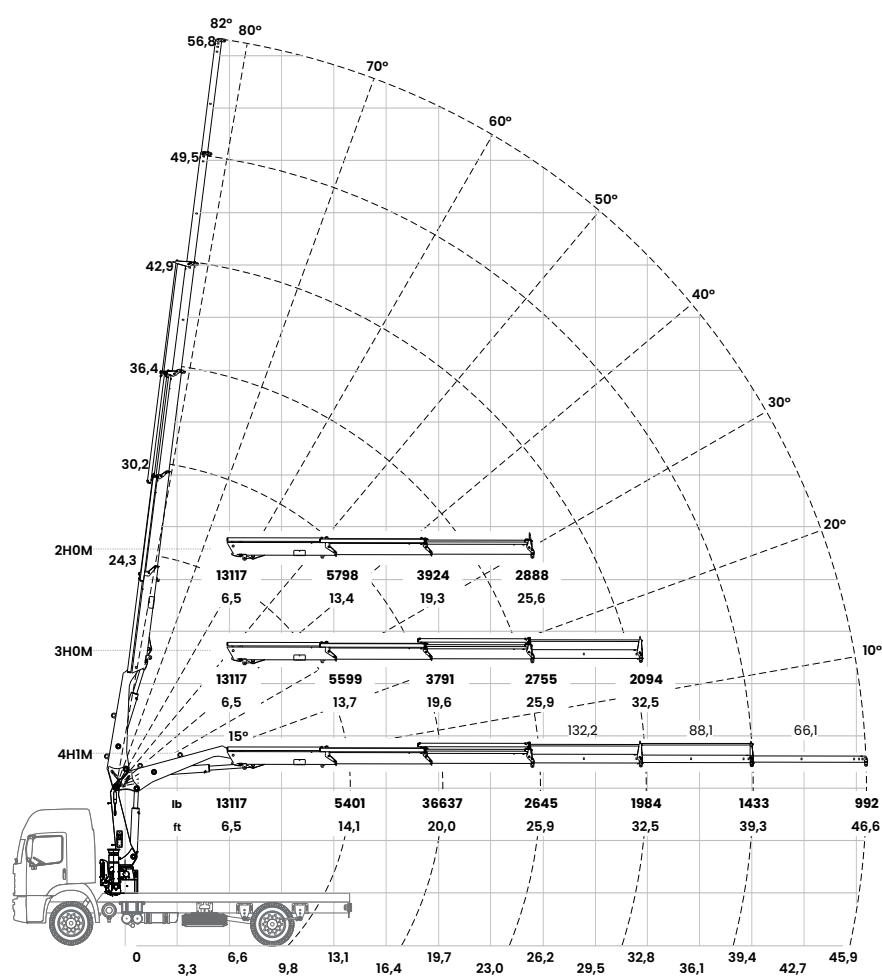

specification

max. manual vertical reach	56,8 ft
max. manual horizontal reach	46,6 ft
max. hydraulic vertical reach	49,5 ft
max. hydraulic horizontal reach	39,3 ft
front stabilizer spread	15,1 ft *
boom elevation angle	82°
slewing angle	400°
slewing torque	15,35 kN.m
max. operating pressure	3980 psi
dead weight – 2HOM / 3HOM	3020 lb / 3196 lb
dead weight – 4HOM / 4HIM	3351 lb / 3439 lb
fitting space required	2,2 ft
oil tank capacity	18,49 gal
min. gross vehicle weight (GVW)	24251 lb**

dimensions

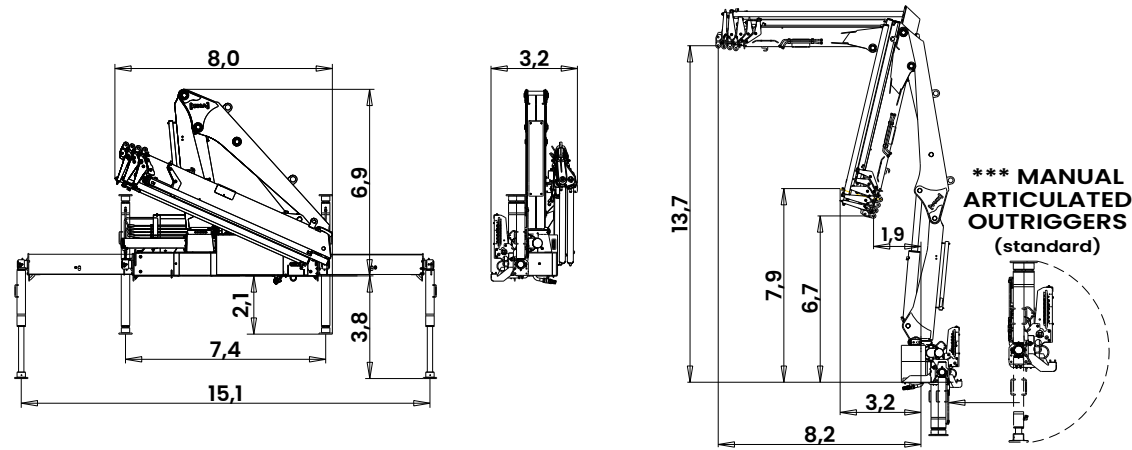

* front hydraulic outriggers spread optional ** through vehicle integration study *** manual articulated outriggers (standard)