


[TKA] knuckle boom

15.900




diagram

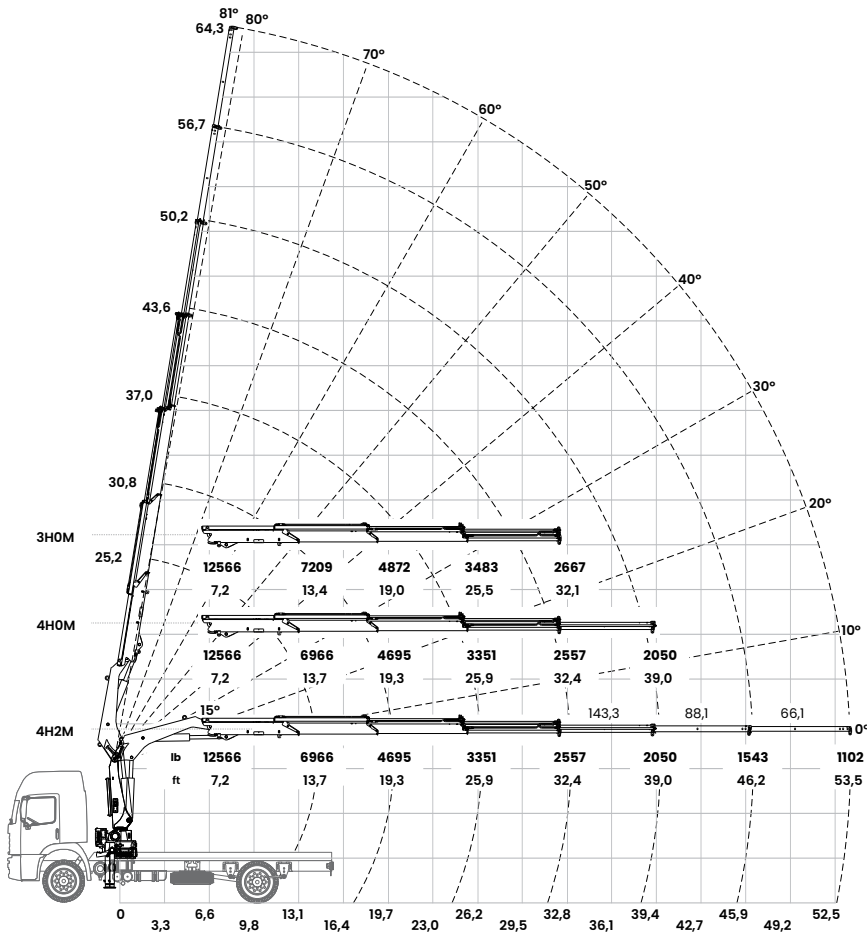

specification

max. manual vertical reach	64,3 ft
max. manual horizontal reach	53,5 ft
max. hydraulic vertical reach	50,2 ft
max. hydraulic horizontal reach	39,0 ft
front stabilizer spread	17,7 ft *
boom elevation angle	81°
slewing angle	360°
slewing torque	25,82 kN.m
max. operating pressure	3980 psi
dead weight - 3H0M / 4H0M	4232 lb / 4453 lb
dead weight - 4H1M / 4H2M	4541 lb / 4607 lb
fitting space required	3,9 ft
oil tank capacity	23,77 gal
min. gross vehicle weight (GVW)	24251 lb**

dimensions

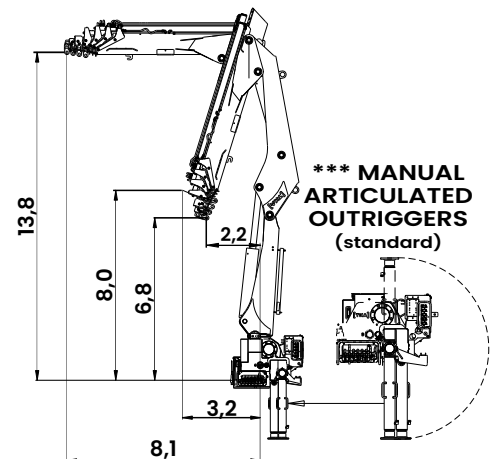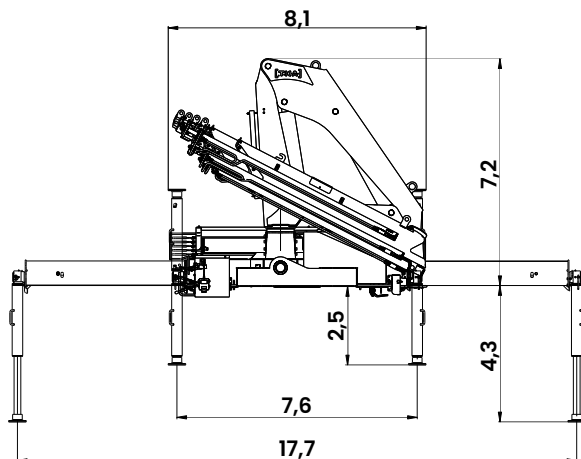

* front hydraulic outriggers spread optional

** through vehicle integration study

*** manual articulated outriggers (standard)