


[TKA] knuckle boom

18.900




diagram

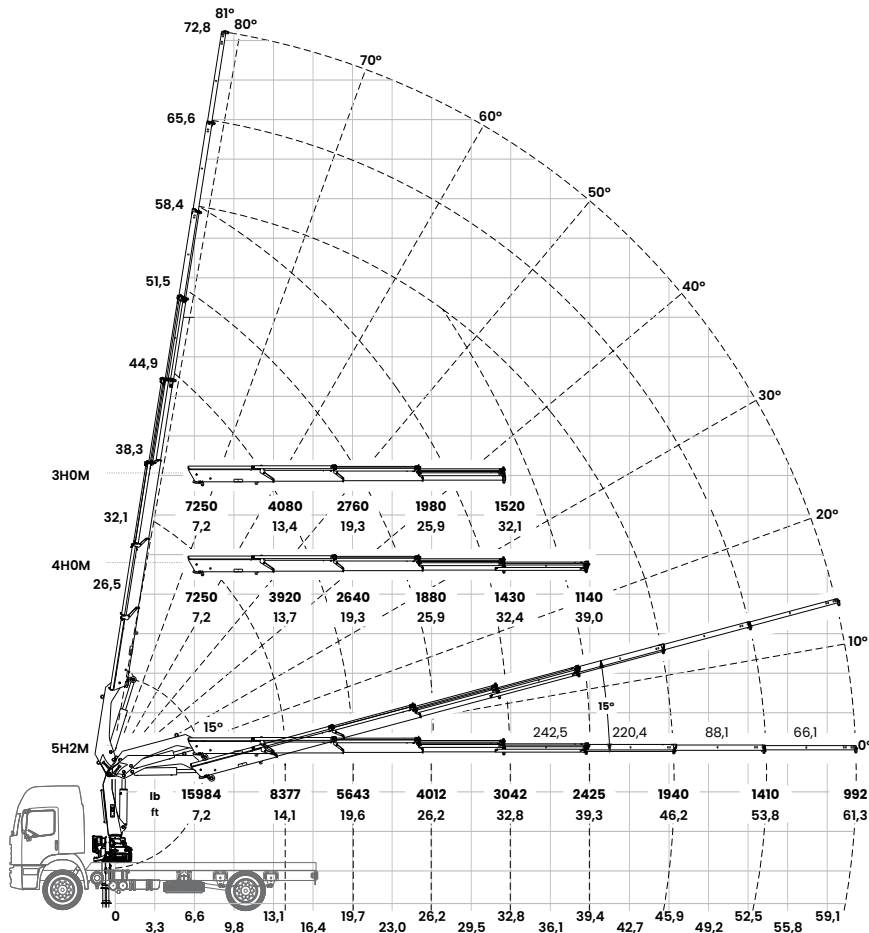

specification

max. manual vertical reach	72,8 ft
max. manual horizontal reach	61,4 ft
max. hydraulic vertical reach	58,4 ft
max. hydraulic horizontal reach	46,2 ft
front stabilizer spread	19,0 ft *
boom elevation angle	80°
slewing angle	400°
slewing torque	28,34 kN.m
max. operating pressure	3980 psi
dead weight - 3H0M / 4H0M	5070 lb / 5313 lb
dead weight - 5H0M / 5H1M / 5H2M	5511 lb / 5599 lb / 5665 lb
fitting space required	3,9 ft
oil tank capacity	26,41 gal
min. gross vehicle weight (GVW)	33069 lb **

dimensions

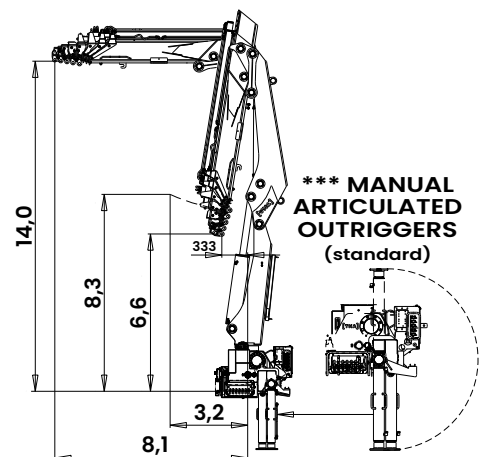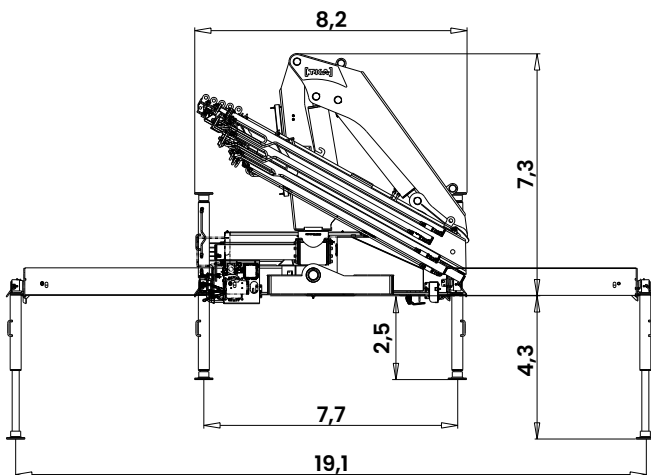

* front hydraulic outriggers spread optional

** through vehicle integration study

*** manual articulated outriggers (standard)