


[TKA] brazilian boom

20.700




diagram

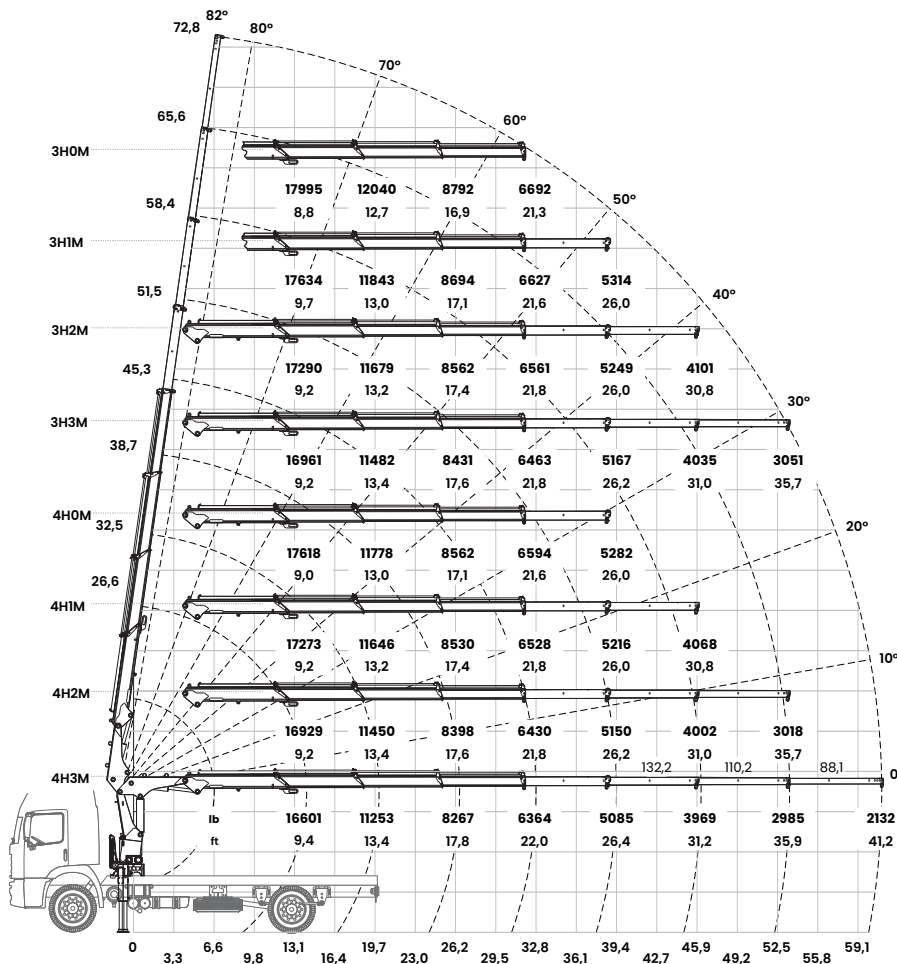

specification

max. manual vertical reach	72,8 ft
max. manual horizontal reach	61,4 ft
max. hydraulic vertical reach	51,5 ft
max. hydraulic horizontal reach	39,4 ft
front stabilizer spread	18,7 ft
boom elevation angle	82°
slewing angle	370°
slewing torque	40,79 kN.m
max. operating pressure	3771 psi
dead weight - 3H0M / 3H1M / 3H2M / 3H3M	5148 lb / 5302 lb / 5434 lb / 5545 lb
dead weight - 4H0M / 4H1M / 4H2M / 4H3M	5401 lb / 5534 lb / 5644 lb / 5732 lb
fitting space required	3,6 ft
oil tank capacity	26,41 gal
min. gross vehicle weight (GVW)	37479 lb*

dimensions

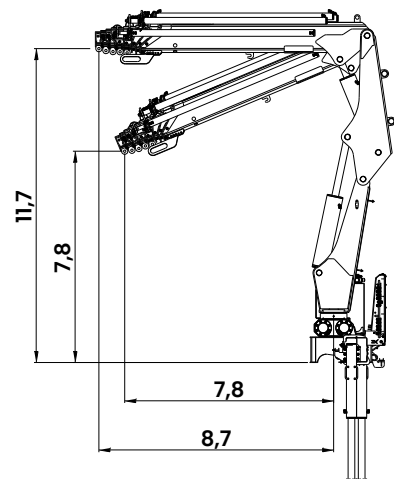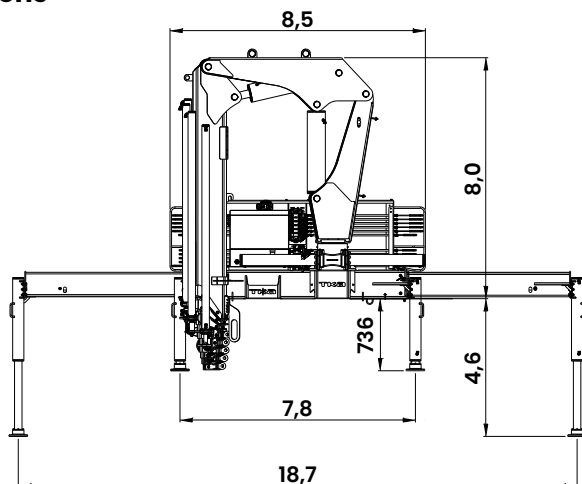

* through vehicle integration study