


[TKA] knuckle boom

30.900


diagram

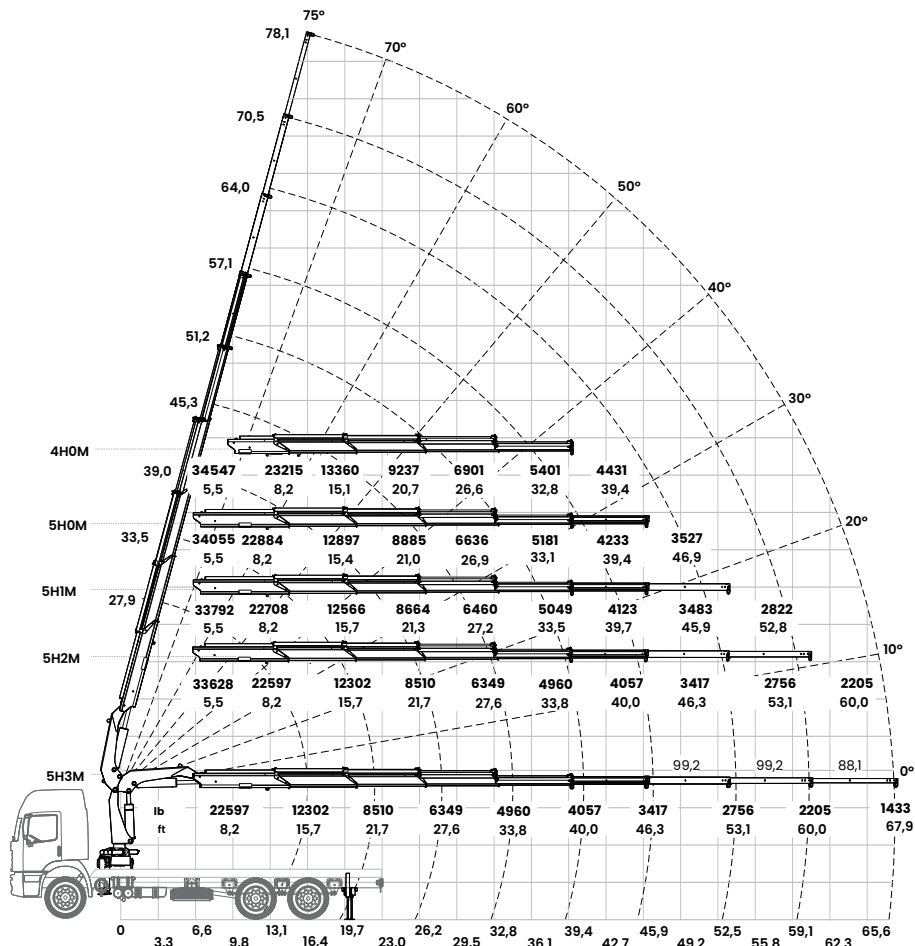

specification

max. manual vertical reach	78,1 ft
max. manual horizontal reach	67,9 ft
max. hydraulic vertical reach	57,1 ft
max. hydraulic horizontal reach	46,3 ft
front stabilizer spread	19,7 ft
boom elevation angle	75°
slewing angle	400°
slewing torque	37,39 kN.m
max. operating pressure	3980 psi
dead weight - 4H0M / 5H0M	7661 lb / 7959 lb
dead weight - 5H1M / 5H2M / 5H3M	8057 lb / 8157 lb / 8245 lb
fitting space required	4,9 ft
oil tank capacity	31,70 gal
min. gross vehicle weight (GVW)	48502 lb*

dimensions

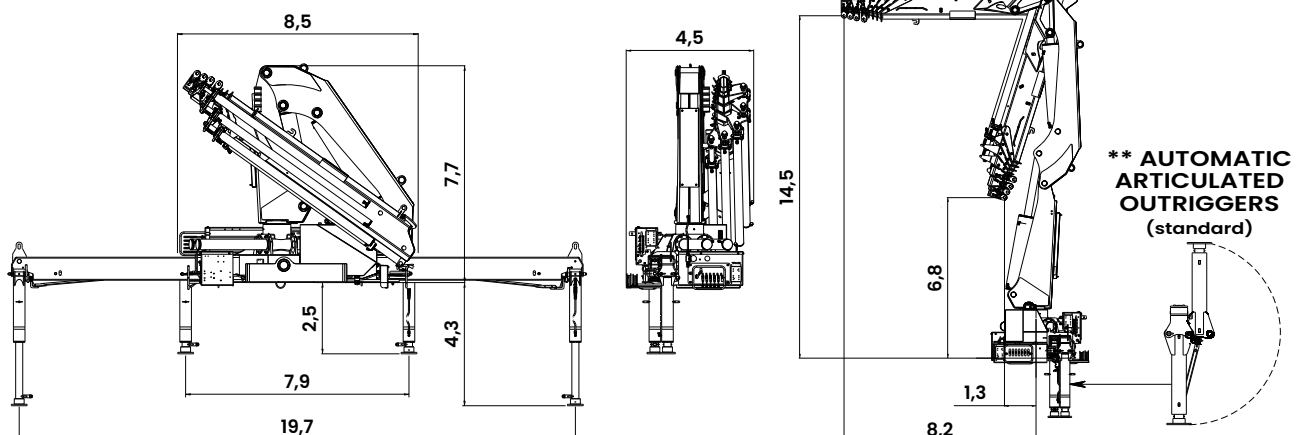

* through vehicle integration study ** automatic articulated outriggers (standard)