


diagram

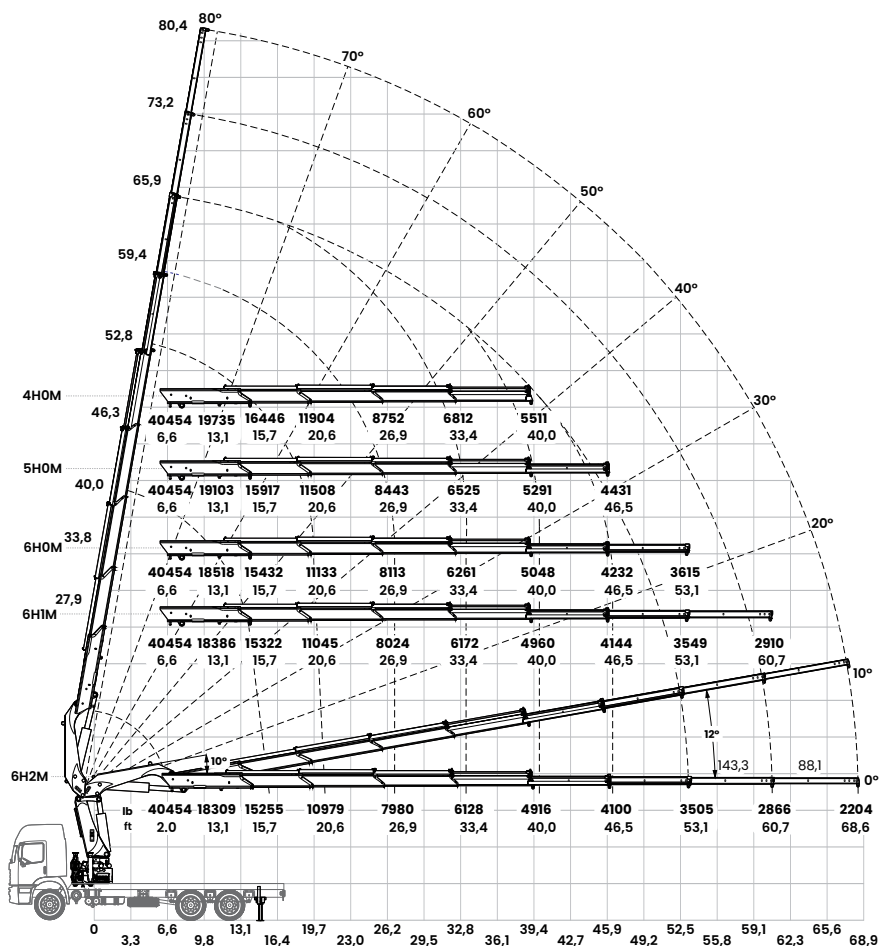

specification

max. manual vertical reach

80,4 ft

max. manual horizontal reach

68,6 ft

max. hydraulic vertical reach

65,9 ft

max. hydraulic horizontal reach

53,1 ft

front stabilizer spread

19,7 ft

boom elevation angle

80°

slewing angle

400°

slewing torque

37,39 kN.m

max. operating pressure

3980 psi

dead weight - 4H0M / 5H0M

8891 lb / 9218 lb

dead weight - 6H0M / 6H1M / 6H2M

9524 lb / 9665 lb / 9756 lb

fitting space required

4,9 ft

oil tank capacity

36,98 gal

min. gross vehicle weight (GVW)

50706 lb*

dimensions

