


[TKA] brazilian boom

41.900




diagram

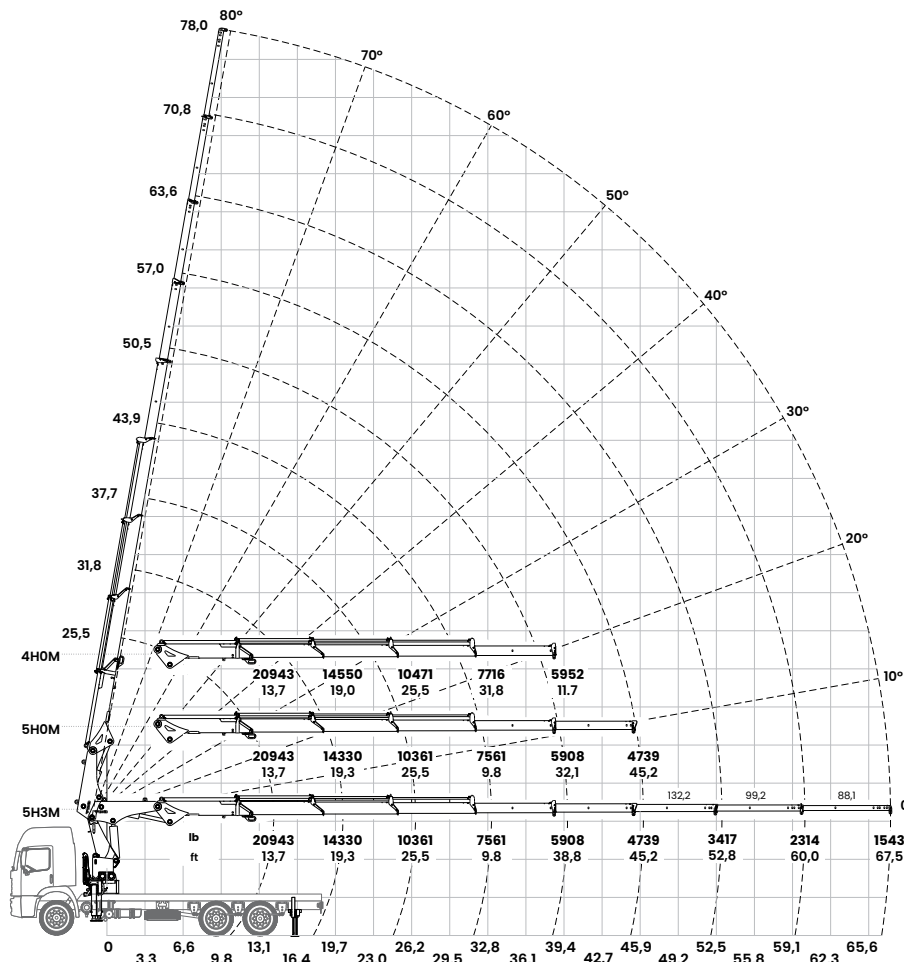

specification

max. manual vertical reach	78,0 ft
max. manual horizontal reach	67,5 ft
max. hydraulic vertical reach	57,0 ft
max. hydraulic horizontal reach	45,2 ft
front stabilizer spread	19,6 ft
boom elevation angle	80°
slewing angle	400°
slewing torque	37,36 kN.m
max. operating pressure	3980 psi
dead weight - 4H0M / 5H0M	7495 lb / 7804 lb
dead weight - 5H1M / 5H2M / 5H3M	7936 lb / 8024 lb / 8113 lb
fitting space required	2,4 ft
oil tank capacity	26,41 gal
min. gross vehicle weight (GVW)	50706 lb*

dimensions

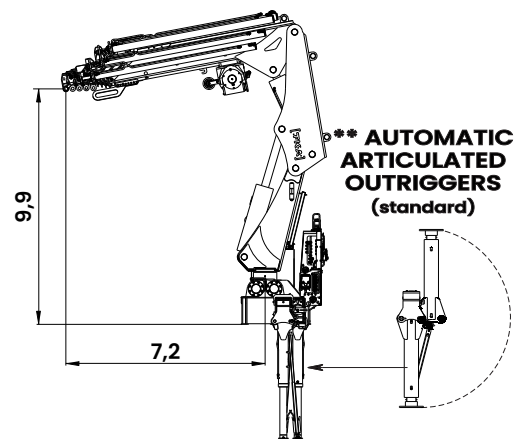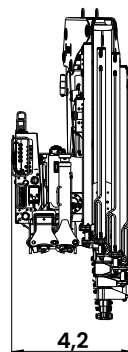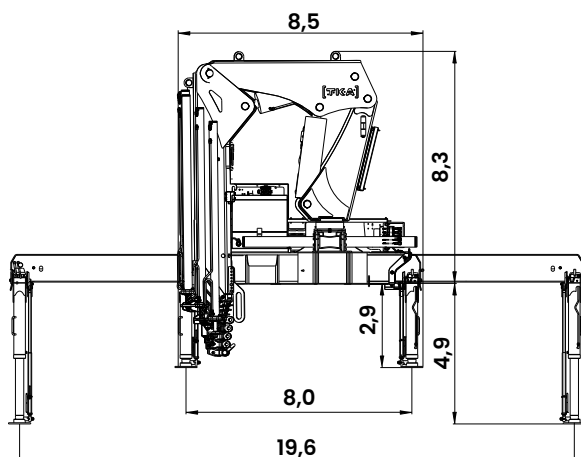

* through vehicle integration study ** automatic articulated outriggers (standard)