


diagram

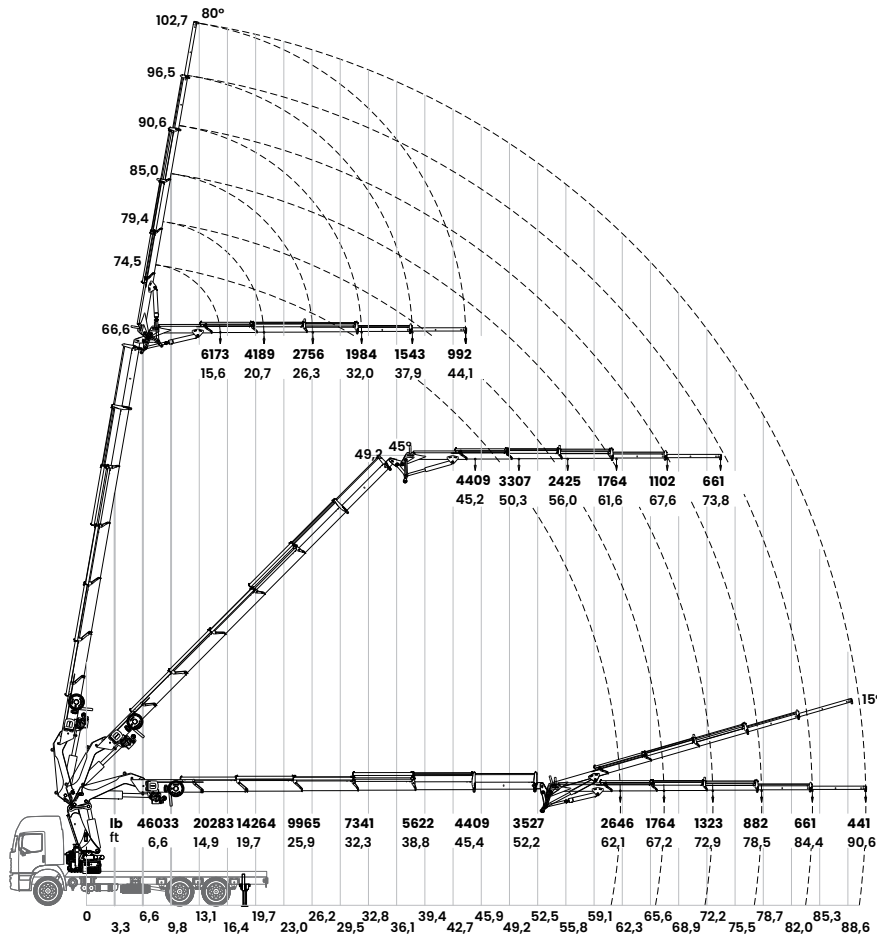

specification

max. manual vertical reach - 6HOM - fly jib
66,6 ft / 102,7 ft
max. manual horizontal reach - 6HOM - fly jib
52,2 ft / 90,6 ft
max. hydraulic vertical reach - 6HOM - fly jib
66,6 ft / 96,5 ft
max. hydraulic horizontal reach - 6HOM - fly jib
52,2 ft / 84,4 ft
front stabilizer spread
25,3 ft
boom elevation angle
80°
slewing angle
400°
slewing torque
66,09 kN.m
max. operating pressure
3980 psi
dead weight - 6HOM
12456 lb
dead weight - 6HOM + fly jib
14551 lb
fitting space required
5,6 ft
oil tank capacity
66,04 gal
min. gross vehicle weight (GVW)
50706 lb*

dimensions

