


diagram

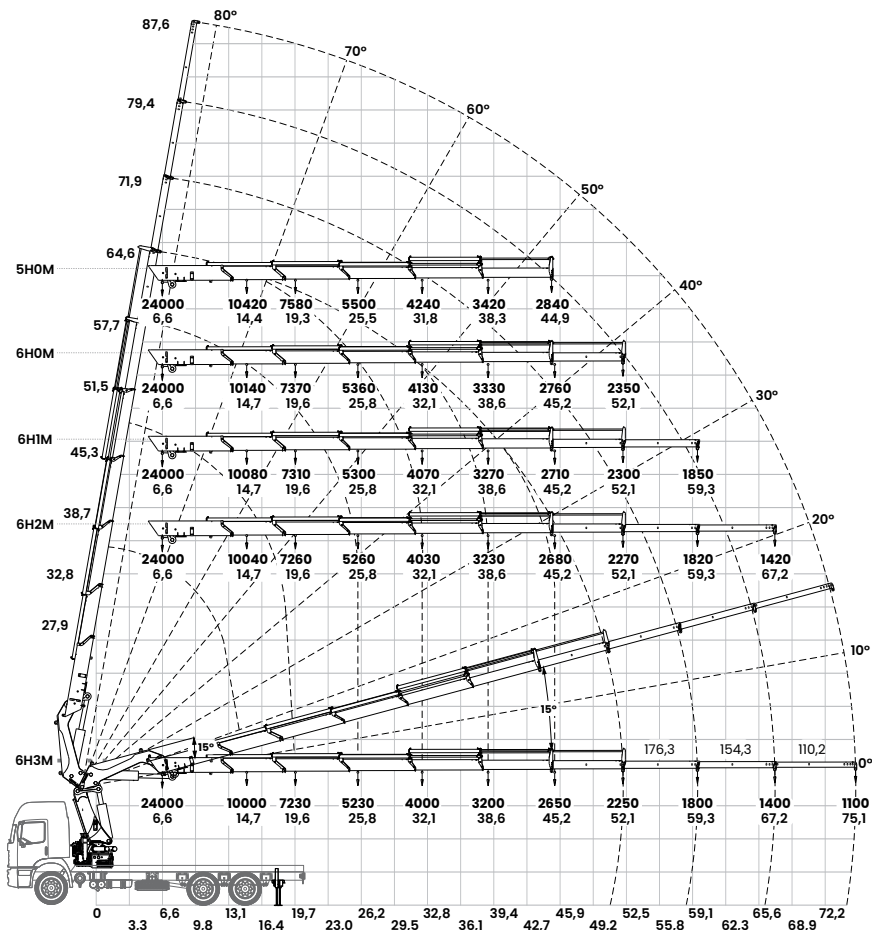

specification

max. manual vertical reach	87,6 ft
max. manual horizontal reach	75,1 ft
max. hydraulic vertical reach	64,6 ft
max. hydraulic horizontal reach	52,2 ft
front stabilizer spread	25,3 ft
boom elevation angle	80°
slewing angle	400°
slewing torque	66,09 kN.m
max. operating pressure	3980 psi
dead weight - 5H0M / 6H0M	12170 lb / 12456 lb
dead weight - 6H1M / 6H2M / 6H3M	12633 lb / 12787 lb / 12897 lb
fitting space required	5,6 ft
oil tank capacity	46,23 gal
min. gross vehicle weight (GVW)	50706 lb*

dimensions

