


diagram

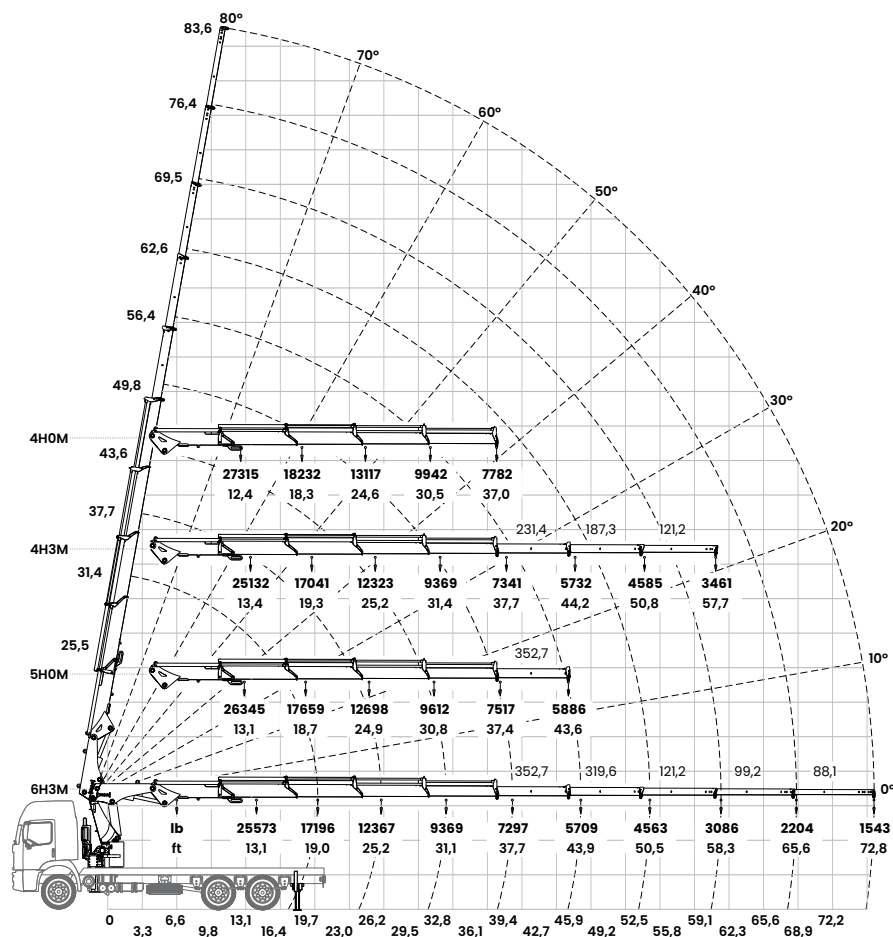

specification

max. manual vertical reach	83,6 ft
max. manual horizontal reach	72,8 ft
max. hydraulic vertical reach	62,6 ft
max. hydraulic horizontal reach	50,5 ft
front stabilizer spread	26,2 ft
boom elevation angle	80°
slewing angle	360°
slewing torque	51,28 kN.m
max. operating pressure	3980 psi
dead weight - 4H0M / 4H3M / 5H0M	9667 lb / 10207 lb / 10020 lb
dead weight - 6H0M / 6H1M / 6H2M / 6H3M	10340 lb / 10461 lb / 10560 lb / 10648 lb
fitting space required	4,3 ft
oil tank capacity	39,62 gal
min. gross vehicle weight (GVW)	50706 lb*

dimensions

