


[TKA] knuckle boom

6.700


diagram

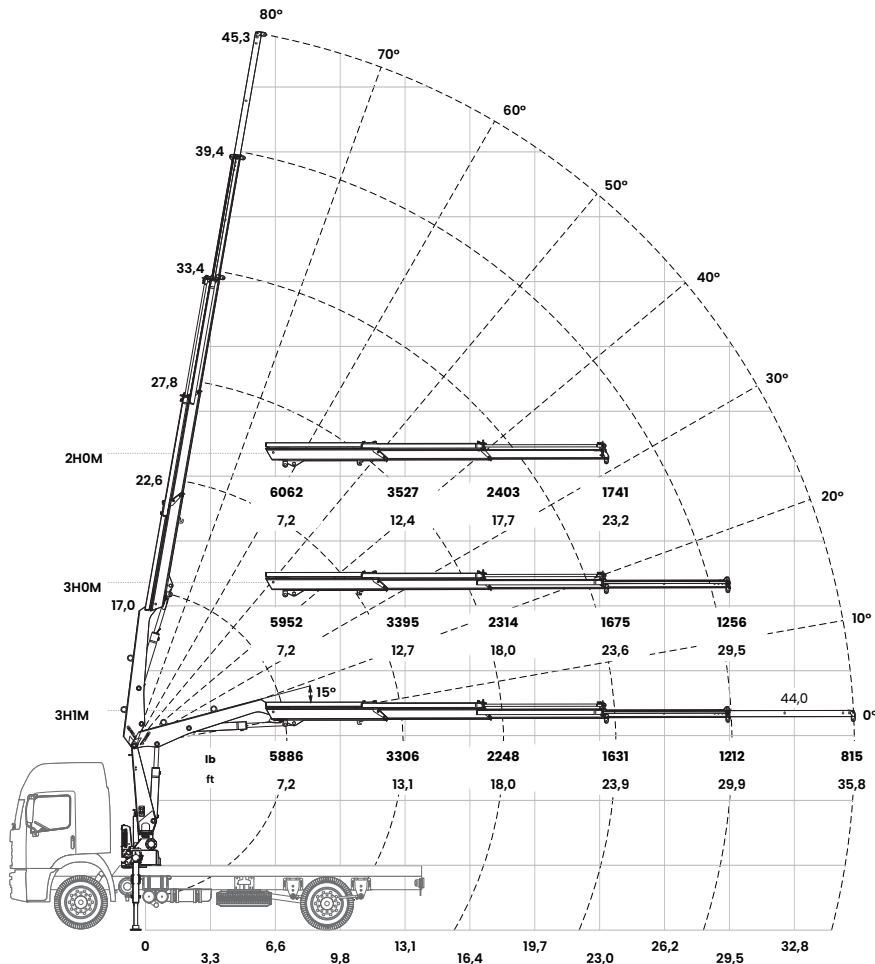

specification

max. manual vertical reach	45,3 ft
max. manual horizontal reach	35,8 ft
max. hydraulic vertical reach	39,4 ft
max. hydraulic horizontal reach	29,9 ft
front stabilizer spread	11,3 ft * / 14,6 ft *
boom elevation angle	80°
slewing angle	400°
slewing torque	9,41 kN.m
max. operating pressure	3980 psi
dead weight - 3HOM / 3HIM	2381 lb / 2425 lb
fitting space required	2,9 ft
oil tank capacity	10,56 gal
min. gross vehicle weight (GVW)	13228 lb**

dimensions

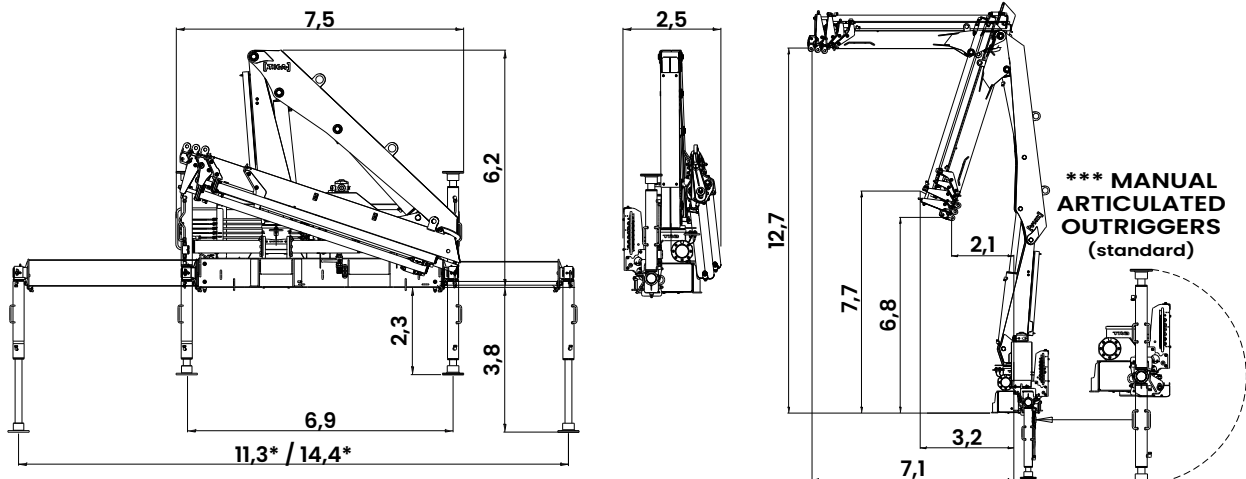

* front hydraulic outriggers spread optional

** through vehicle integration study

*** manual articulated outriggers (standard)

