


[TKA] brazilian boom

80.700


diagram

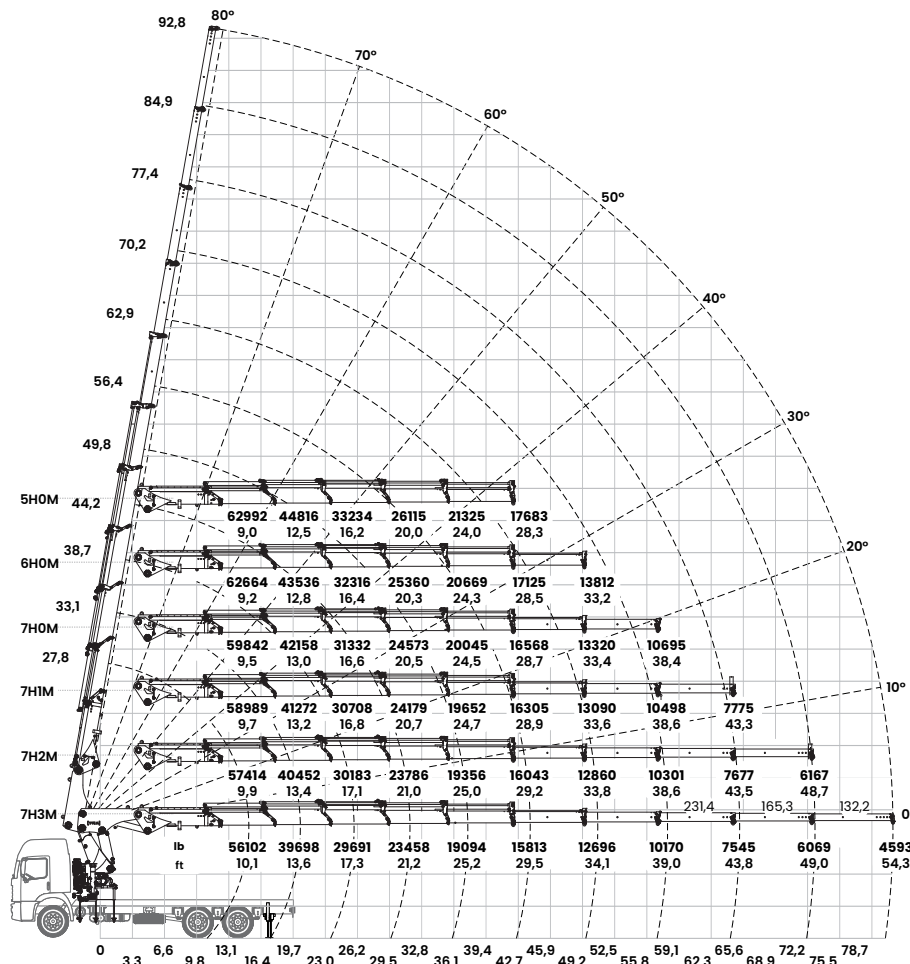

specification

max. manual vertical reach	92,8 ft
max. manual horizontal reach	80,7 ft
max. hydraulic vertical reach	70,2 ft
max. hydraulic horizontal reach	57,7 ft
front stabilizer spread	27,6 ft
boom elevation angle	80°
slewing angle	360°
slewing torque	80,31 kN.m
max. operating pressure	3980 psi
dead weight - 5H0M / 6H0M / 7H0M	14771 lb / 15300 lb / 15785 lb
dead weight - 7H1M / 7H2M / 7H3M	16017 lb / 16182 lb / 16314 lb
fitting space required	5,6 ft
oil tank capacity	46,23 gal
min. gross vehicle weight (GVW)	50706 lb*

dimensions

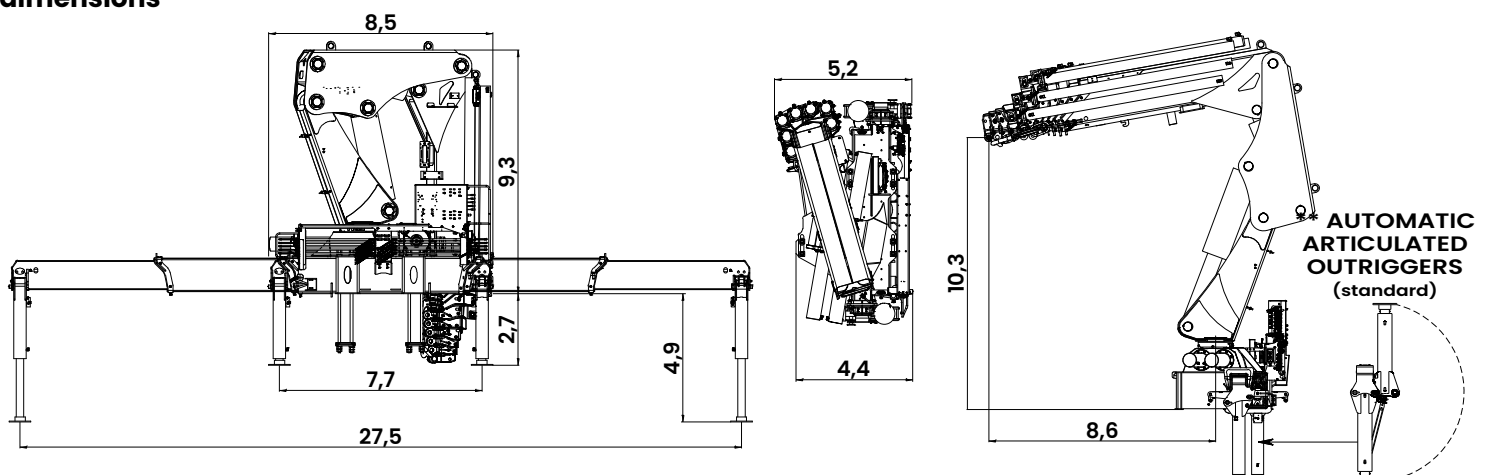

* through vehicle integration study ** automatic articulated outriggers (standard)