


[TKA] brazilian boom

90.900


diagram

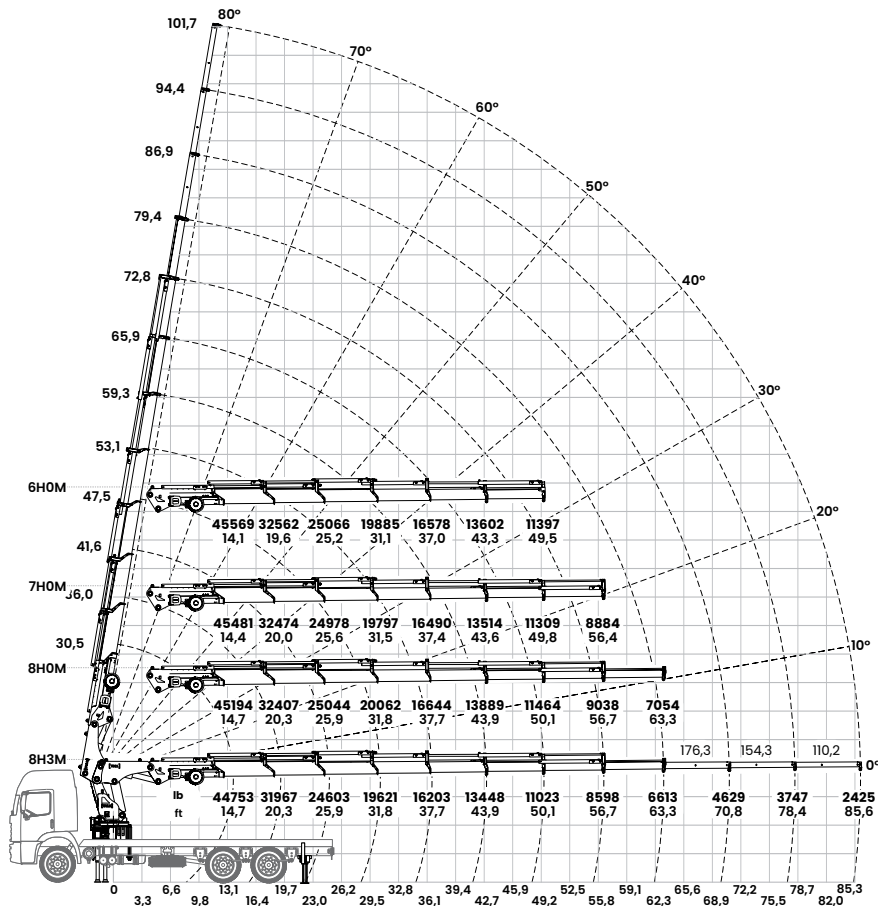

specification

max. manual vertical reach	101,7 ft
max. manual horizontal reach	85,6 ft
max. hydraulic vertical reach	79,3 ft
max. hydraulic horizontal reach	63,3 ft
front stabilizer spread	27,6 ft
boom elevation angle	80°
slewing angle	continuous
slewing torque	137,29 kN.m
max. operating pressure	4351 psi
dead weight - 6H0M / 7H0M / 8H0M	15796 lb / 16402 lb / 16909 lb
dead weight - 8H1M / 8H2M / 8H3M	17085 lb / 17240 lb / 17350 lb
fitting space required	3,9 ft
oil tank capacity	66,04 gal
min. gross vehicle weight (GVW)	59524 lb*

dimensions

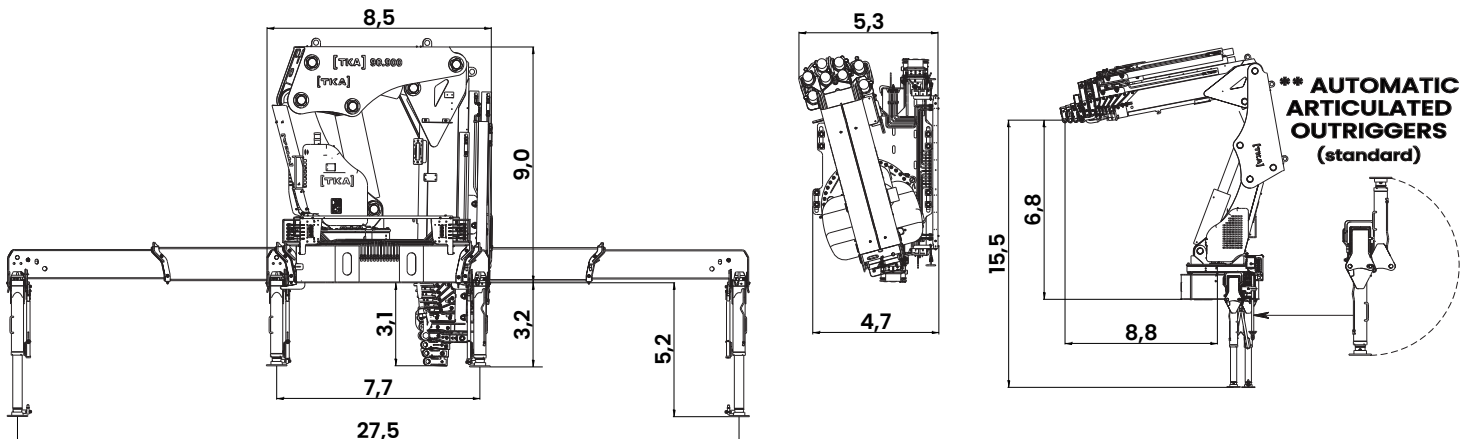

* through vehicle integration study ** automatic articulated outriggers (standard)