




Stage 5 - LOS Tangent-Surface Switching Selection
powered cost + physical virtual edge + heading-state Bellman cost-to-go

A 3D tangent-surface candidates and selected switch

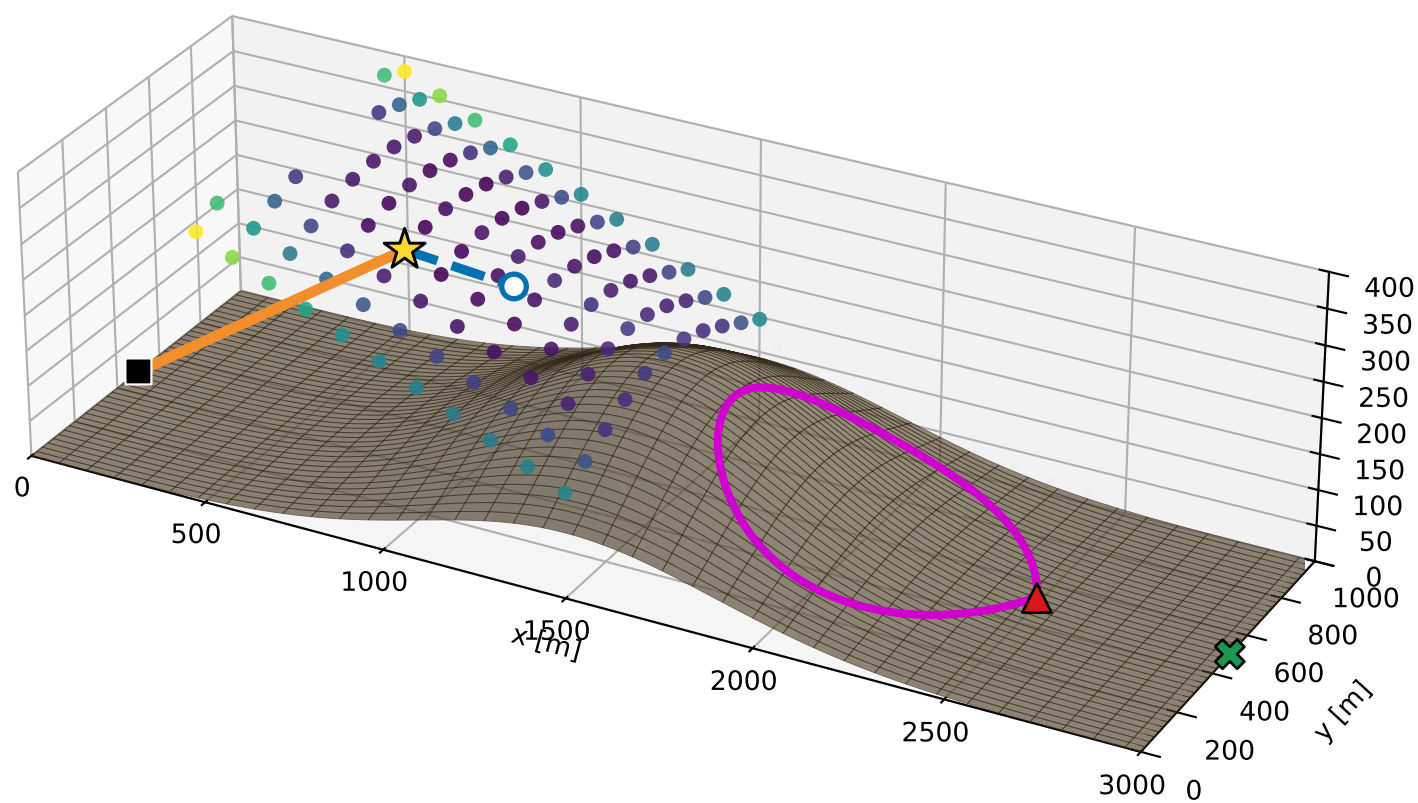

- Launch
- Sensor
- Goal
- Terrain tangent-contact curve
- Powered path (occluded)
- Physical virtual glide edge
- Selected switch
- Bellman entry node

B Plan view: exhaustive sampled-manifold objective

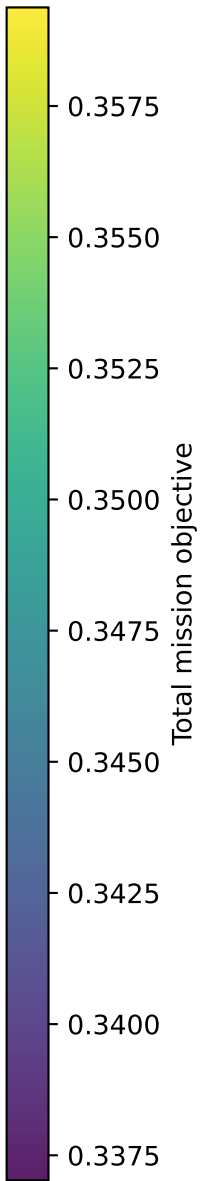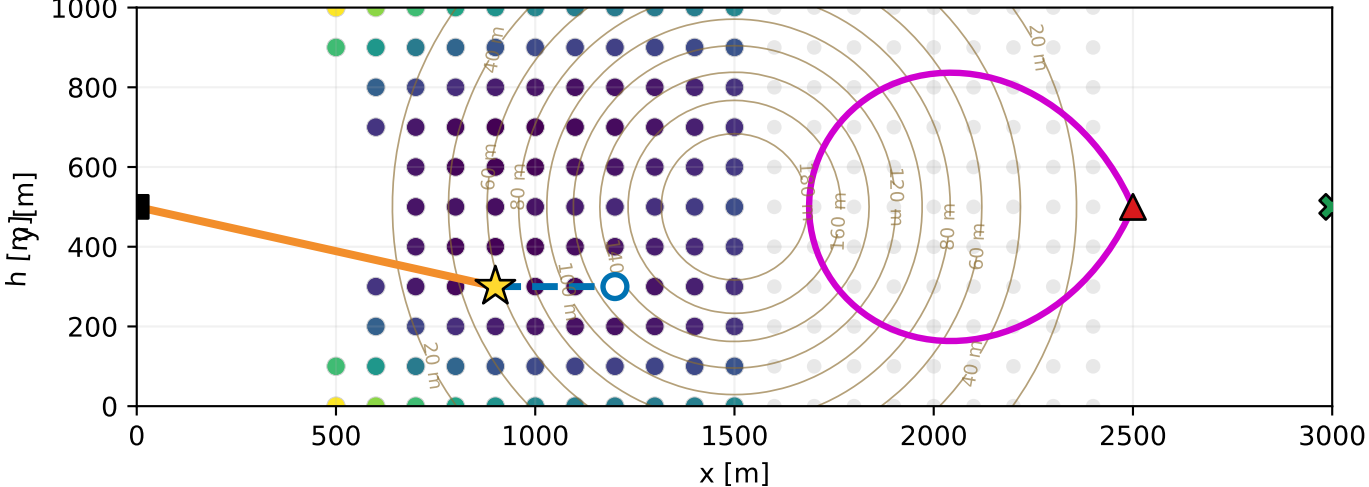

Gray: infeasible/unreachable candidate; two mirror-image minima tie exactly; full glide policy extraction is the next stage