

Select Vehicle | New
TSBs | Technician's Reference

Component Search:

 Conversion Calculator


2002 Mercedes Benz Truck ML 320 (163.154) V6-3.2L (112.942)

[Vehicle Level](#) → [Heating and Air Conditioning](#) → [Air Register](#) → [Service and Repair](#) → [AR68.10-P-1150GH Remove/Install Center Air Nozzle](#) ↵

AR68.10-P-1150GH Remove/Install Center Air Nozzle

[Notes](#)

AR68.10-P-1150GH Remove/Install Center Air Nozzle

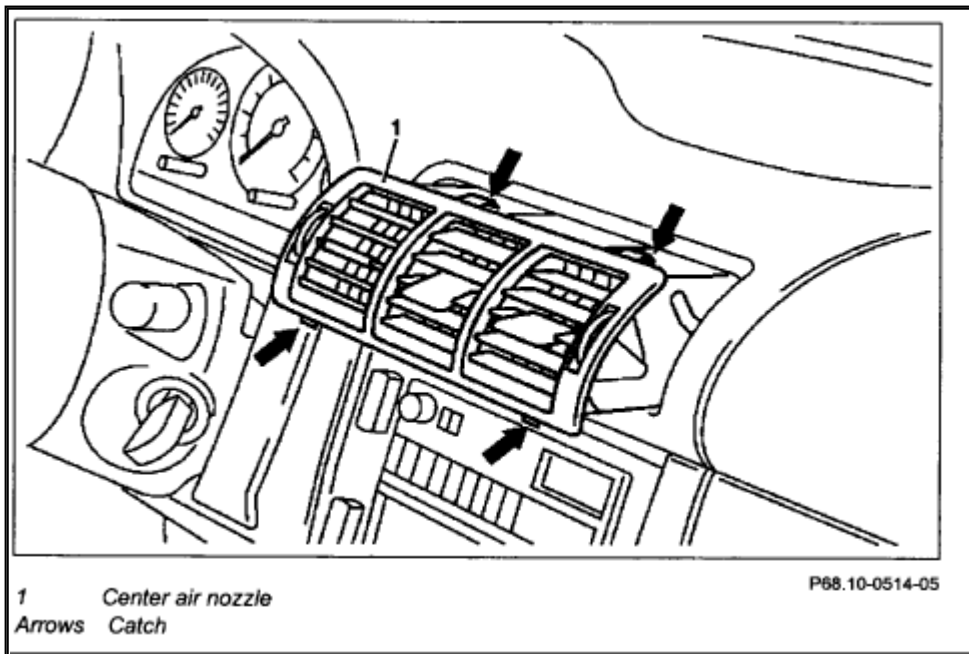

Remove/Install

- 1 Pry center air nozzle (1) at bottom out of catch (arrows)

NOTE: Installation: air nozzle should catch audibly.

- Long wedge: See **Special Tools** below.

2 Pry center air nozzle (1) at top out of catch (arrows)


NOTE: Installation: air nozzle should catch audibly.

- Long wedge: See **Special Tools** below.

3 Pull center air nozzle (1) out of air duct

4 Install in the reverse order

Special Tools

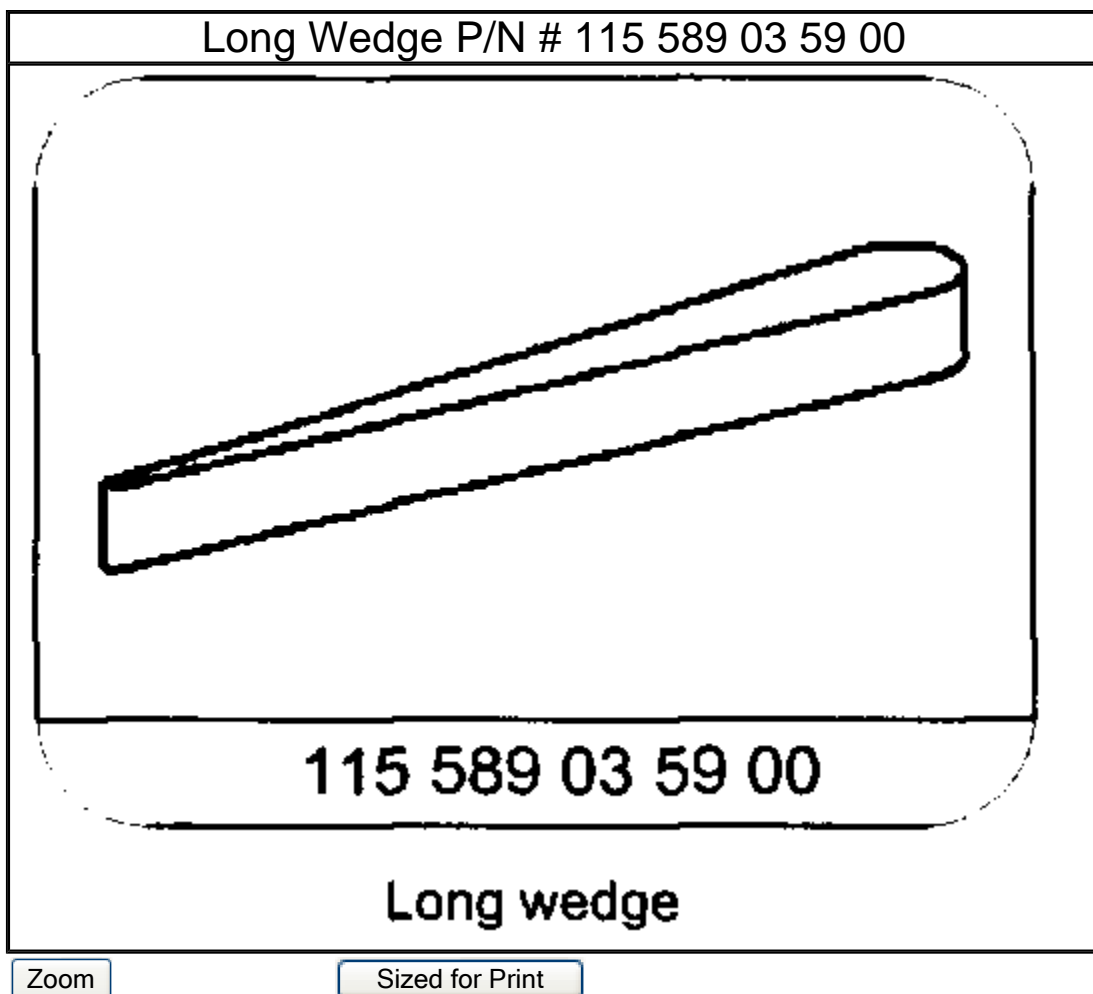

© 2009 ALLDATA LLC. All rights reserved.

[Terms of Use](#)