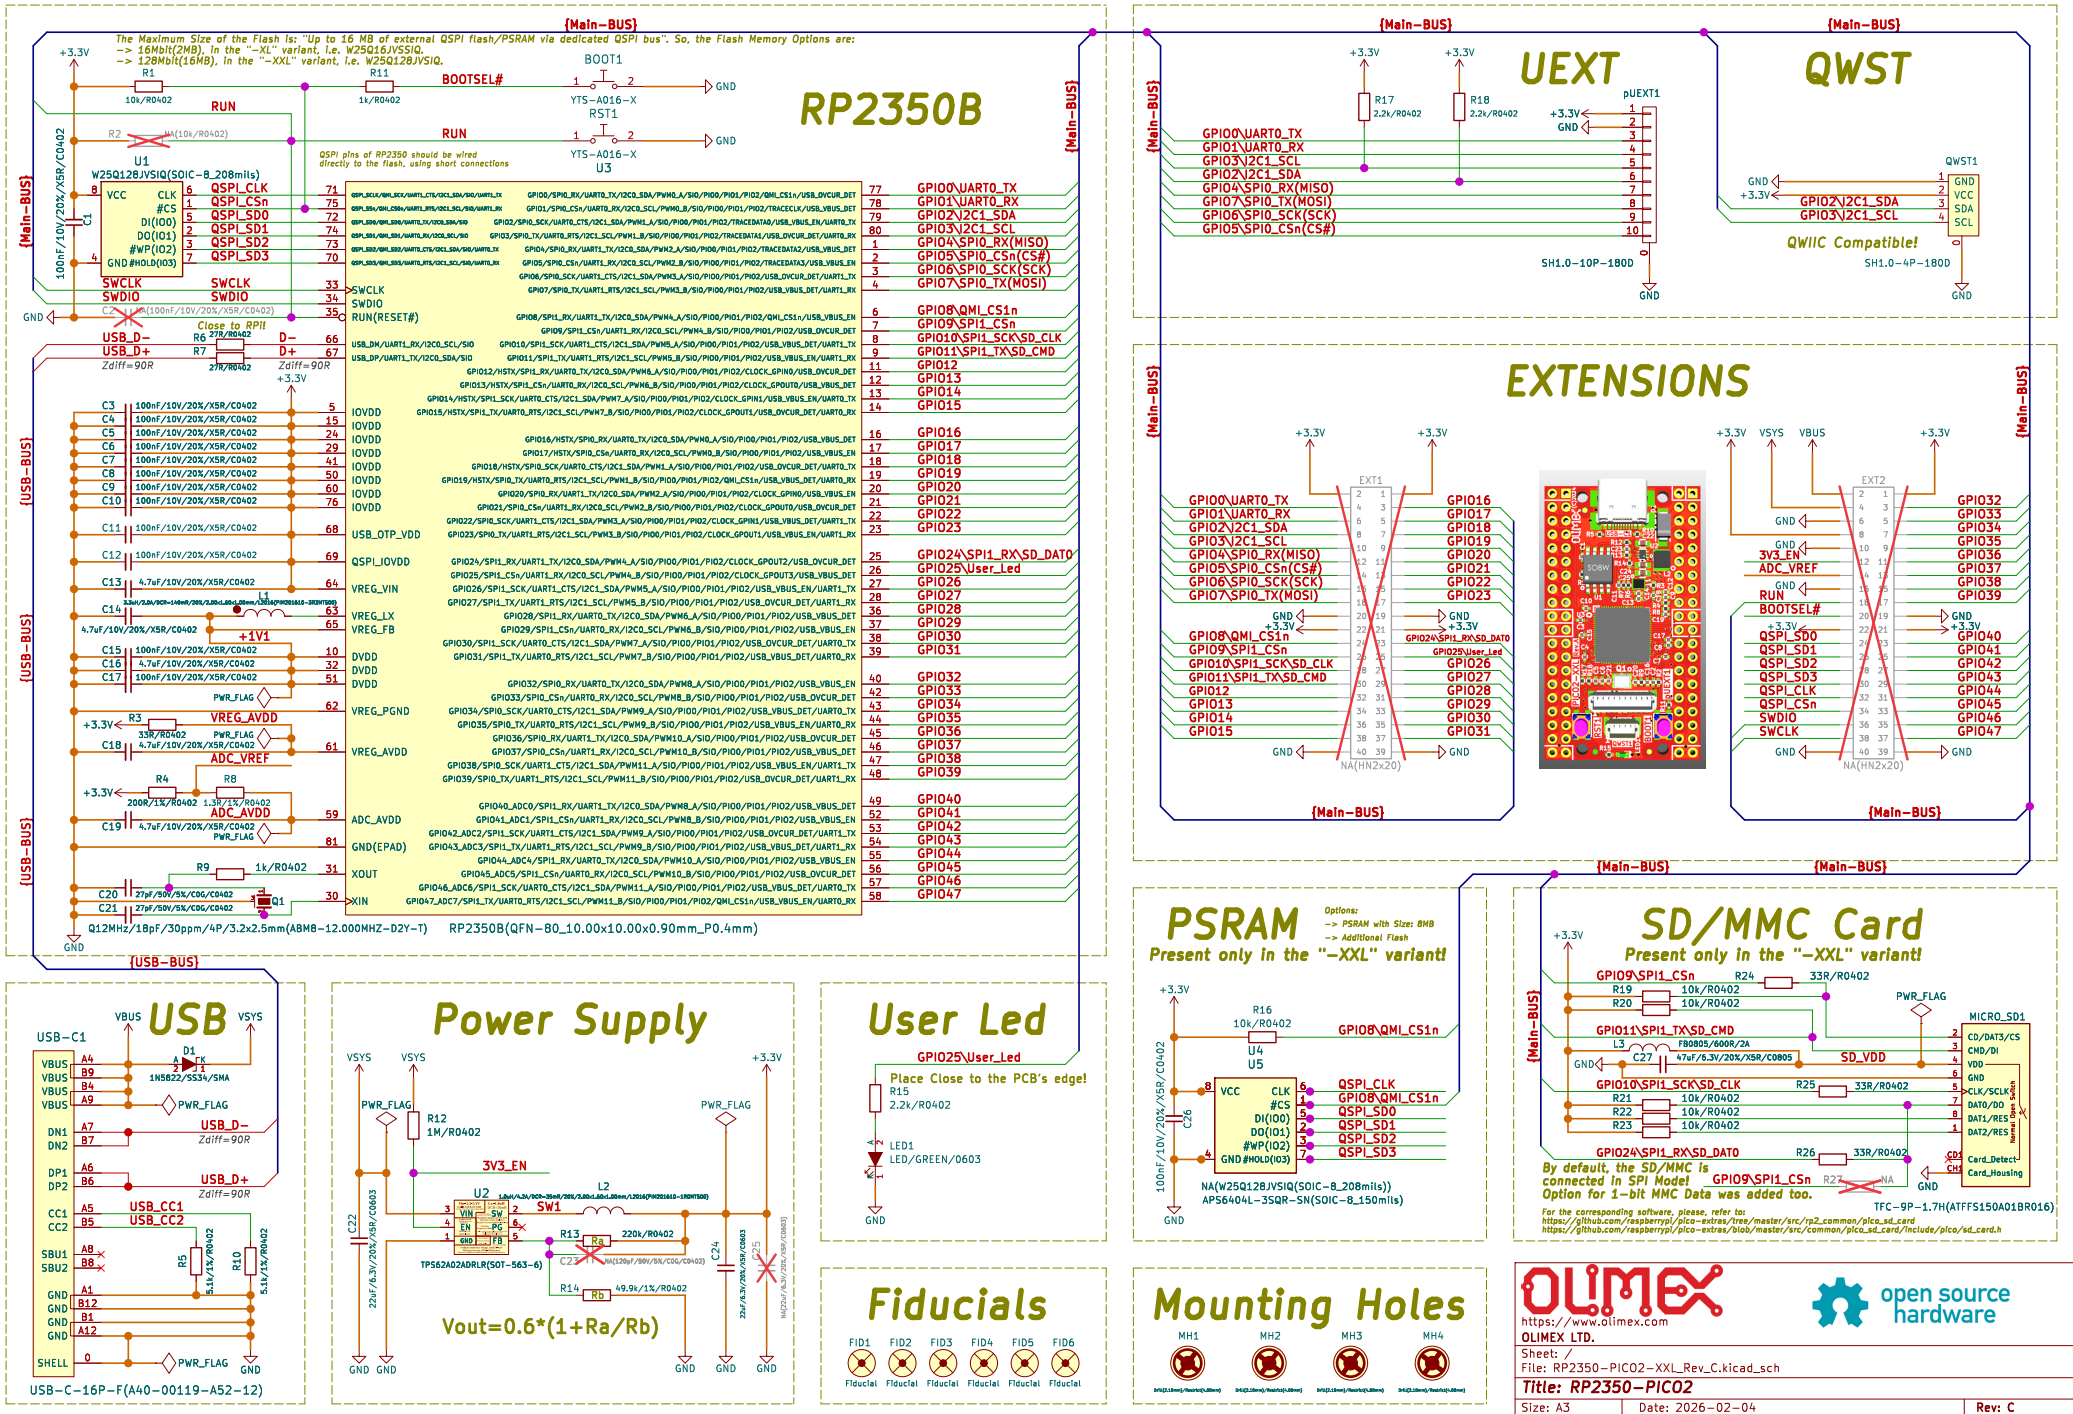
RP2350B
The Maximum Size of the Flash is: "Up to 16 MB of external QSPI flash/PSRAM via dedicated QSPI bus". So, the Flash Memory Options are:
-> 16Mbit(2MB). In the "-XL" variant, i.e. W25Q16JVSSIQ.
-> 128Mbit(16MB). In the "-XXL" variant, i.e. W25Q128JVSIQ.
QSPI pins of RP2350 should be wired directly to the flash, using short connections
Close to RP!!
Q12MHz/18pF/30ppm/4P/3.2x2.5mm(ABM8-12.000MHZ-D2Y-T)
RP2350B(QFN-80_10.00x10.00x0.90mm_P0.4mm)
UEXT
QWST
QWIIC Compatible!
EXTENSIONS
PSRAM
Present only in the "-XXL" variant!
SD/MMC Card
Present only in the "-XXL" variant!
By default, the SD/MMC is connected in SPI Mode! Option for 1-bit MMC Data was added too.
USB
USB-C-16P-F(A40-00119-A52-12)
Power Supply
Vout=0.6*(1+Ra/Rb)
User Led
Place Close to the PCB's edge!
Fiducials
Mounting Holes
OLIMEX
https://www.olimex.com
OLIMEX LTD.
open source hardware
Sheet: /
File: RP2350-PICO2-XXL_Rev_C.kicad_sch
Title: RP2350-PICO2
Size: A3
Date: 2026-02-04
Rev: C
KiCad E.D.A. kicad 7.0.11-7.0.11-ubuntu22.04.1
Id: 1/1