
Medtronic

NC Euphora™
noncompliant balloon dilatation catheter

Technical specifications

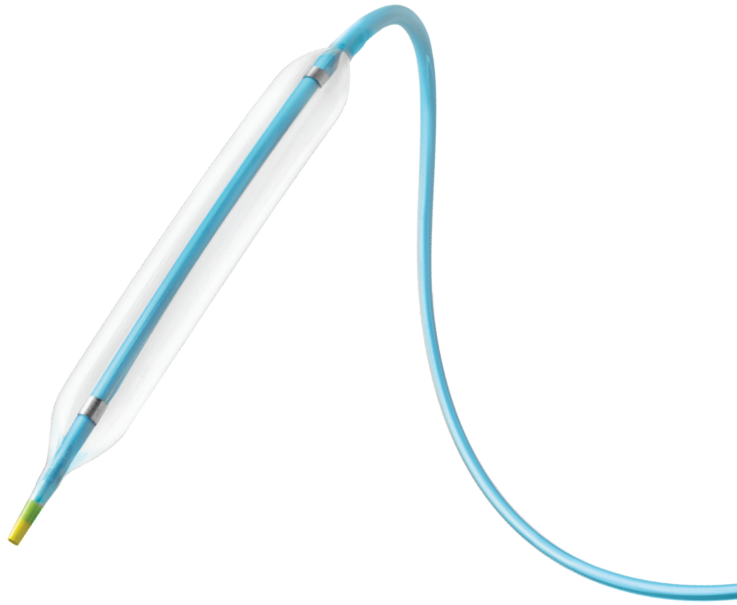

Overview

NC Euphora noncompliant balloon dilatation catheter complements your expertise and provides uncompromising performance in the moment you need it most.[1-3] It features improved pushability and trackability for superior deliverability,[4] high rated burst pressure (RBP) up to 20 atm,[5] a low growth profile for superb precision,[1] and excellent recross[6] and durability[7] for reliable performance in long, difficult cases.[6, 7]

Design rationale

Each element of NC Euphora balloon was deliberately designed for unsurpassed performance. From materials to design to packaging, every balloon component was developed to enhance usability and outperform leading competitors.[1,3]

Features and benefits

Excellent recross[6]
Low lesion entry profile (0.015 in) improves tracking through challenging lesions with low likelihood of catching[6] when crossing a deployed stent and excellent recross[6]

Platinum iridium marker bands enhance visibility[3]

Low growth profile and durability
Stronger, durable, and flexible LIGHT™ (low inflation growth, high track) balloon material[3] provides high-pressure capability,[7] a superior growth profile,[6] and excellent recross[6] (reinflates to RBP up to 20 times without bursting)[5]

Superior deliverability[6]
PowerTrac™ technology enables superior deliverability[6]

Expanded size matrix[3]

Balloon diameter (mm)	Balloon length (mm)					
	06	08	12	15	20	27
2.00	NCEUP2006X	NCEUP2008X	NCEUP2012X	NCEUP2015X	NCEUP2020X	–
2.25	NCEUP22506X	NCEUP22508X	NCEUP22512X	NCEUP22515X	NCEUP22520X	–
2.50	NCEUP2506X	NCEUP2508X	NCEUP2512X	NCEUP2515X	NCEUP2520X	NCEUP2527X
2.75	NCEUP27506X	NCEUP27508X	NCEUP27512X	NCEUP27515X	NCEUP27520X	NCEUP27527X
3.00	NCEUP3006X	NCEUP3008X	NCEUP3012X	NCEUP3015X	NCEUP3020X	NCEUP3027X
3.25	NCEUP32506X	NCEUP32508X	NCEUP32512X	NCEUP32515X	NCEUP32520X	NCEUP32527X
3.50	NCEUP3506X	NCEUP3508X	NCEUP3512X	NCEUP3515X	NCEUP3520X	NCEUP3527X
3.75	NCEUP37506X	NCEUP37508X	NCEUP37512X	NCEUP37515X	NCEUP37520X	NCEUP37527X
4.00	NCEUP4006X	NCEUP4008X	NCEUP4012X	NCEUP4015X	NCEUP4020X	NCEUP4027X
4.50	–	NCEUP4508X	NCEUP4512X	NCEUP4515X	NCEUP4520X	–
5.00	–	NCEUP5008X	NCEUP5012X	NCEUP5015X	–	–

Compliance data[8]

Pressure (atm)	Average balloon diameter (mm)										
	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.50	5.00
6	1.89	2.12	2.35	2.54	2.77	2.94	3.13	3.43	3.67	4.09	4.64
7	1.91	2.15	2.37	2.57	2.80	2.97	3.17	3.47	3.72	4.14	4.71
8	1.93	2.17	2.40	2.60	2.84	3.01	3.22	3.51	3.78	4.19	4.79
9	1.95	2.19	2.43	2.63	2.87	3.06	3.27	3.56	3.84	4.25	4.86
10	1.97	2.21	2.46	2.66	2.91	3.10	3.32	3.61	3.90	4.31	4.92
11	1.98	2.23	2.48	2.69	2.94	3.14	3.37	3.66	3.95	4.37	4.95
1216 (12)	1.99	2.25	2.50	2.71	2.97	3.18	3.41	3.70	3.99	4.42	5.00
13	2.00	2.26	2.51	2.73	2.99	3.21	3.44	3.73	4.03	4.47	5.04
14	2.02	2.28	2.53	2.75	3.01	3.23	3.47	3.76	4.07	4.51	5.08
15	2.03	2.29	2.54	2.77	3.03	3.26	3.50	3.78	4.10	4.54	5.12
16	2.04	2.30	2.56	2.78	3.05	3.28	3.52	3.81	4.13	4.58	5.15
17	2.05	2.31	2.58	2.80	3.07	3.30	3.55	3.83	4.15	4.60	5.19
18	2.06	2.33	2.59	2.81	3.09	3.33	3.57	3.86	4.18	4.63	5.23
19	2.07	2.34	2.61	2.83	3.11	3.35	3.59	3.88	4.21	4.66	5.27
20	2.09	2.36	2.63	2.84	3.13	3.37	3.62	3.91	4.24	4.69	5.30
21	2.10	2.37	2.65	2.86	3.15	3.39	3.64	3.93	4.28	4.72	5.35
22	2.12	2.39	2.66	2.88	3.17	3.41	3.66	3.96	4.31	4.75	5.39
23	2.14	2.40	2.68	2.90	3.20	3.43	3.69	3.99	4.34	4.78	–
24	2.15	2.42	2.71	2.92	3.22	–	3.71	–	–	4.81	–
25	–	2.44	–	2.94	3.25	–	3.74	–	–	4.84	–

Nominal pressure | Rated burst pressure†

Nominal pressure: the pressure at which the balloon reaches its labeled diameter
Rated burst pressure: the maximum pressure to which a balloon is designed to be inflated

† Rated burst pressure – do not exceed.

Technical specifications[8]

Technical feature	NC Euphora balloon
Nominal pressure (atm)	12
Rated burst pressure (RBP) (atm)	20
Fatigue capability (cycles to RBP)[7]	20
Catheter distal O.D. (F) 2.00 mm–3.75 mm 4.00 mm–5.00 mm	 Straight 2.5 Straight 2.7
Marker band material	Platinum iridium
Lesion entry profile (in)[6]	0.015
Balloon material	LIGHT™ (Low Inflation Growth, High Track)
Hydrophilic coating	Selective Dura-Trac
Catheter length (cm)	142 cm
Balloon MiniWrap 2.00 mm–3.75 mm 4.00 mm–5.00 mm	 3 folds 5 folds
MGCID for 2.00–4.00 mm balloon	1.42 mm/0.056"
MGCID for 4.50–5.00 mm balloon	1.68 mm/0.066"

1. Based on competitive testing report 10121590DOC, NC Euphora 2.00x6.00mm, 3.00x20mm and 4.00x20mm versus NC Trek and NC Quantum Apex 2.00x6mm, 3.00x20mm and 4.00x20mm. July 2014.
2. Based on customer needs for next generation POBA, 10034114DOC. November 2011.
3. Based on design freeze document 10099512DOC, NC Euphora. June 2013.
4. Based on competitve testing report 10121590DOC, NC Euphora 3.00x20mm versus NC Sprinter 3.00x20mm. April 2015.
5. Based on IFU M333846D001 Rev 1A, NC Euphora. 2014.
6. Based on competitive testing report 10121590DOC, NC Euphora 3.00x20mm versus NC Trek and NC Quantum Apex 3.00x20mm. April 2015.
7. Based on design verification report 10135763DOC, NC Euphora. April 2014.
8. Based on product label technical information 10124625DOC, NC Euphora RX. June 2017.

Bench test data may not be indicative of clinical performance.

Medtronic

Medtronic
Tel: 707.525.0111

LifeLine Customer Support
Tel: 877.526.7890

Product Services
Tel: 888.283.7868

medtronic.com

UC201704032 IE ©2025 Medtronic. Medtronic, Medtronic logo, and Engineering the extraordinary are trademarks of Medtronic. All other brands are trademarks of a Medtronic company. For distribution where NC Euphora is available.

Important information: Prior to use, refer to the product Instructions for Use supplied with these devices for indications, contraindications, side effects, suggested procedure, warnings and precautions.

Caution: Federal (USA) law restricts these devices to sale by or on the order of a licensed healthcare practitioner. See package inserts for full product information.