


WOODY CONTROLLER BODY | OAK BOTTOM | rev A | 1 per instrument | 6 mm oak

Oak bottom - plan, seen from above (inside face up, outside face away); dashed = cut from the outside face

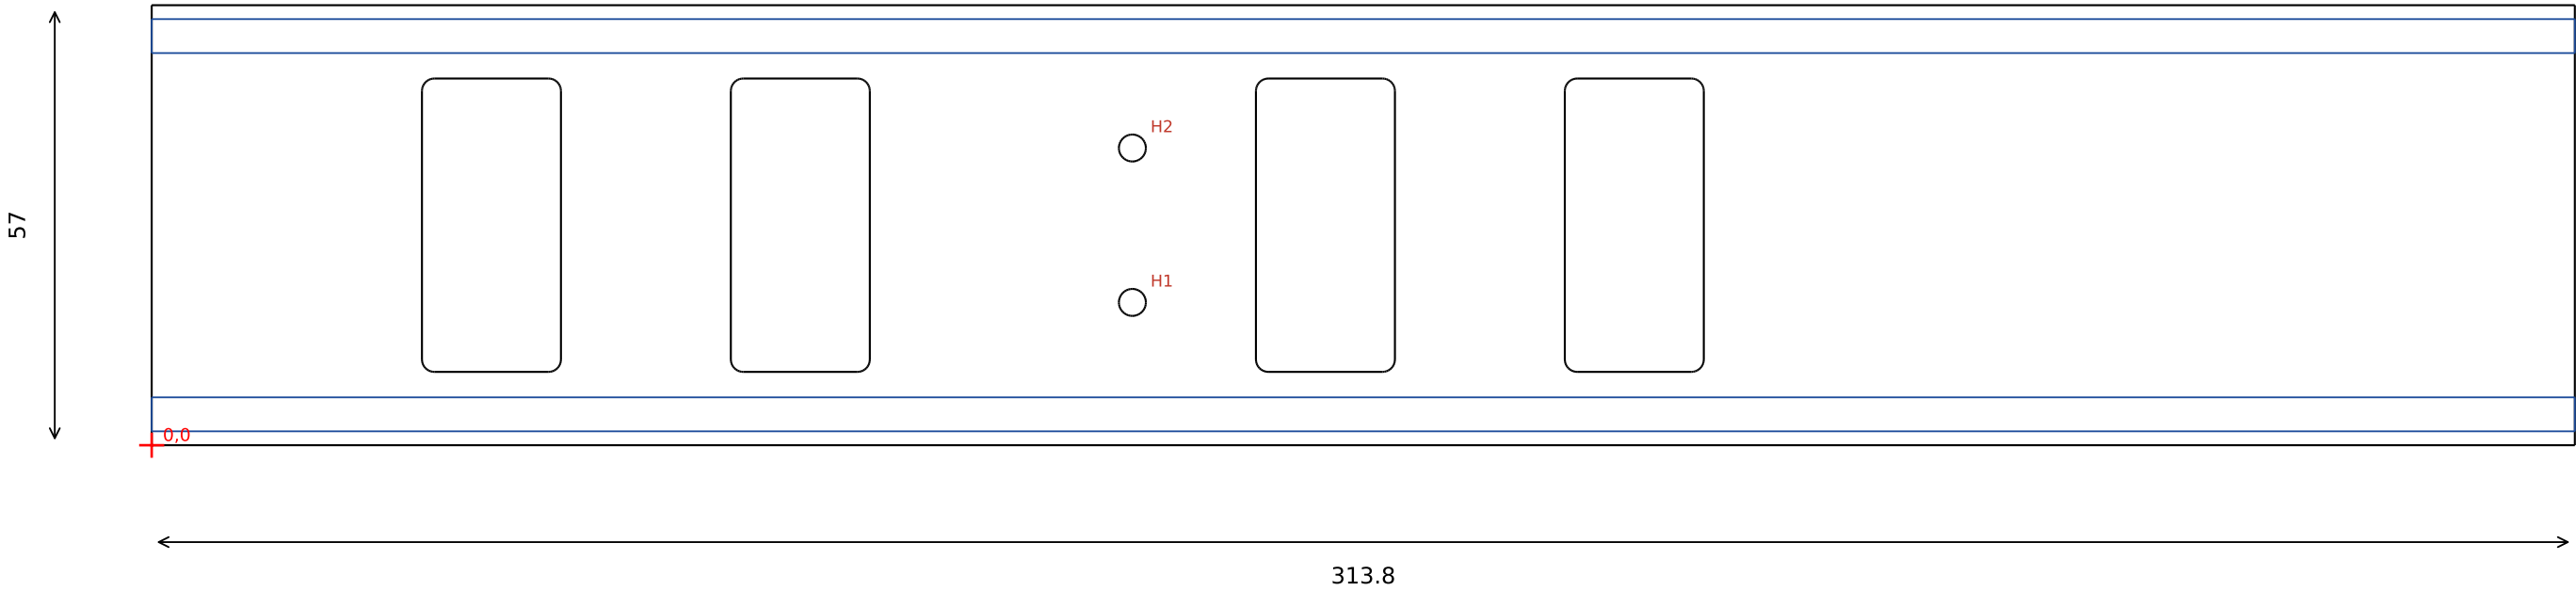

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	U-bolt leg	127	18.5	3.5	through	MECH-UBOLT: U-bolt + 2 nylocs (size: config/body.yaml hardwa
H2	U-bolt leg	127	38.5	3.5	through	MECH-UBOLT: U-bolt + 2 nylocs (size: config/body.yaml hardwa

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, thumb recesses, U-bolt holes	oak-bottom.dxf
inside face	3	side grooves	oak-bottom-grooves.dxf

NOTES

- MATERIAL: hardwood, the owner's choice (the parts are named oak) - status tbd (config/body.yaml fabrication.wood_species)
- STOCK THICKNESS: 6, finished (fab-geometry.echo; the flush rule: switch.keycap_top_above_seat - switch.total_travel)
- FINISH: stained a very dark ebony, the grain still showing, under a satin oil finish (fabrication.wood_finish)
- TOL: profile +/-0.2, depths +/-0.1 (fabrication.wood*_tol); holes for hardware to the hardware's own fit, below
- COUNTERSINKS: none. Pockets and counterbores are flat-bottomed
- EDGES: the model's sanded roundover, stack.edge_r = 1.5 (tbd), is in the STEP; it may be left for sanding by hand
- QTY PER INSTRUMENT: 1 | BOM BODY-OAK: TBD (candidate)

OPEN FIGURES this part depends on: 17 tbd, so blocking, of 27 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap_clear, stack.cap_holes, stack.side_inset, stack.groove_depth, stack.groove_clear, ends.mouth_cap_t, ends.tail_cap_t, layout.mouth_extra, layout.tail_clear, layout.underside_clear, boards.sensor_lead_row, boards.umb_adapter_t, boards.board_clear, hardware.ubolt_rod_d, hardware.ubolt_hole_clear, hardware.ubolt_span, fabrication.wood_species