


WOODY CONTROLLER BODY | MATRIX WINDOW | rev A | 1 per instrument | 3 mm acrylic

Matrix window - plan, seen from above, top face up; X along the body, Y across

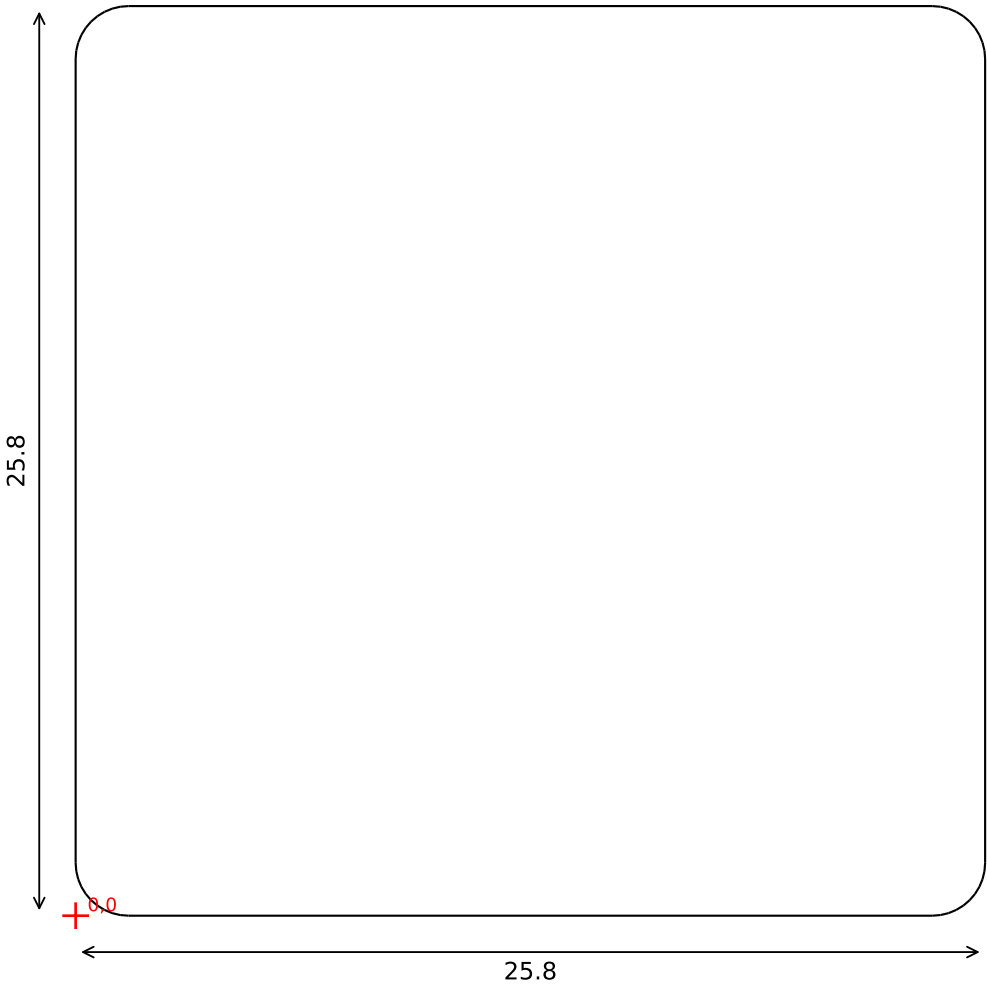

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

| face | depth   | what                             | file (in this folder) |
|------|---------|----------------------------------|-----------------------|
| -    | through | outline, in the oak top's rebate | matrix-window.dxf     |

NOTES

- MATERIAL: acrylic (PMMA) sheet (nominal), 3 thick (openings.matrix\_acrylic\_t, tbd)
- TINT: colourless (tbd, fabrication.window\_tint)
- SURFACE: frosted, on the top face (fabrication.window\_surface, window\_frosted\_face: tbd)
- EDGES: as laser cut (fabrication.acrylic\_edge)
- TOL: profile +/-0.1 (fabrication.acrylic\_profile\_tol)
- HOLES: none. One closed outline, cut through
- FIT: drops into the oak top's rebate, flush with its playing face (oak-top-rebate.dxf in the oak folder): its thickness is the rebate's depth
- QTY PER INSTRUMENT: 1 | BOM MECH-WINDOW: Frosted acrylic window (open)

OPEN FIGURES this part depends on: 14 tbd, so blocking, of 22 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap\_clear, stack.side\_inset, ends.mouth\_cap\_t, ends.tail\_cap\_t, layout.mouth\_extra, layout.tail\_clear, layout.underside\_clear, boards.sensor\_lead\_row, boards.umb\_adapter\_t, boards.board\_clear, openings.matrix\_lip, openings.matrix\_acrylic\_t, fabrication.window\_tint, fabrication.window\_frosted\_face