


WOODY CONTROLLER BODY | MOUTH CAP | rev A | 1 per instrument | 6 mm oak

Mouth cap - plan, seen from outside the body; X across the body, Y up

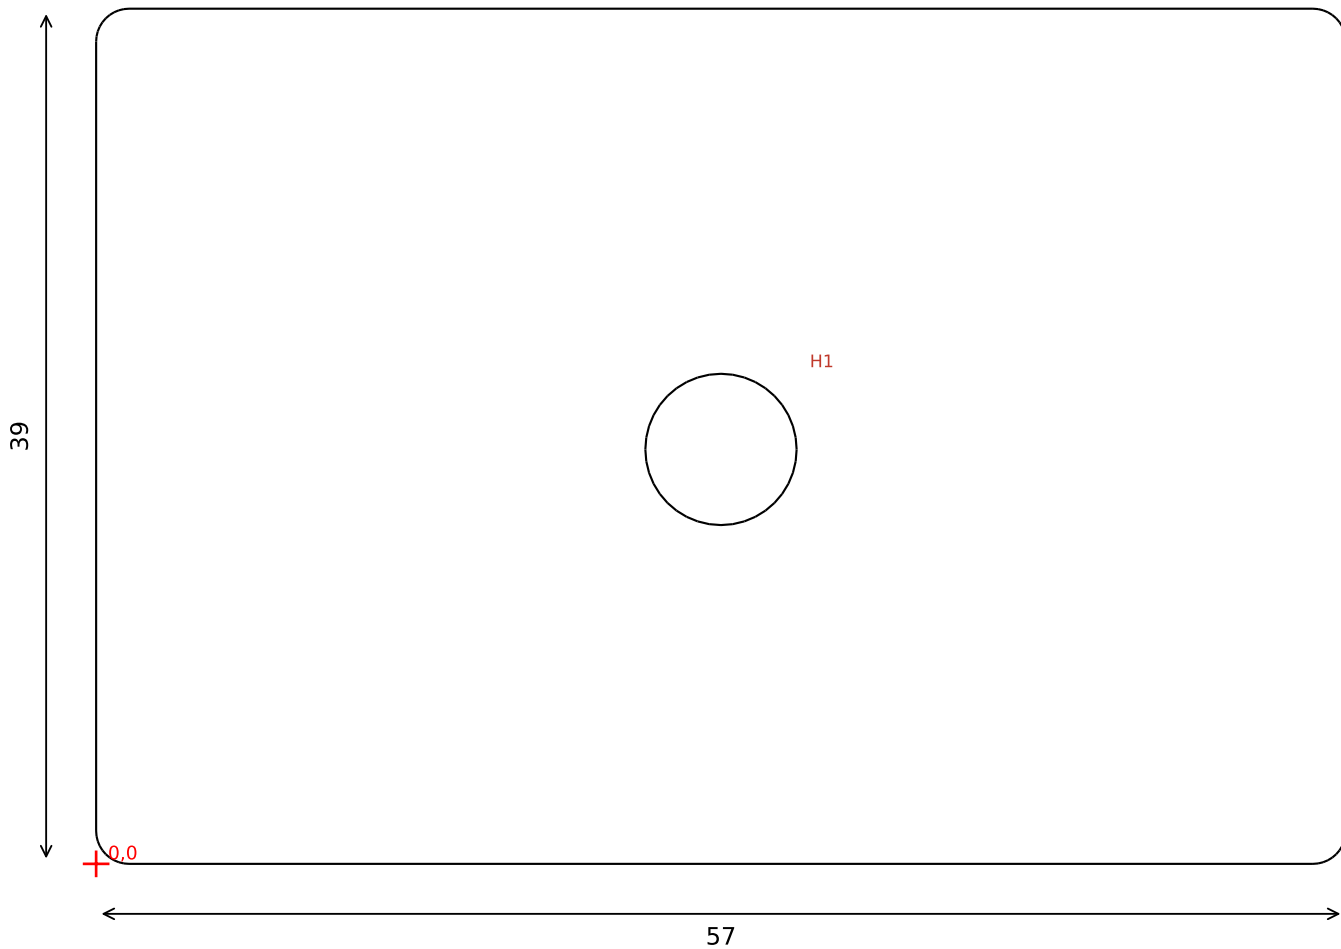

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	breath inlet insert, tap drill	28.5	18.9	6.9	through	INLET-INSERT: E-Z LOK 550-1032

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, breath inlet tap drill	mouth-cap.dxf

NOTES

- MATERIAL: hardwood, the owner's choice (the parts are named oak) - status tbd (config/body.yaml fabrication.wood_species)
- STOCK THICKNESS: 6, finished (fab-geometry.echo; ends.mouth_cap_t)
- FINISH: stained a very dark ebony, the grain still showing, under a satin oil finish (fabrication.wood_finish)
- TOL: profile +/-0.2, depths +/-0.1 (fabrication.wood_*_tol); holes for hardware to the hardware's own fit, below
- THREADED INSERTS H1: 1 x E-Z LOK 550-1032 (E-Z LOK, BOM INLET-INSERT) - Breath inlet insert: #10-32 inside, M8x1.25 outside, through the oak mouth cap
- TAP the inlet hole to the insert's outside thread (BOM INLET-INSERT), square to the face, before the insert is epoxied in flush with the outer face
- COUNTERSINKS: none. Pockets and counterbores are flat-bottomed
- EDGES: the model's sanded roundover, stack.edge_r = 1.5 (tbd), is in the STEP; it may be left for sanding by hand
- QTY PER INSTRUMENT: 1 | BOM ENDCAP-MOUTH: TBD - oak, same stock as BODY-OAK (open)

OPEN FIGURES this part depends on: 2 tbd, so blocking, of 6 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

ends.mouth_cap_t, fabrication.wood_species