


WOODY CONTROLLER BODY | OAK TOP | rev A | 1 per instrument | 6 mm oak

Oak top - plan, seen from above (playing face up); dashed = cut from the underside

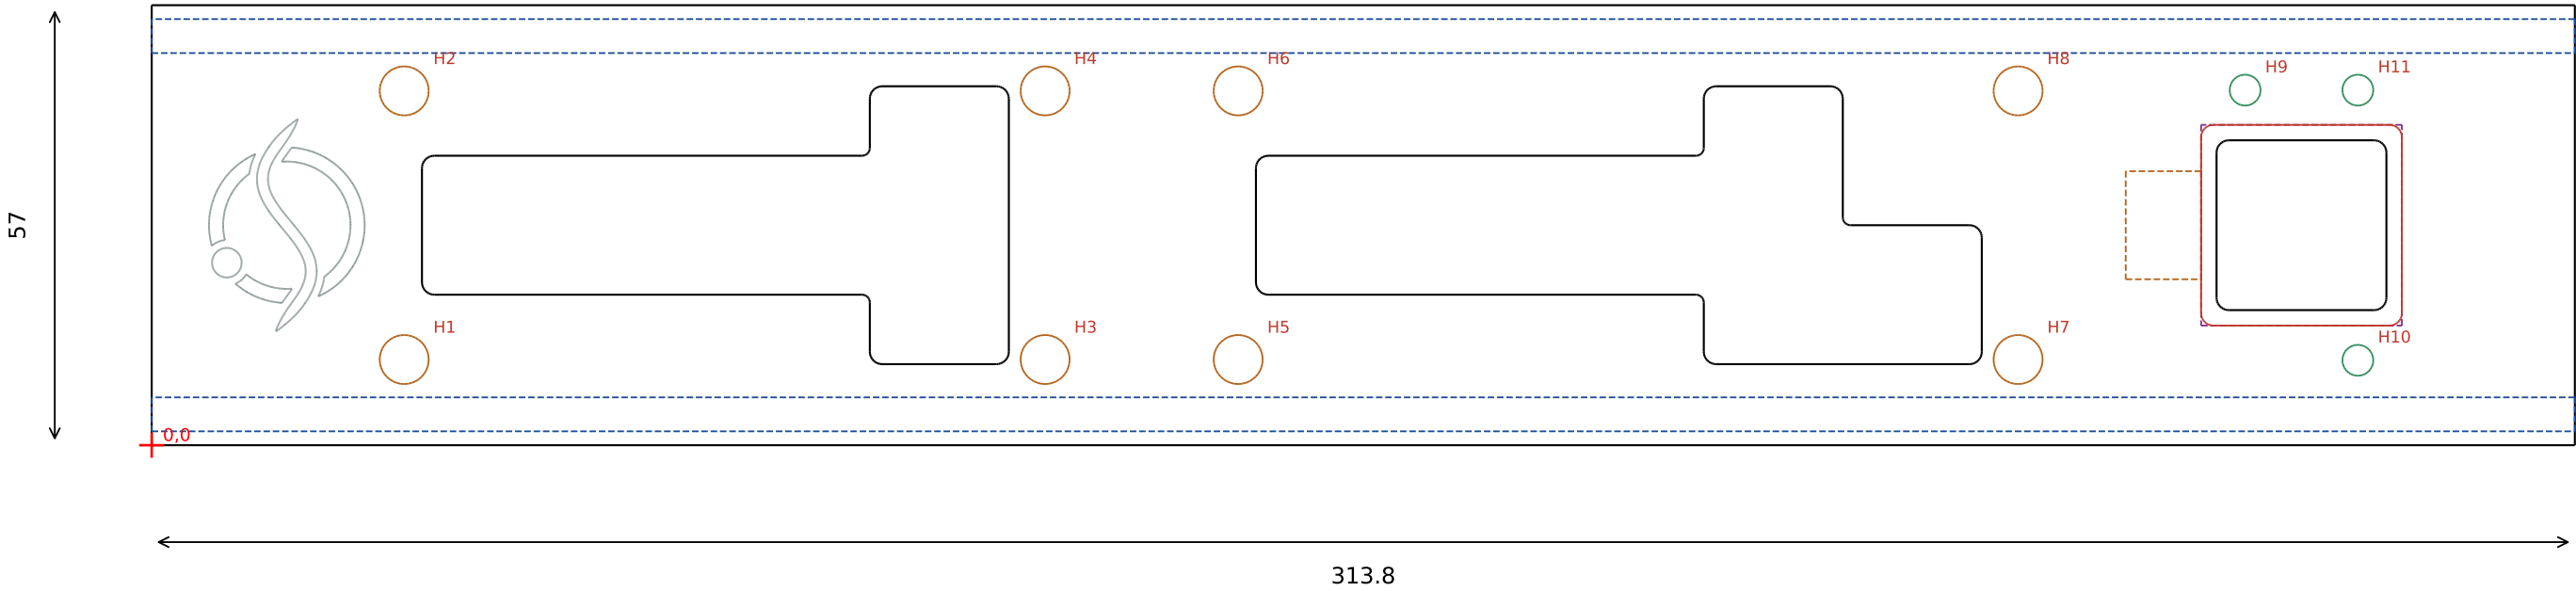

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	column screw head pocket	32.7	11.1	6.35	2 from underside	
H2	column screw head pocket	32.7	45.9	6.35	2 from underside	
H3	column screw head pocket	115.7	11.1	6.35	2 from underside	
H4	column screw head pocket	115.7	45.9	6.35	2 from underside	
H5	column screw head pocket	140.7	11.1	6.35	2 from underside	
H6	column screw head pocket	140.7	45.9	6.35	2 from underside	
H7	column screw head pocket	241.7	11.1	6.35	2 from underside	
H8	column screw head pocket	241.7	45.9	6.35	2 from underside	
H9	threaded insert hole	271.1	46	4	4 from underside	MECH-MX-INSERT: CNC Kitchen M2.5 x 4.0 brass threaded insert
H10	threaded insert hole	285.7	11	4	4 from underside	MECH-MX-INSERT: CNC Kitchen M2.5 x 4.0 brass threaded insert
H11	threaded insert hole	285.7	46	4	4 from underside	MECH-MX-INSERT: CNC Kitchen M2.5 x 4.0 brass threaded insert

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, cap slots, matrix window	oak-top.dxf
underside	3	side grooves	oak-top-grooves.dxf
underside	2	column screw head pockets and the recovery USB-C pocket	oak-top-pockets.dxf
underside	4	Matrix carrier insert holes	oak-top-inserts.dxf
underside	0.6	relief over the Matrix	oak-top-relief.dxf
playing face	3	matrix window rebate	oak-top-rebate.dxf
playing face	1	maker's mark etch, filled: epoxy	oak-top-logo.dxf

NOTES

- MATERIAL: hardwood, the owner's choice (the parts are named oak) - status tbd (config/body.yaml fabrication.wood_species)
- STOCK THICKNESS: 6, finished (fab-geometry.echo; the flush rule: switch.keycap_top_above_seat - switch.total_travel)
- FINISH: stained a very dark ebony, the grain still showing, under a satin oil finish (fabrication.wood_finish)
- TOL: profile +/-0.2, depths +/-0.1 (fabrication.wood_*_tol); holes for hardware to the hardware's own fit, below
- THREADED INSERTS H9, H10, H11: 3 x CNC Kitchen M2.5 x 4.0 brass threaded insert (CNC Kitchen, BOM MECH-MX-INSERT) - Set in the oak top's underside at each of the Matrix carrier's three mounts; the carrier's screw threads into it
- COUNTERSINKS: none. Pockets and counterbores are flat-bottomed
- EDGES: the model's sanded roundover, stack.edge_r = 1.5 (tbd), is in the STEP; it may be left for sanding by hand
- QTY PER INSTRUMENT: 1 | BOM BODY-OAK: TBD (candidate)

OPEN FIGURES this part depends on: 23 tbd, so blocking, of 47 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap_clear, stack.cap_holes, stack.side_inset, stack.groove_depth, stack.groove_clear, ends.mouth_cap_t, ends.tail_cap_t, layout.mouth_extra, layout.tail_clear, layout.underside_clear, boards.sensor_lead_row, boards.umb_adapter_t, boards.kb_end_margin, boards.board_clear, openings.matrix_lip, openings.matrix_acrylic_t, openings.usb_plug_l, openings.matrix_usb_to_tail, openings.usb_ext_overmold_w, openings.usb_overmold, hardware.col_screw_head_h, hardware.kb_mount_inset, fabrication.wood_species