


WOODY CONTROLLER BODY | TAIL CAP | rev A | 1 per instrument | 6 mm oak

Tail cap - plan, seen from INSIDE the body (the DXF's frame); X across the body, Y up; the recess is cut from the outer face

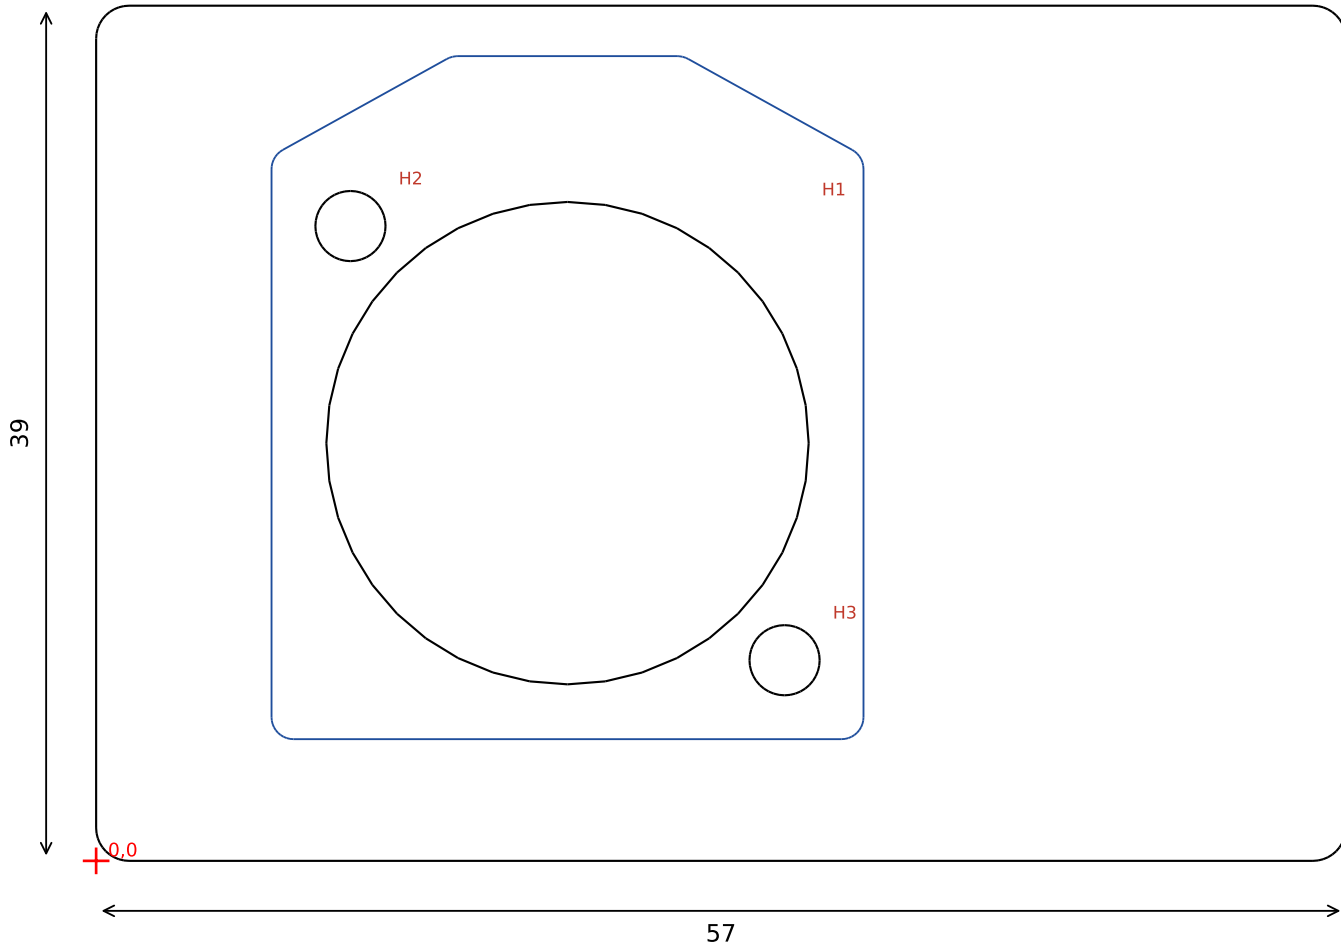

HOLES (part frame, mm)

id	what	X	Y	dia	depth	goes in it (hardware/bom.csv)
H1	etherCON bore	21.5	19.05	22	through	J-UMBILICAL-INST: NE8FAV
H2	etherCON flange screw	11.6	28.95	3.2	through	MECH-ETHERCON-SCREW: Neutrik A-series mounting screw (A-Scre
H3	etherCON flange screw	31.4	9.15	3.2	through	MECH-ETHERCON-SCREW: Neutrik A-series mounting screw (A-Scre

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, etherCON bore and screw holes	tail-cap.dxf
outer face	3	etherCON recess: leaves the connector its panel	tail-cap-recess.dxf

NOTES

- MATERIAL: hardwood, the owner's choice (the parts are named oak) - status tbd (config/body.yaml fabrication.wood_species)
- STOCK THICKNESS: 6, finished (fab-geometry.echo; ends.tail_cap_t)
- FINISH: stained a very dark ebony, the grain still showing, under a satin oil finish (fabrication.wood_finish)
- TOL: profile +/-0.2, depths +/-0.1 (fabrication.wood_*_tol); holes for hardware to the hardware's own fit, below
- etherCON recess: a router pass from the outer face, tail-cap-recess.dxf, leaving the connector its panel (config/body.yaml ethercon.panel_max)
- COUNTERSINKS: none. Pockets and counterbores are flat-bottomed
- EDGES: the model's sanded roundover, stack.edge_r = 1.5 (tbd), is in the STEP; it may be left for sanding by hand
- QTY PER INSTRUMENT: 1 | BOM ENDCAP-TAIL: TBD - oak, same stock as BODY-OAK (open)

OPEN FIGURES this part depends on: 4 tbd, so blocking, of 9 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

ends.tail_cap_t, ethercon.recess_margin, ethercon.offset_y, fabrication.wood_species