


WOODY CONTROLLER BODY | MATRIX WINDOW | rev A | 1 per instrument | 3 mm acrylic

Matrix window - plan, seen from above, top face up; X along the body, Y across

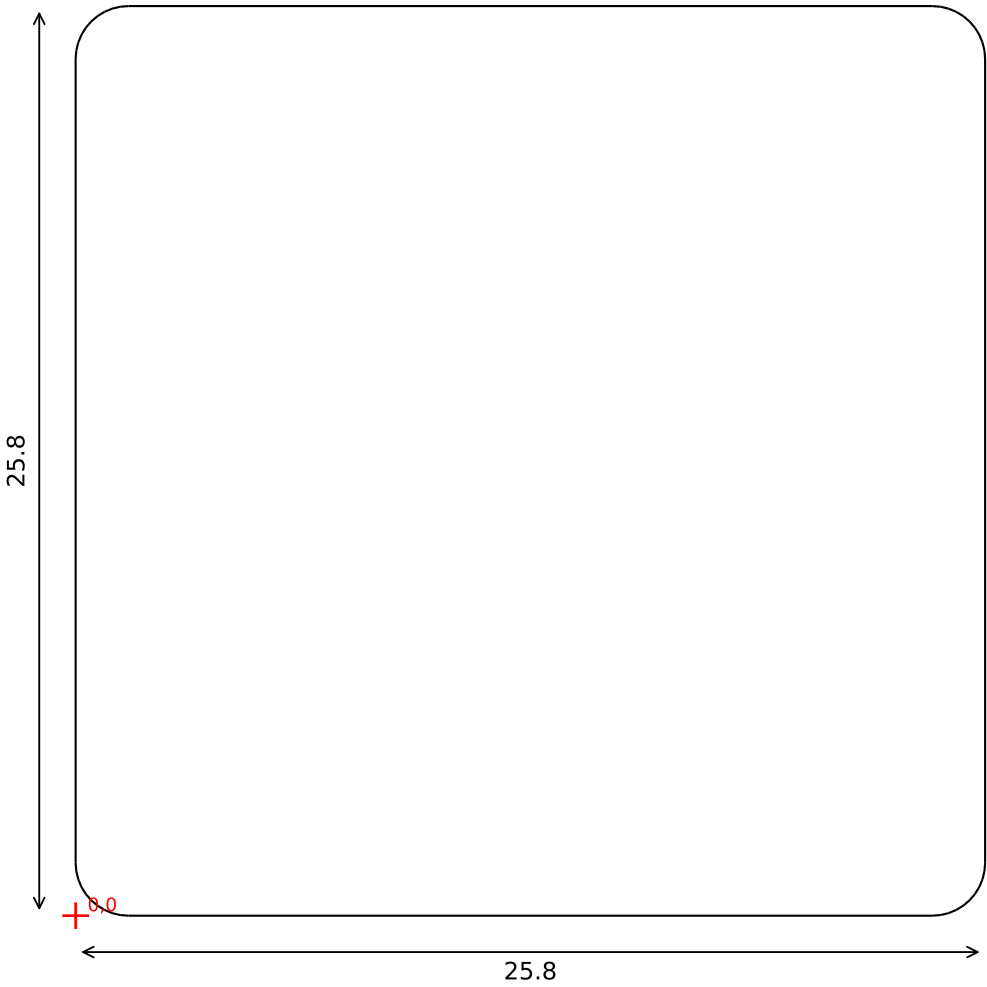

CUTS AND DEPTH (one file per layer, all in one frame; depths from the face named)

face	depth	what	file (in this folder)
-	through	outline, in the oak top's rebate	matrix-window.dxf

NOTES

- MATERIAL: acrylic (PMMA) sheet (nominal), 3 thick (openings.matrix_acrylic_t, tbd)
- TINT: colourless (tbd, fabrication.window_tint)
- SURFACE: frosted, on the top face (fabrication.window_surface, window_frosted_face: tbd)
- EDGES: as laser cut (fabrication.acrylic_edge)
- TOL: profile +/-0.1 (fabrication.acrylic_profile_tol)
- HOLES: none. One closed outline, cut through
- FIT: drops into the oak top's rebate, flush with its playing face (oak-top-rebate.dxf in the oak folder): its thickness is the rebate's depth
- QTY PER INSTRUMENT: 1 | BOM MECH-WINDOW: Frosted acrylic window (open)

OPEN FIGURES this part depends on: 14 tbd, so blocking, of 22 tbd or nominal (each with what decides it: mechanical/fab/open-figures.csv)

stack.cap_clear, stack.side_inset, ends.mouth_cap_t, ends.tail_cap_t, layout.mouth_extra, layout.tail_clear, layout.underside_clear, boards.sensor_lead_row, boards.umb_adapter_t, boards.board_clear, openings.matrix_lip, openings.matrix_acrylic_t, fabrication.window_tint, fabrication.window_frosted_face