



Certifications & Ratings

- RoHS compliant

Application

The 605 Series LED Panel Mount Indicators are designed for a variety of applications such as.


- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

... and many more!


Dimensions

inches [mm]

Protruding

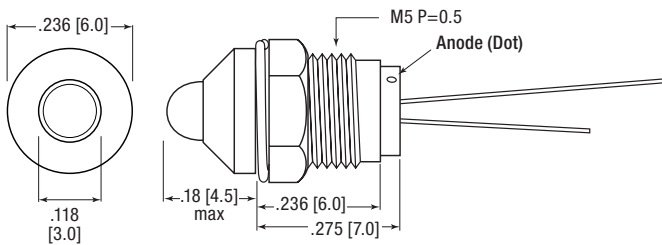

Recessed

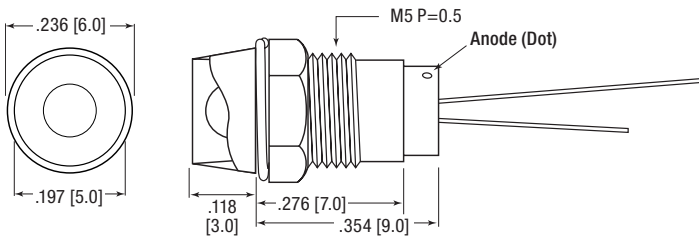

Mechanical Information

- Mounting Hole Size:** 0.205" (5.2 mm)
- Max Panel Thickness:** 0.138" (3.5 mm)
- Mounting Torque:** 0.362 lbs/ft (5 kg/cm)

Specifications

- Voltage Options:** 2VDC (resistor required)
- Operating temp:** -25 °C to +85 °C (-13 °F to +185 °F)
- Storage Temp:** -25 °C to +100 °C (-13 °F to +212 °F)
- Electrical Connection:** Through hole leads
- Housing:** Brass—Chrome plated
- Terminals:** Copper—Nickel Plated
- Lock washer:** Iron—Nickel Plated
- Nut:** Brass—Nickel Plated

Ordering Information 605 Series

Part Number	Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)	LED Position	Finish
605-1111-110F	 Red	2	15	60	Protruding	Chrome
605-1211-110F	 Green			70		
605-1311-110F	 Yellow			50		
605-2111-110F	 Red			60	Recessed	
605-2211-110F	 Green			70		
605-2311-110F	 Yellow			50		

particular purpose, title, and noninfringement.

www.dialightsignalsandcomponents.com

mitation, any warranties of merchantability, fitn

