



## 605 SERIES 5mm Panel Mount Indicators

### MECHANICAL / SPECIFICATIONS

MOUNTING HOLE SIZE:  
0.205" (5.2 mm)

MAX PANEL THICKNESS:  
0.138" (3.5 mm)

MOUNTING TORQUE:  
0.362 lbs/ft (5 kg/cm)

VOLTAGE OPTIONS:  
2VDC (resistor required)

ELECTRICAL CONNECTION:  
Through hole leads\*

HOUSING:  
Brass–Chrome plated

TERMINALS:  
Copper–Nickel Plated

LOCK WASHER:  
Steel–Nickel Plated

NUT:  
Brass–Nickel Plated

*\*LED leads are always insulated  
from indicator housing.*


CERTIFICATIONS & RATINGS  
RoHS compliant

### APPLICATION

The 605 Series LED Panel Mount Indicators are designed for a variety of applications such as.

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

### DIMENSIONS inches [mm]

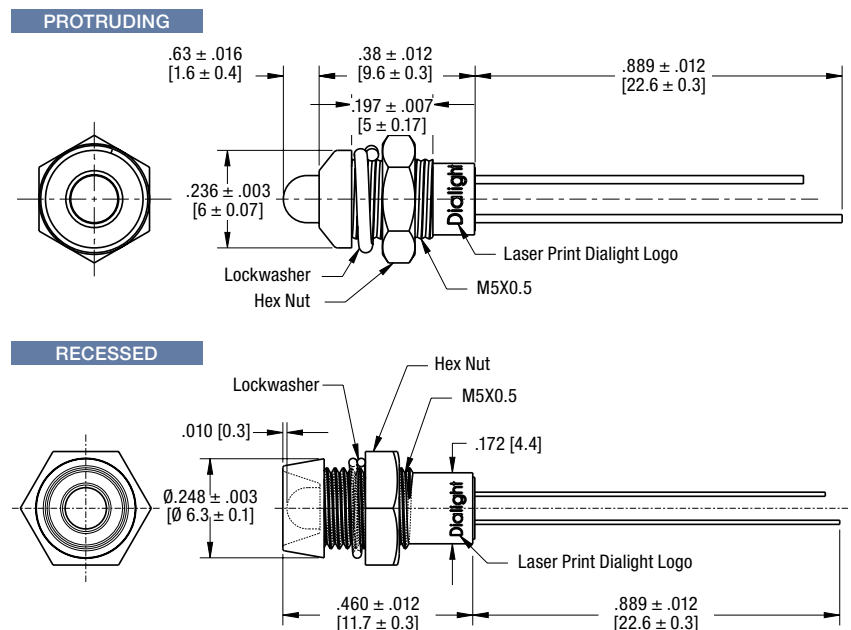

*These indicators are non-polarized*

## ORDERING INFORMATION

ESD Footnote Codes: Part Number Guide All HBM Values

| Part Number                   | Class | Color    | Voltage<br>(V DC) | Current<br>(mA) | Intensity (mcd) |      | LED Position | Finish | Operating<br>Temperature | Storage<br>Temperature |
|-------------------------------|-------|----------|-------------------|-----------------|-----------------|------|--------------|--------|--------------------------|------------------------|
|                               |       |          |                   |                 | Min.            | Max. |              |        |                          |                        |
| <a href="#">605-1111-110F</a> | 1C    | ● Red    | 2                 | 30              | 460             | 780  | Protruding   | Chrome | -40 °C to +85 °C         | -40 °C to +100 °C      |
| <a href="#">605-1211-110F</a> |       | ● Green  | 3                 |                 | 2000            | 3000 |              |        |                          |                        |
| <a href="#">605-1311-110F</a> |       | ● Yellow | 2                 |                 | 460             | 780  |              |        |                          |                        |
| <a href="#">605-2111-110F</a> |       | ● Red    | 2                 | 20              | 400             | 600  | Recessed     |        | -40 °C to +85 °C         |                        |
| <a href="#">605-2211-110F</a> |       | ● Green  | 3                 |                 | 900             | 1400 |              |        |                          |                        |
| <a href="#">605-2311-110F</a> |       | ● Yellow | 2                 |                 | 400             | 600  |              |        | -25 °C to +85 °C         | -25 °C to +85 °C       |



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialightsignalsandcomponents.com](http://www.dialightsignalsandcomponents.com)

Warranty Statement: Except for the warranty expressly provided for at: [www.dialight.com/resources/warranties/](http://www.dialight.com/resources/warranties/), Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.