



Sheet 1




File: sheet1.kicad_sch

Sheet 2




File: sheet2.kicad_sch

Sheet 3




File: sheet3.kicad_sch

Sheet 4





File: sheet4.kicad_sch


Sheet 5




File: sheet5.kicad_sch

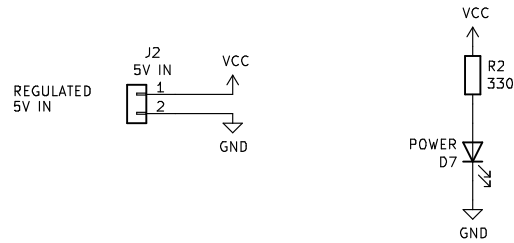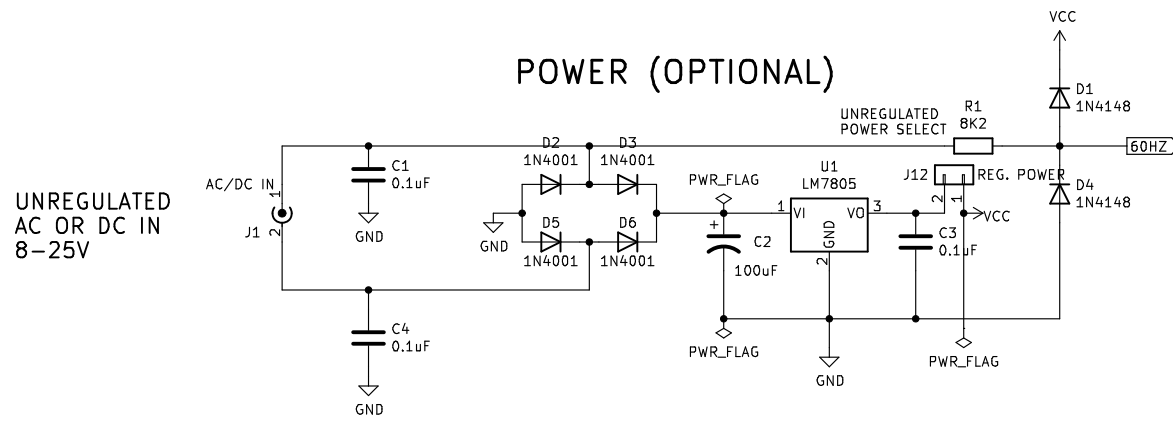


UNUSED GATES

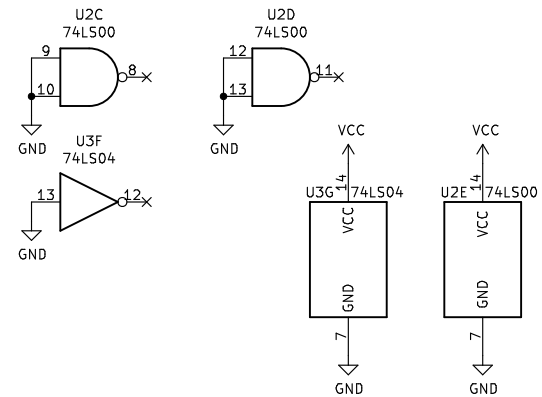


BYPASS CAPS (ONE PER IC)

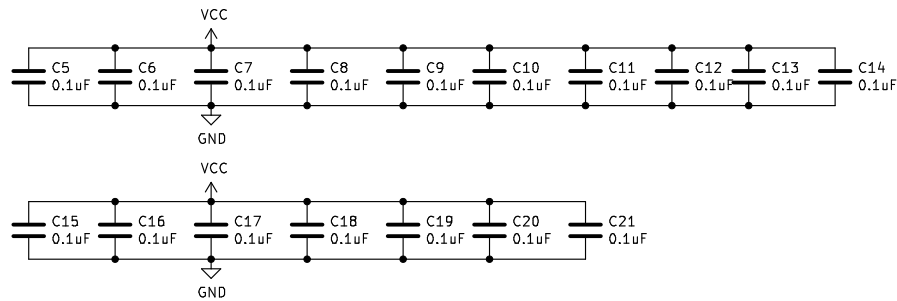


DISPLAY

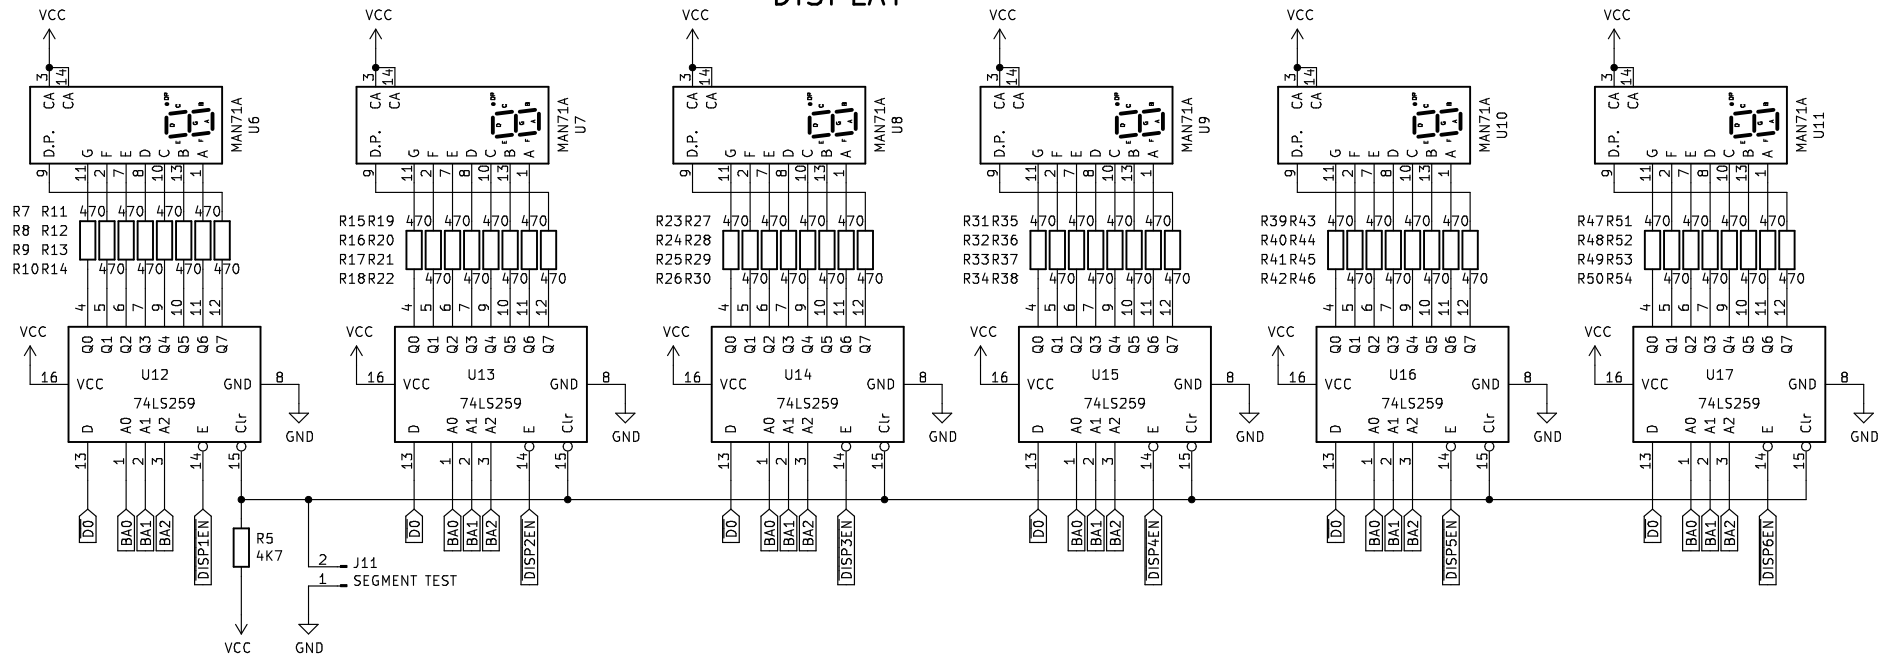


KEYPAD

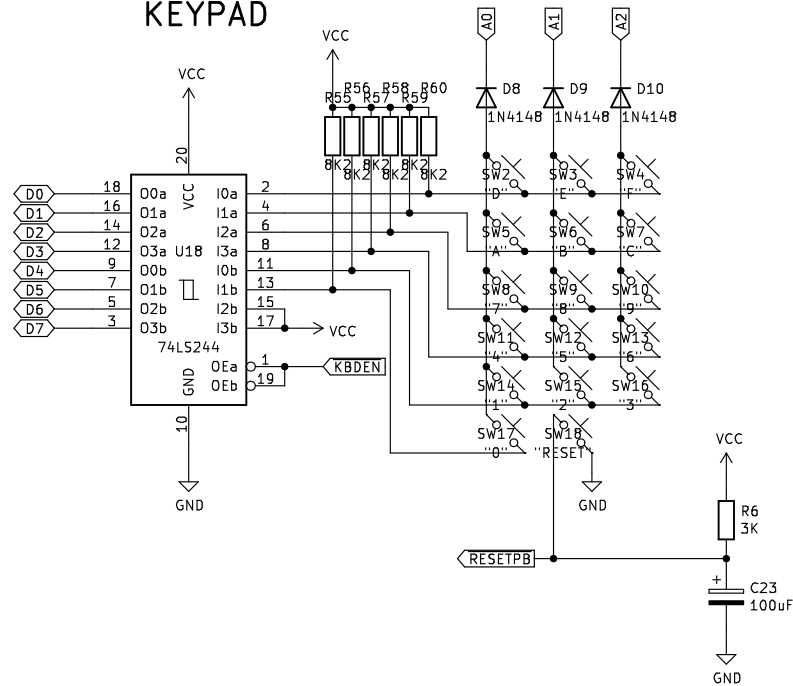


CPU

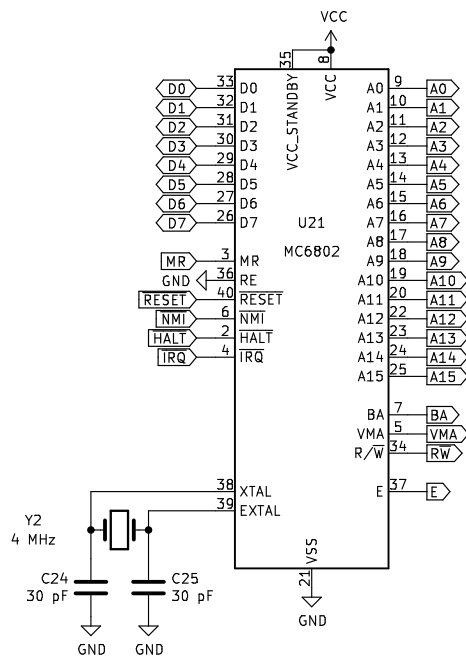



RAM (32K)

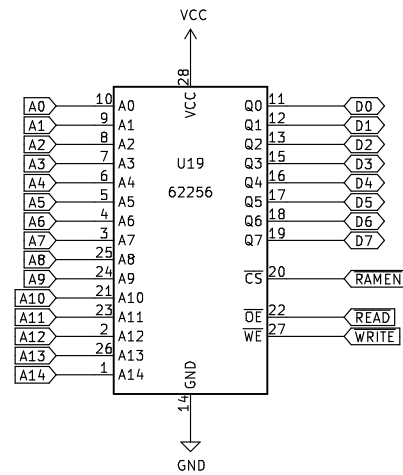


ROM (16K)

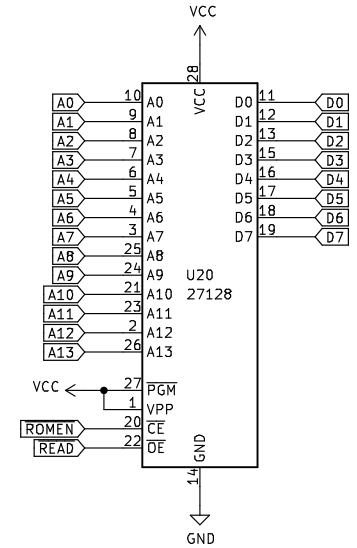


ADDRESS DECODING

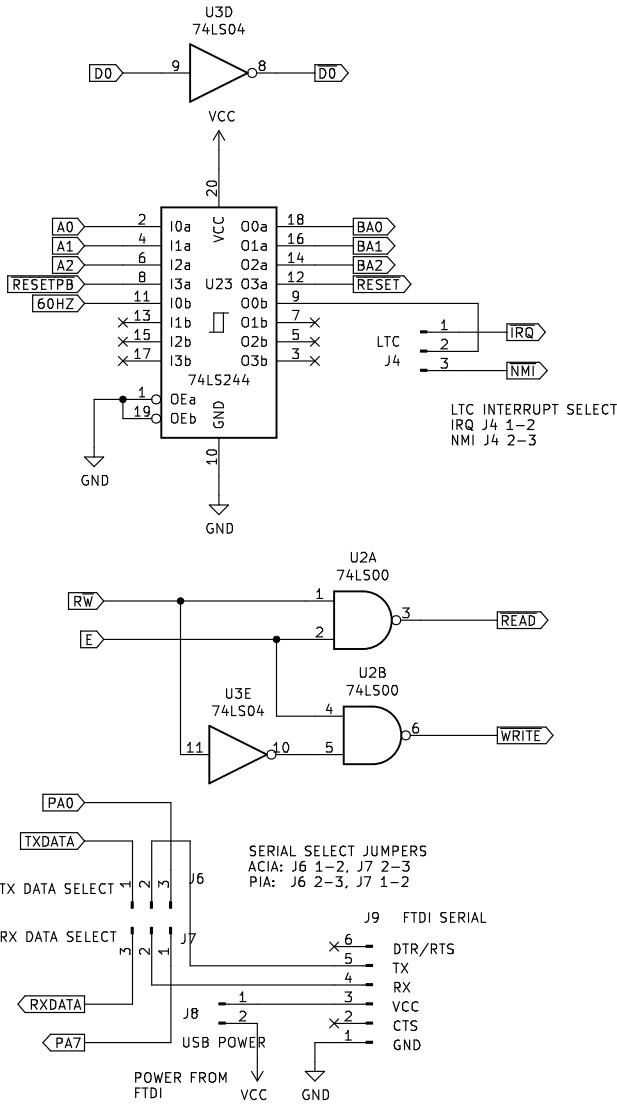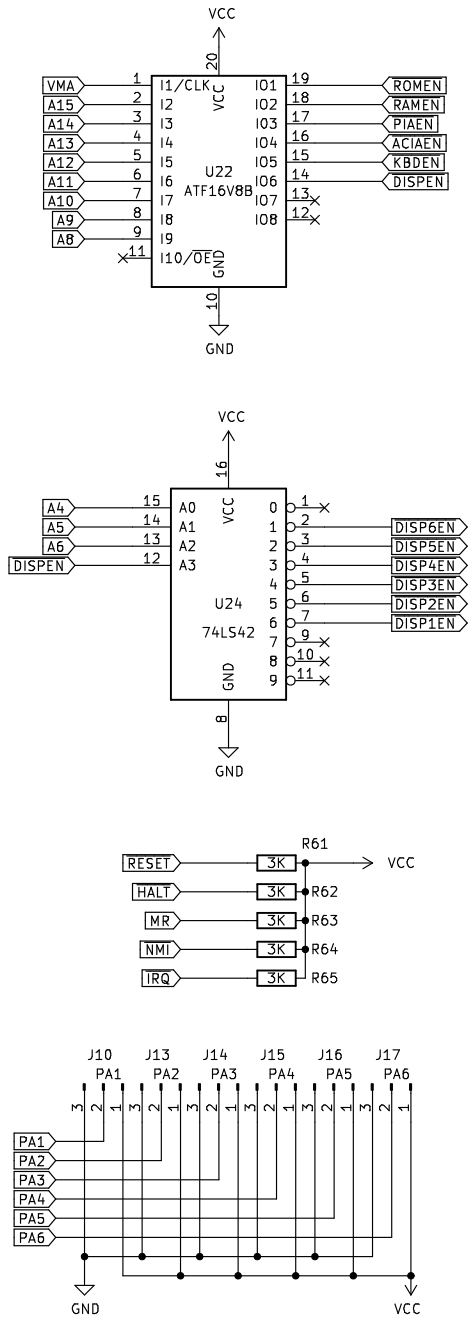

PARALLEL INTERFACE

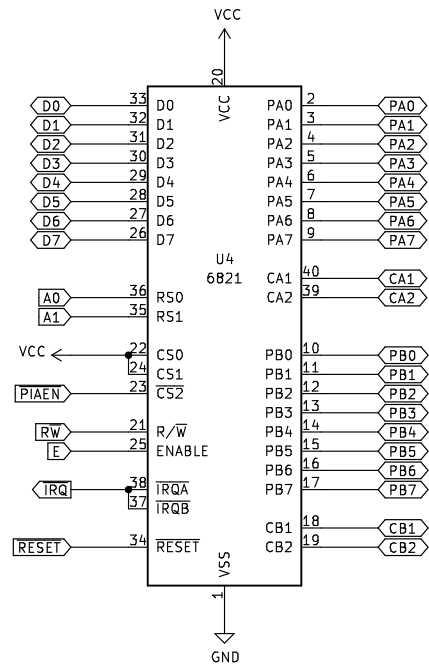

SERIAL INTERFACE

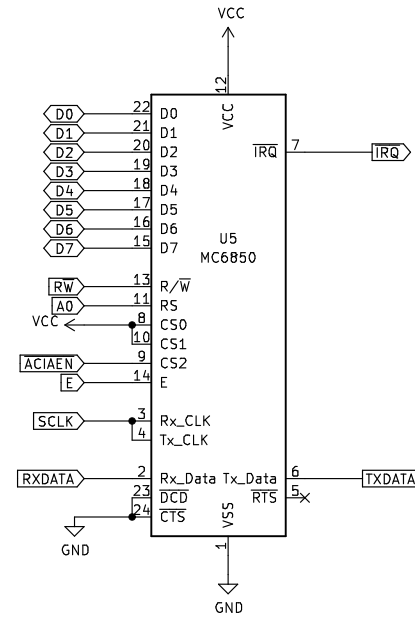

SERIAL CLOCK (115,200 BPS X 16)

