



Contents lists available at ScienceDirect


## Chemical Engineering Journal

journal homepage: [www.elsevier.com/locate/cej](http://www.elsevier.com/locate/cej)Highly robust and efficient Ti-based Sb-SnO<sub>2</sub> anode with a mixed carbon and nitrogen interlayer for electrochemical 1,4-dioxane removal from waterNaresh Mameda<sup>a</sup>, Hyeona Park<sup>b</sup>, Syed Salman Ali Shah<sup>b</sup>, Kibaek Lee<sup>a,c</sup>, Chi-Wang Li<sup>d</sup>, Vincenzo Naddeo<sup>e</sup>, Kwang-Ho Choo<sup>a,b,\*</sup><sup>a</sup> Advanced Institute of Water Industry, Kyungpook National University, 80 Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea<sup>b</sup> Department of Environmental Engineering, Kyungpook National University, 80 Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea<sup>c</sup> Department of Biotechnology and Biochemical Engineering, Chonnam National University, 77 Yongbong-ro, Buk-gu, Gwangju 61186, Republic of Korea<sup>d</sup> Department of Water Resources and Environmental Engineering, Tamkang University, 151 Yingzhuan Road, Tamsui District, New Taipei City 25137, Taiwan<sup>e</sup> Sanitary Environmental Engineering Division, Department of Civil Engineering, University of Salerno, Fisciano 84084, SA, Italy

## HIGHLIGHTS

- A novel Ti-based Sb-SnO<sub>2</sub> anode was fabricated via the insertion of TiONC interlayers.
- The interlayer enhanced the crystallinity, current density, and oxygen evolution potential.
- Complete 1,4-dioxane mineralization was achieved at a rate constant of  $1.91 \times 10^{-2} \text{ min}^{-1}$ .
- The accelerated life of Ti/TiONC/Sb-SnO<sub>2</sub> was ~25 times longer than that of Ti/Sb-SnO<sub>2</sub>.
- Enhanced durability resulted from blocking oxidants and corrosive ions using the interlayer.

## GRAPHICAL ABSTRACT

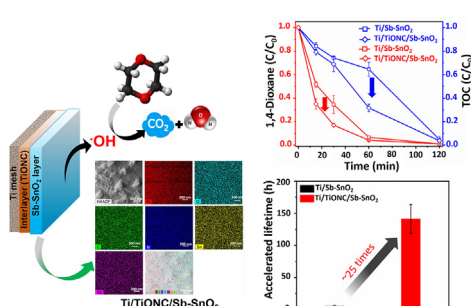

## ARTICLE INFO

## Keywords:

Sb-SnO<sub>2</sub>

Electrode stability

Interlayer

Service life

1,4-Dioxane

## ABSTRACT

Ti-based Sb-SnO<sub>2</sub> electrodes are attractive due to their excellent catalytic activity but have a short service life. Here, we report a highly stable and efficient Ti/TiONC/Sb-SnO<sub>2</sub> electrode, which was fabricated through hydrothermal reactions using urea to form TiONC interlayers and electrodeposition-annealing to coat the active Sb-SnO<sub>2</sub> catalysts. The triple-layered anode was characterized by highly crystalline structures, high oxygen evolution potentials, and corrosion-resistance properties. The structural arrangement yielded better electrocatalytic performances than that using the control electrode (Ti/Sb-SnO<sub>2</sub>), showing enhanced organics degradation efficiencies. This new electrode's lifetime was significantly (~25 times) longer than that of either the control or any Sb-SnO<sub>2</sub> electrode modified with non-precious materials reported in the literature. The electrode's enhanced stability was attributed to the insertion of the mixed C and N interlayers that are resistant to oxidants and corrosive ions. The Ti/TiONC/Sb-SnO<sub>2</sub> anode holds promise for use in electrochemical water treatment.

\* Corresponding author at: Department of Environmental Engineering, Kyungpook National University, 80 Daehak-ro, Buk-gu, Daegu 41566, Republic of Korea.  
E-mail address: [chookh@knu.ac.kr](mailto:chookh@knu.ac.kr) (K.-H. Choo).