


CONTROLLED

Fernando Trujillo

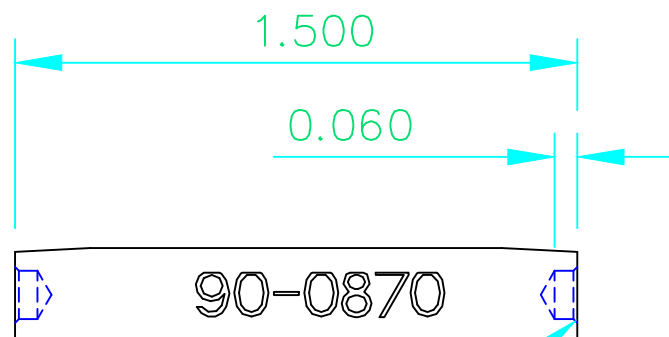

2x
0.200 x 0.01
CHAMFER

2x
0.01 CHAMFER

NOTE: STAMP P/N HAS SHOWN.

$\phi.129 \pm .002$
(#30 DRILL)

$\phi.250$

PART NO. 90-0870 REV. 4

PART NAME
UPSET PIN FOR 1.5 mm
OR 0.060 BARE CABLE
AUT. BIRDCAGE MACHINES

FO-DE-039-MAMX
Rev. 10/07/2014



KONSGBERG
AUTOMOTIVE

STANDARD TOLERANCES
DECIMAL .XX = $\pm .010$
.XXX = $\pm .005$
ANGLES = $\pm 2^\circ$

MATERIAL D2
HEAT TREAT 58-62 RC

FINISH 63 OR BETTER

BY WHL DATE 11/19/90

SCALE: 2x

CK.	APPR.	REL.	REL. DATE	BY	DATE
NO.	CHANGE				
1	RELEASED			WHL	11/19/90
2	REDRAWING IN PROE, ADDED CHAMFER.			JBG	11/05/07
3	DIM 0.060 WAS 0.073; ADDED 0.200 x 0.01 CHAMFER.			DM	04/06/10
4	NEW FORMAT			FT	NOV/13/17