

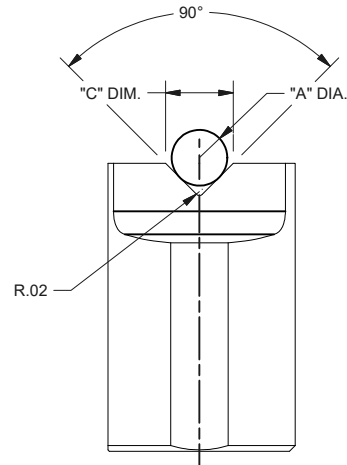
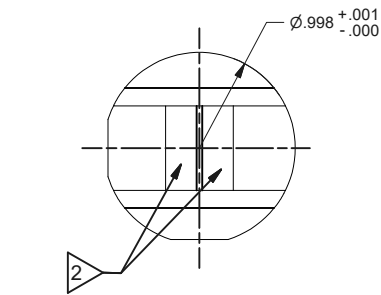


DASH NO.	"A" DIA.	"B" DIM.	"C" DIM.	REMARKS
-01	.180	.44	.255	1/4" O.D. FITTING ONTO 3/32 DIA. CABLE
-02	.132	.44	.187	3/16" O.D. FITTING
-03	.101	.25	.143	1/8" O.D. FITTING ONTO 3/64 & 1/16 DIA. CABLE
-04	.160	.25	.226	7/32" O.D. FITTING ONTO 5/64 DIA. CABLE
-05	.156	.44	.221	3/16" DIA. END ROD
-06	.120	.44	.170	21-1050-TAB END ROD

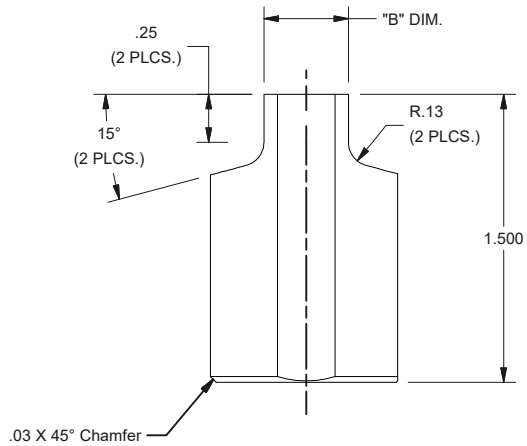

ENGRAVE AS SHOWN WITH
DASH NUMBER FROM TABLE

NOTES:

1. MATERIAL S-7 / HEAT TREAT Rc 56-58 / DOUBLE TEMPER

2. FINAL SWAGE SURFACES TO BE GROUND AND POLISHED TO 7-10 RMS FINISH TO REMOVE STRESS RISERS IN CORNER OF SWAGE AREA BEFORE HEAT TREAT.

3. 2 EA. BLOCKS REQD. FOR ONE SET.

REV. NO.	DWN BY	REVISIONS	INVENTOR	CHK. BY	PROJ. ENGR.	ENGR. MGR.	EFF. DATE:	TOOL DESCRIPTION: SQUARE SWAGE BLOCK		PART DESCRIPTION: N/A	
A	MM1	CONSOLIDATED 1" DIA. SQUARE SWAGE BLOCKS TO ONE TOOL NUMBER; RELEASE FOR MANUFACTURING.		DG	KW	DC	020520				
B	MM3	ADDED -06 TO TABLE FOR THE 21-1050-TAB END RODS; REVISE PRINT.		MO	DG	DC	031120	DRAWN BY: M. MOSHER	DATE: 1/8/2020	WESCON P/N	REV: N/A
								CHECKED BY: DEREK G.	DATE: 1/30/2020		SCALE: N/A
								PROJECT ENGR: KARIN W.	DATE: 2/4/2020		SHT. 1 of 1
								ENG MGR: DAN C.	DATE: 2/5/2020	TOOL NO. UT2000-TAB	REV: B

TOLERANCE UNLESS SPECIFIED: DECIMAL .XX ± .005 .XXX ± .002 FRACT. = ± 1/32 ANGULAR = ± 1/2°

WESCON
CONTROLS
2533 S. West St.
Wichita KS. 67217