


LOWER-STATIONARY BLADE

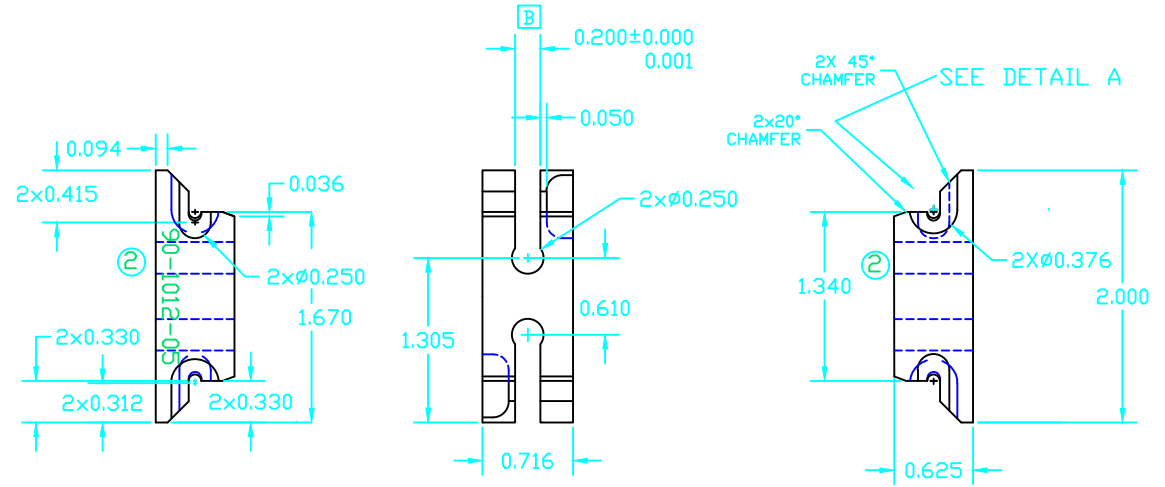

1 WHEN BLADE IS REWORKED, GROOVE MUST BE RE-GROUND TO ACHIEVE SHARPNESS WITH MINIMUM OF 0.010 BUT NEVER BELOW 1.600 MIN. AS SHOWN

NOTE: STAMP THE TOOLING NUMBER IN BOTH KNIFES (UPPER & LOWER) THE STAMP MUST BE AS SHOW IN THE DRAWING.

CK.	APPR.	REL.	REL. DATE	SCALE:		FO-DE-040-MAMX Rev. 10/07/2014		 KONSGBERG AUTOMOTIVE
NO.	CHANGE			BY	DATE	STANDARD TOLERANCES DECIMAL .XX = ±.010 .XXX = ±.005 ANGLES = ±2		
1	REDRAWN AND DIMENSIONED TO NEW AND REWORK BLADES			RD	22/4/03	MATERIAL		PART NAME BLADES FOR SECOND CUT MACHINES FOR CABLE.
2	STAMPING DDL NUMBER			AG	28/1/13	M2		
3	Double edged was single edge.			DM	23/7/19	FINISH		PART NO. 90-1012-05
						H.T. 58/60 Rc.		
						BY JM DATE Jul/15/10		REV. 3