

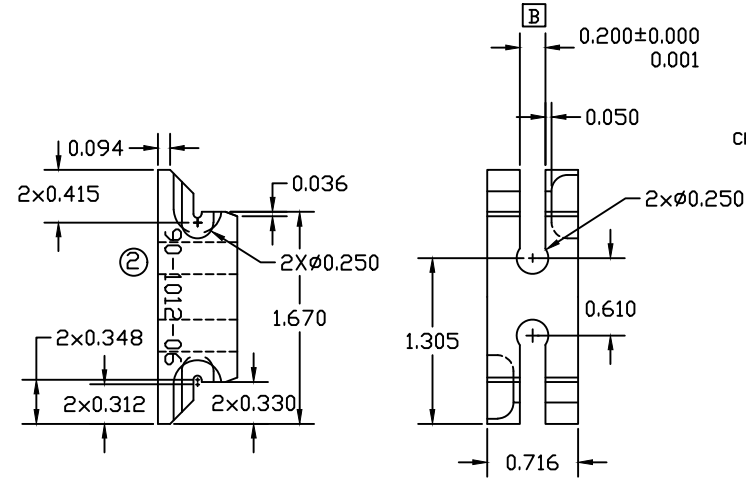


UPPER-MOVING BLADE

LOWER-STATIONARY BLADE

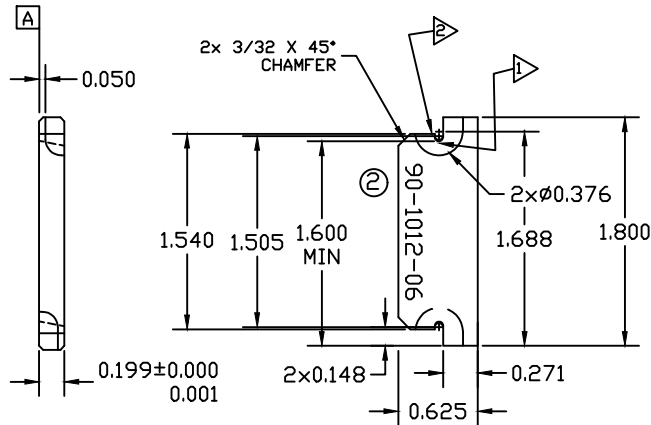

DETAIL A

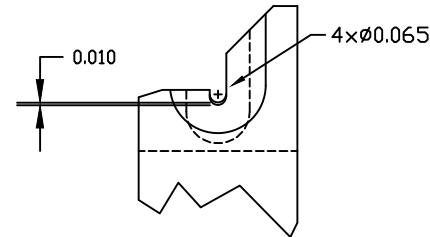

NOTE: THE DISTANCE BETWEEN EDGES MUST BE OF 0.010 OR 7.5 DEGREES WHEN BLADES ARE NEW

NOTE: STAMP THE TOOLING NUMBER IN BOTH KNIVES (UPPER & LOWER) THE STAMP MUST BE AS SHOWN IN THE DRAWING.

REWORK NOTES:

1 WHEN BLADE IS REWORKED, GROOVE MUST BE RE-GROUND TO ACHIEVE SHARPNESS WITH MINIMUM OF 0.010 BUT NEVER BELOW 1.600 MIN. AS SHOWN

2 BOTTOM OF GROOVE MUST BE PERPENDICULAR TO SURFACE A OR SURFACE B AS SHOWN

CK.	APPR.	REL.	REL. DATE	SCALE:	FO-DE-040-MAMX Rev. 10/07/2014	KONSGBERG AUTOMOTIVE
NO.	CHANGE	BY	DATE	STANDARD TOLERANCES DECIMAL .XX = ±.010 .XXX = ±.005 ANGLES = ±2	PART NAME BLADES FOR SECOND CUT MACHINES FOR CABLE.	
1	RELEASE	JM	07/15/10	MATERIAL	PART NO. 90-1012-06	
2	STAMPING OOL NUMBER	AG	28/1/13	FINISH	REV. 4	
3	Double edged was single edge.	DM	10/07/13	H.T. 58/60 Rc.		
4	ADD DETAIL A 4X and Tolerances	DM	23/07/15	BY JM DATE Jul/15/10		