


(FOR USE ON EWALD FLASH CUTTERS ON SMALL STRANDED CABLE ~
PURPOSE IS TO ELIMINATE A HARD, SHARP CORNER THAT COULD CUT
A CABLE STRAND)

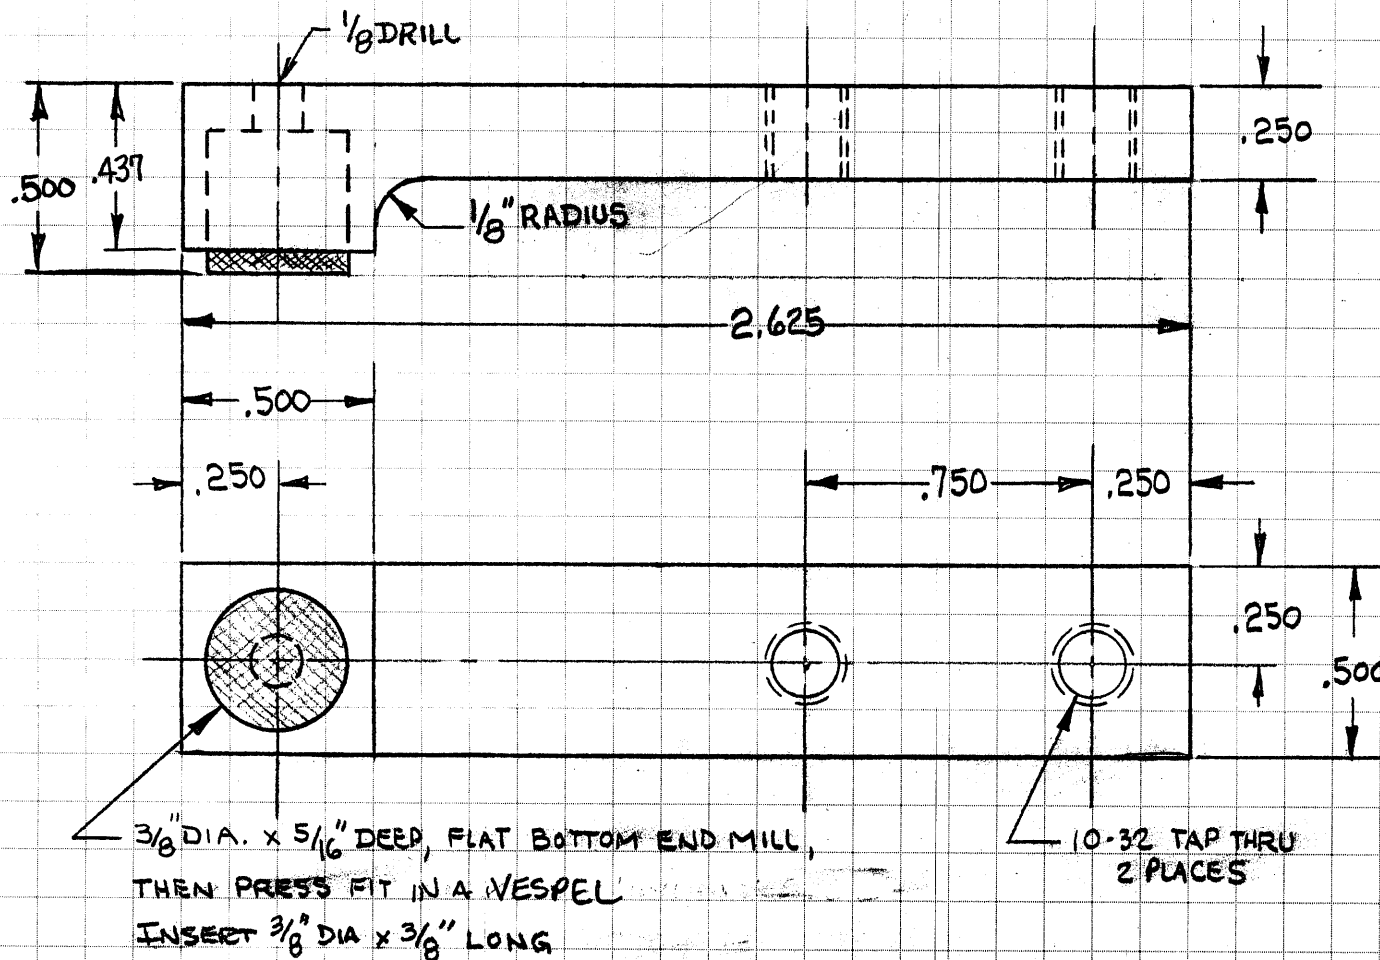

NOTE: INSERT USED IS MADE FROM VESPEL
COMPOSITE AS PURCHASED FROM MCMMASTER-CARR
P/N 89405K22 ~ 470°F HEAT DEFLECTION ~ 3/8" DIA. ROD

90-1105-01

2

VESPEL INSERT GRIP JAW
(FOR EWALD FLASH CUTTERS)

Capro. INC

STANDARD TOLERANCES

.XXX = $\pm .005$

ANGLES $\pm 2^\circ$

MATERIAL 01 OR D2
NOT HEAT TREATED
6 KEVLAR/NYLON COMPOSITE

FINISH SURFACE GRIND ALL
OVER

DWG
WHL

DATE	1-25-93
------	---------

SCALE: 2x

NO.	WHL	APPR. WHL	REL. WHL	REL. DATE 1-25-93
NO.		CHANGE		
1	RELEASE		WHL	DATE 1-25-93
2	VESPEL ; WAS KEVLAR/NYLON		WE	6-13-96