


DASH	TYPE	BUTTON DIA	"A"	"B"	"C"	"D"	"E"	REMARKS
-011	II	1/8	.125	.060	.052	.38		
-012						.44		
-021						.38		
-022						.44		
-031	II	3/16	.194	.097	.084	.38		
-032						.44		
-041						.38		
-042						.44		
-051	II	1/4	.264	.132	.114	.38		
-052						.44		
-061						.38		
-062						.44		
-071	II	5/16	.324	.162	.141	.38		
-072						.44		
-081						.38		
-082						.44		
-091	II	7/16	.482	.241	.209	.38		
-092						.44		
-101						.38		
-102						.44		
-111	II	1/2	.554	.277	.240	.38		
-102						.44		
-111						.38		
-112						.44		
-121	II	.468	.450	.225	.195	.44		HARLEY
-122	III	3/8 HEX	.448	.230	.186	.318		13-3000-26 ADJUSTER
-123	III	5/16	.324	.162	.140	.44		
-124	III	1/4	.264	.132	.114	.44		
-125	III	13/32	.434	.217	.188	.44		
-126	III	7/16	.482	.241	.209	.44		
-127	III	1/2	.554	.277	.240	.44		
-128	III	15/32	.542	.271	.235	.44		15-0530-227

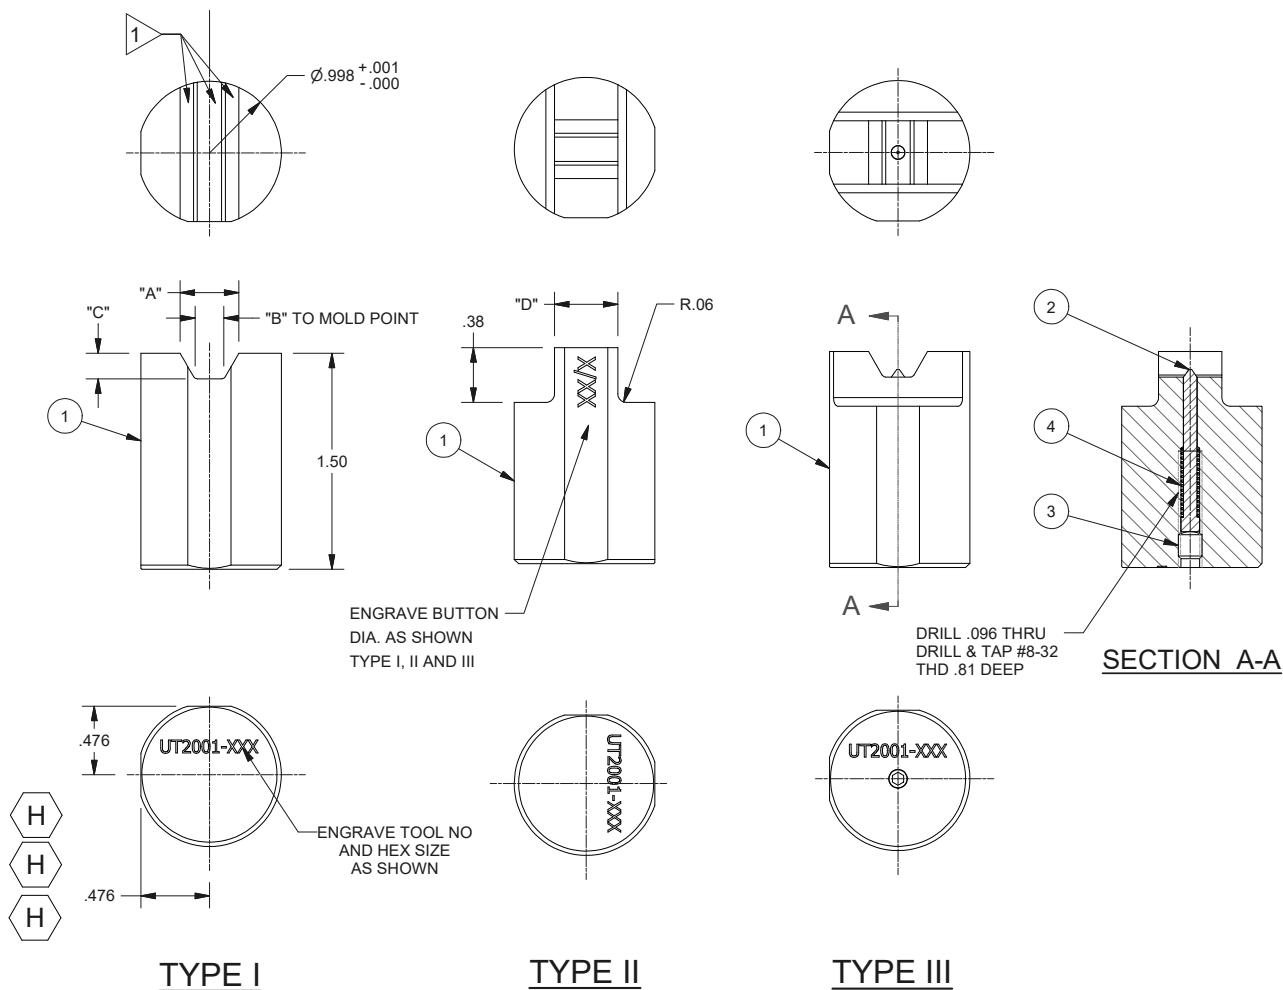

NOTES:

1. FINAL SWAGE SURFACES TO BE GROUND AND POLISHED TO 7-10 RMS FINISH TO REMOVE STRESS RISERS IN CORNERS OF SWAGE AREAS BEFORE HEAT TREAT.
2. SEE TYPE I FOR MISSING DIMENSIONS AND NOTES.
3. 2 BLOCKS REQD. FOR ONE SET.

4	2	Generic	KANSAS COIL PART# KCF1845 (STOCKED ITEM)		
3	2	Steel, Mild	#8-32 X .19 SET SCR.		
2	2	Generic	TCS GEN-37 PORTER PUNCH (STOCKED ITEM)		
1	2	S-7	.998 DIA X 1.500	Rc 55-58	
ITEM	QTY	MATERIAL	DESCRIPTION	H.T.	SHT NO.

REV. NO.	DWN BY	EW0 26214	REVISIONS			INVENTOR	CHK. BY	PROJ. ENGR.	ENGR. MGR.	EFF. DATE:	TOOL DESCRIPTION: HEX SWAGE BLOCK		PART DESCRIPTION: N/A					
G	MM11	ADDED -125 PER TP831; REVISED PRINT.					NM	CW	SS	112117	DRAWN BY: M. COX DATE: 8/12/2009 CHECKED BY: R. PUGH DATE: 8/18/2009 PROJECT ENGR: E. EATER DATE: 8/18/2009 ENG MGR: TONY B. DATE: 8/18/2009		WESCON P/N N/A		REV: N/A			
H	MM1	ADDED -126 THRU -128 PER PRODUCTIONS REQUEST; REVISED PRINT.					MO	DG	DC	012320			 WESCON CONTROLS 2533 S. West St. Wichita KS. 67217		SCALE: N/A	SHT. 1 of 1		
TOLERANCE UNLESS SPECIFIED:										DECIMAL			.XX ± .005	.XXX ± .001	FRACT. = ± 1/32	ANGULAR = ± 1/2°	TOOL NO.	UT2001