

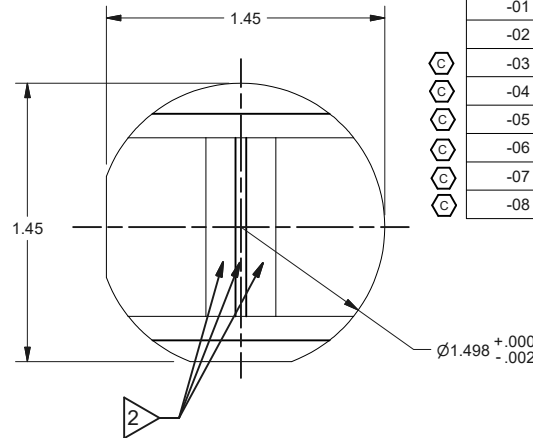


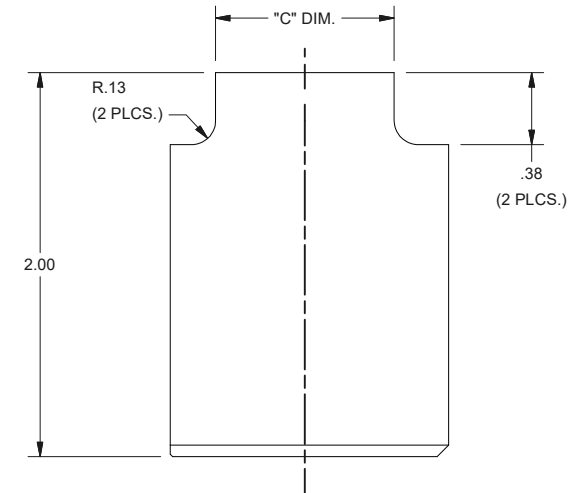

DASH NO.	"A" DIA.	"B" DIM.	"C" DIM.	REMARK
-01	.257	.363	.93	.31 DIA. ROD (BRAKE)
-02	.300	.424	.93	.38 DIA. ROD (BRAKE)
-03	.295	.417	.69	3/8" O.D. FITTING ONTO 3/16" DIA. CABLE
-04	.250	.354	.69	5/16" O.D. FITTING ONTO 1/8" DIA. CABLE
-05	.180	.255	.56	1/4" O.D. FITTING ONTO 3/32" DIA. CABLE
-06	.138	.195	.44	3/16" O.D. FITTING ONTO 3/64" & 1/16" DIA. CABLE
-07	.233	.330	.56	.298" O.D. FITTING ONTO 1/8" DIA. CABLE
-08	.166	.235	.56	7/32" O.D. FITTING ONTO 5/64" DIA. CABLE

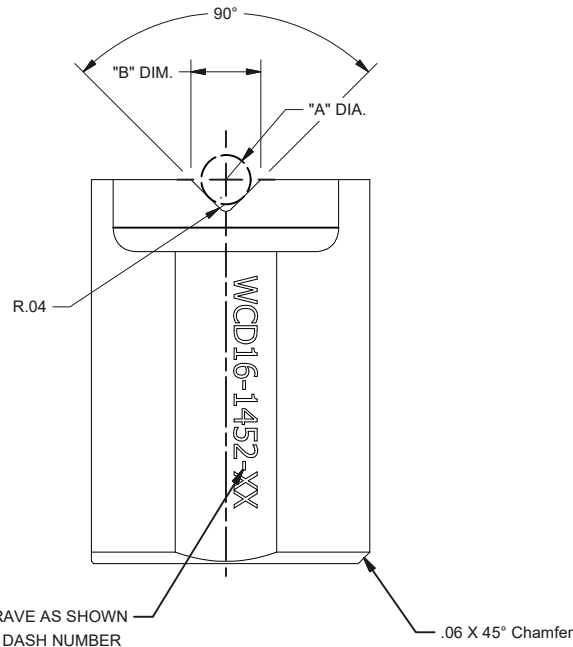

NOTES:

1. MATERIAL : S-7 / HEAT TREAT Rc 56-58 / DOUBLE TEMPER.

2. FINAL SWAGE SURFACES TO BE GROUND AND POLISHED TO 7-10 RMS FINISH TO REMOVE STRESS RISERS IN CORNERS OF SWAGE AREAS, BEFORE HEAT TREAT.

ENGRAVE AS SHOWN WITH DASH NUMBER

.06 X 45° Chamfer

REV. NO.	DWN BY	REVISIONS	MDM INVENTOR	CHK. BY	PROJ. ENGR.	ENGR. MGR.	EFF. DATE:	TOOL DESCRIPTION:	PART DESCRIPTION:
B	MM11	UPDATED TITLE BLOCK; CREATED SOLID MODEL OF SWAGE BLOCKS PER PRODUCTIONS REQUEST; ADDED "B" DIMENSION TO TABLE; ADDED ADDITIONAL FLAT; REVISED PRINT.		JC	MO	SS	110618	SWAGE BLOCK SQUARE	END ROD
C	MM2	CONSOLIDATED BLOCKS TO ONE PRINT; ADDED -03 THRU -08; REVISE PRINT.		DG	MO	DC	013120		
TOLERANCE UNLESS SPECIFIED: DECIMAL .XX ± .005 .XXX ± .002 FRACT. = ± 1/32 ANGULAR = ± 1/2°								DRAWN BY: M. COX CHECKED BY: JAKE C. PROJECT ENGR: MATT O. ENG MGR: SCOTT S.	DATE: 9/15/2004 DATE: 11/6/2018 DATE: 11/6/2018 DATE: 11/6/2018
								WESCON CONTROLS 2533 S. West St. Wichita KS. 67217	WESCON P/N SCALE: N/A SHT. 1 of 1 REV: C