

J4210U API Documentation

Revision Date: 2022-12-21

Table of Contents

Auto Detection Tags.....	2
Demo.....	2
DLL Functions.....	2
unsigned char AvailablePorts(char ports[2048]);.....	3
unsigned char OpenPort(unsigned char* port, int baud);.....	3
void ClosePort();.....	3
unsigned char LoadSettings(unsigned char* readerinfo).....	3
unsigned char SaveSettings(unsigned char* readerinfo).....	4
int Inventory(unsigned char filter).....	4
unsigned char GetResult(unsigned char *scanresult, int index).....	4
unsigned char GetTID(unsigned char* epc, unsigned char epclen, unsigned char* tid, unsigned char* tidlen).....	5
unsigned char GetTagInfo(unsigned char* tid, unsigned char* info).....	5
unsigned char SetPassword(unsigned char* epc, unsigned char epclen, unsigned char* pwd, unsigned char pwrlen).....	6
unsigned char SetKillPassword(unsigned char* epc, unsigned char epclen, unsigned char* kpwd, unsigned char kpwrden).....	6
void LastError(char* error).....	6
unsigned char Auth(unsigned char* pwd, unsigned char pwrlen).....	6
unsigned char WriteMemWord(unsigned char* epc, unsigned char epclen, unsigned char* data, unsigned char windex).....	7
unsigned char ReadMemWord(unsigned char* epc, unsigned char epclen, unsigned char* data, unsigned char windex).....	7
unsigned char SetFilter(int maskAdrByte, int maskLenInByte, unsigned char* maskDataByte).....	7
int TagType().....	8
unsigned char TagName(char* name).....	8
unsigned char WriteEpcWord(unsigned char* epc, unsigned char epclen, unsigned char* epcword, unsigned char windex).....	8
unsigned char TagExists(unsigned char* epc, unsigned char epclen).....	8
unsigned char SetGPO(unsigned char gpono).....	9
unsigned char GetGPI(unsigned char gpino).....	9
unsigned char SetQ(unsigned char Q).....	9
unsigned char SetSession(unsigned char sess).....	9
Jence Uhf App.....	9
How to download and use the Application.....	10
Optimal Setup.....	17
Setup.....	18
Raspberry PI.....	18
Installation.....	19
Banana PI.....	20

Installation.....	21
Orange PI.....	22
Installation.....	22
BeagleBone.....	23
PocketBeagle.....	24
Installation.....	24
Displaying Graphics on PC.....	25
BeagleBone AI-64.....	26
Mac OS X.....	26
Troubleshooting.....	26
1. Could not connect to device.....	26
2. Could not detect type of card.....	26
3. Could not perform inventory.....	26
4. Not all tags are detected in the first scan.....	26
Driver Version History.....	26
Version 1.8.....	26
Version 1.7.....	27
Version 1.6.....	27
Version 1.5.....	27
Version 1.4.....	27
Version 1.3.....	27
Version 1.2.....	27
Version 1.1.....	27
Version 1.0.....	27

Go to **demo** directory, you will find J4210U.dll. This is the main DLL for accessing the reader. There are other DLL, which will also be needed. This is a 64-bit DLL. 32-bit is no longer supported.

This DLL can also be loaded in C# and Python using standard procedure.

Auto Detection Tags

HIGGS_3, HIGGS_4, HIGGS_EC, HIGGS_9, MONZA_4I, MONZA_4E, MONZA_4D, MONZA_4QT, MONZA_R6, UCODE_DNA, UCODE_7, EM4423. Auto detection enables internal knowledge of the card, therefore, programming a card become easier.

Demo

There is a demo folder which contains a card dump program. The program is written in Java and the source code is provided with detailed comment. The demo will run on Windows PC. In order to run on Linux and Mac OS X, open the program with Eclipse on respective platform and run from Eclipse.

The demo program is written using SWT API. This GUI API is fast and have a native look and feel. GUI written in SWT runs on multiple platform. Only the swt.jar file needs to be replaced with the platform specific version.

DLL Functions

Following DLL functions are available.

unsigned char AvailablePorts(char ports[2048]);

Auto detects available serial ports and copies them into the two dimensional array.

Parameters:

ports: com port name array. Must be of size 256 x 8 or a single dimension array of 2048.

Example: ports[0] = "COM4", ports[1] = "COM7", etc

Returns: 1 on success.

unsigned char OpenPort(unsigned char* port, int baud);

Opens a COM port.

Parameters:

port: com port name. Example "COM4", etc

baud: baudrate, should be one of 57600, 115200.

Returns: 1 on success.

void ClosePort();

Closes COM port that was opened. Otherwise does nothing.

unsigned char LoadSettings(unsigned char* readerinfo)

Loads settings into the array. The array size should be sufficient enough to hold the data. The data structure to hold the data is as follows:

```
struct ReaderInfo {
    // the following constants are reader constants
    // they cannot be changed.
    int Serial = 0;
    char VersionInfo[2] = {0,0};
    unsigned char Antenna = 0;
    unsigned char ComAdr;
    unsigned char ReaderType;

    // the following variables are reader parameters
    // which can be changed. Call SetSettings function
    // to change the settings.
    unsigned char Protocol;
    unsigned char Band;
    unsigned char Power;
```

```

    unsigned char ScanTime;
    unsigned char BeepOn;

    // unused
    unsigned char Reserved1;
    unsigned char Reserved2;

    // cannot be changed
    int MaxFreq = 0;
    int MinFreq = 0;
    int BaudRate = 0;
};

```

Parameters:

readerinfo: pointer to ReaderInfo structure.

Returns: 1 on success.

unsigned char SaveSettings(unsigned char* readerinfo)

Saves reader info. The ReaderInfo struct may be modified and passed to this function. Only the Protocol, Band, Power, ScanTime, BeepOn can change.

Parameters:

readerinfo: pointer to ReaderInfo structure.

Returns: 1 on success.

int Inventory(unsigned char filter)

Performs inventory with or without filter. The filter parameters may be set by calling Filter function prior to calling this function. If the return value is non-zero (positive), then the inventory items could be retried by using zero based index by calling GetResult function.

Parameters:

filter: 1 to perform filtering, otherwise pass 0.

Returns: Number of unique tags found. Returns 0, if no tags found.

unsigned char GetResult(unsigned char *scanresult, int index)

Gets the inventory item at index (zero based). If not found, returns 0. If found stores the scan data into scanresult array. ScanResult data structure is shown below.

```

struct ScanResult {

```

```

    unsigned char ant; // 1 byte
    char RSSI; // 1 byte
    unsigned char count; // 1 byte
    unsigned char epclen;
    unsigned char epc[12]; // 12 byte or 62 byte
};

```

Parameters:

scanresult: pointer to the ScanResult structure.

index: index of the inventory item.

Returns: 1 on success.

unsigned char GetTID(unsigned char* epc, unsigned char epclen, unsigned char* tid, unsigned char* tidlen)

Gets TID for the tag with given EPC.

Parameters:

epc: EPC code of the tag for which TID is requested.

epclen: length of EPC.

tid: an array to hold the TID. Provide an array of sufficient size.

tidlen: actual number of bytes copied into the tid array.

Returns: 1 if successful.

unsigned char GetTagInfo(unsigned char* tid, unsigned char* info)

Gets tag information for the tag ID. The info received has the following structure:

```

struct TagInfo {
    int type;
    int tidlen;
    unsigned char tid[64];
    char chip[16];
    int epclen;
    int userlen;
    int pwrlen;
};

```

Parameters:

tid: TID code of the tag for which TID is requested.

info: buffer to get the result returned.

Returns: 1, if successful.

unsigned char SetPassword(unsigned char* epc, unsigned char epclen, unsigned char* pwd, unsigned char pwrlen)

Sets password for the card with the given EPC.

Parameters:

epc: EPC code of the tag for which TID is requested.

epclen: length of EPC.

pwd: an array holding the password.

pwrlen: length of the password array. The length must be 4 bytes at least.

Returns: 1, if successful.

unsigned char SetKillPassword(unsigned char* epc, unsigned char epclen, unsigned char* kpwd, unsigned char kpwrklen)

Sets kill password for the card with the given EPC.

Parameters:

epc: EPC code of the tag for which TID is requested.

epclen: length of EPC.

kpwd: an array holding the password.

kpwrlen: length of the password array. The length must be 4 bytes at least.

Returns: 1, if successful.

void SetLastError(char* error)

Stores the last error.

Parameters:

error: an array to hold the error. Pass an array of sufficient length. 256 byte array recommended. The error is a C type string, terminated by a NULL character.

Returns: none.

unsigned char Auth(unsigned char* pwd, unsigned char pwrlen)

Sets the tag password to be used for all successive inventory and read/write operations.

Parameters:

pwd: an array containing password.

pwrlen: length of the password array. Minimum is 4 bytes (32 bits).

Returns: 1 if command was successful. If no card found, will return 0.

unsigned char WriteMemWord(unsigned char* epc, unsigned char epclen, unsigned char* data, unsigned char windex)

Writes the 2-byte word in the data to the Tag's User memory at word index windex.

Parameters:

epc: EPC of the tag.

epclen: number of bytes in EPC.

data: 2 byte array with data, MSB byte first followed by LSB byte.

windex: word index. Tags are indexed by word, 2 two bytes are written simultaneously.

Returns: 1, if successful.

unsigned char ReadMemWord(unsigned char* epc, unsigned char epclen, unsigned char* data, unsigned char windex)

Reads 2-byte word into data from Tag's User memory at word index windex.

Parameters:

epc: EPC of the tag.

epclen: number of bytes in EPC.

data: 2 byte array with data to be saved, MSB byte first followed by LSB byte.

windex: word index. Tags are indexed by word, 2 two bytes are written simultaneously.

Returns: 1, if successful.

unsigned char SetFilter(int maskAdrByte, int maskLenInByte, unsigned char* maskDataByte)

Sets Tag's EPC filtering to be used during inventory. Example: If there are tags with the following EPC:

1. ABCD1234FEDC5679
2. ABCD5679FEDC1234
3. FEDC1234ABCD5679

Then SetFilter(0, 2, [0xAB, 0xCD]) will return tags #1 and #2 upon inventory. SetFilter(2, 2, [0x12, 0x34]) will return tag #1 and #3. SetFilter(6, 2, [0x56, 0x78]). And if only a specific tag is required, the SetFilter(0, 8, [0xAB, 0xCD, 0x56, 0x79, 0xFE, 0xDC, 0x12, 0x34]) will return only #2.

This operation is very useful to search inventory of products with know EPC prefix or suffix.

Parameters:

maskAdrByte: Number of bytes from the beginning of EPC code.

maskLenInByte: Number of bytes in the mask byte.

maskDataByte: mask bytes of length provided in second parameter.

Returns: 1, if successful.

int TagType()

Returns the Tag type, usually the chip used. The number returned is an index to an array of known tag chips. This operation must be called after calling getTID(). Because, TID contains the tag's manufacturer information for most chips.

Parameters: none.

Returns: a non zero index. If zero is returned, then tag chip could not be determined.

unsigned char TagName(char* name)

Stores the tag's name identified by index returned by TagType().

Parameters:

name: an array to store the name. The array should at least be 64 byte. The array is C type NULL terminated string.

Returns: 1, if successful.

unsigned char WriteEpcWord(unsigned char* epc, unsigned char epclen, unsigned char* epcword, unsigned char winindex)

Writes the 2-byte EPC word at word index winindex. This function may be used if only a word is required to be changed in EPC.

Parameters:

epc: EPC of the tag.

epclen: number of bytes in EPC.

data: 2 byte array with EPC data, MSB byte first followed by LSB byte.

winindex: word index. Tags are indexed by word, 2 two bytes are written simultaneously.

Returns: 1, if successful.

unsigned char TagExists(unsigned char* epc, unsigned char epclen)

Checks if the tag with the given EPC is found in the field.

Parameters:

epc: EPC of the tag.

epclen: number of bytes in EPC.

Returns: 1, if tag found.

unsigned char SetGPO(unsigned char gpono)

Sets output of the GPIO to the value assigned. There are two GPIO outputs. Bit zero of gpono send output to GPO-0 and bit 1 sends to GPO-1. So, SetGPO(2) means, GPO-0 = 0 and GPO-1 = 1.

Parameters:

gpono: bit wise assignment of state per GPO output port.

Returns: 1, if successful.

unsigned char GetGPI(unsigned char gpino)

gets input from GPIO. There are two GPIO, GPI-0 and GPI-1. To get input from GPI-0, send gpino = 1, to get input from GPI-2, send gpino = 2. All other values are invalid.

Parameters:

gpino: GPI input filtering bit.

Returns: GPI input from the given port.

unsigned char SetQ(unsigned char Q)

Sets the Q parameter. For a small number of tags, set this to 5. The best value should be found by trial and error.

Parameters:

Q: Optimal Q value.

Returns: 1 on failure.

unsigned char SetSession(unsigned char sess)

Sets inventory session. Sessions range from 0 to 3. If there are other RFID reader around, each reader should use a different session so the inventory scan will not affect the other readers.

Parameters:

sess: session number between 0 and 3.

Returns: 1 on failure

Jence Uhf App


A Java application called UhfApp is provided with full source code. This application uses SWT (Standard Widget Toolkit) library for all its GUI frontend. SWT uses underlying OS'es native API to display the widgets and therefore the widgets get a native look. In addition, due to native calls, all hardware accelerations are handled by the OS itself. The application can be easily modified to run on Swing, but this is unnecessary. SWT library is a single jar file which

is available for all popular OSes (this includes Windows, Mac OSX, Linux, Raspbian, and more).

How to download and use the Application


This software application tool associates with our two products UHF Desktop Reader/Writer hardware 4210U and UHF Handheld reader 4211U. At first, you have to download the application file from our official website: <http://jence.com/web/>. In the search option of the website, type UHF reader and you will see both of our products in the suggestion. Click on any of this to go to the product page. In the product page, after expanding the 'show more' in the bottom, you will find the link for downloading the SDK. Click on this link to download the zip file of the application.

After the download, please unzip the folder. Then go to the demo folder. Inside the demo folder, there is an application file j4210u.exe. If you run this application file, two command prompt window will appear. Now connect the UHF hardware with the computer through USB cable and find the com port inside the device manager. Inside the jence UHF App window at first click on the refresh button, then the com port will appear in the port option, select the com port and finally click on the connect button to connect the software tool with the hardware.

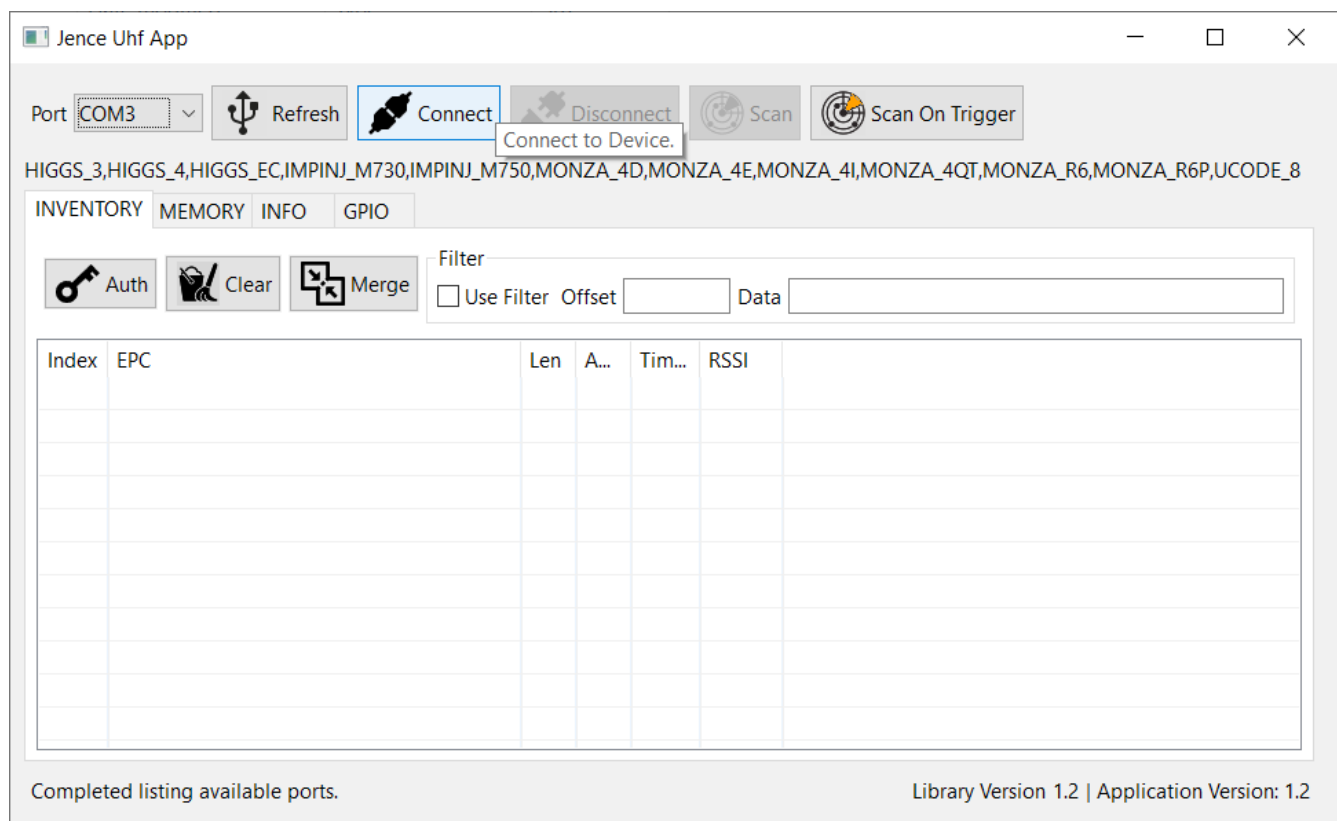


This UHF software tool can directly detect Ucode-8, Monza 4Q1, Monza R6P, Monza 4D, HIGGS 3, IMPINJ M730 and Monza R6 UHF RFID CHIPS. Apart from these chips, it can read other unknown chips as well. This software tool can detect several tags or cards at a time. If you use UHF Desktop hardware, in that case place UHF cards or tags on the hardware device and click on the Scan button inside the software. The software tool will scan the cards. If you use UHF Handheld reader, click on the Scan on Trigger button inside the software. Now if you press the button of the UHF Handheld reader, it will scan any UHF tags within the range of the reader.

Inventory Tab: When the software application scans cards or tags, we will see the EPC (Electronic Product Code) of those cards inside the inventory tab.

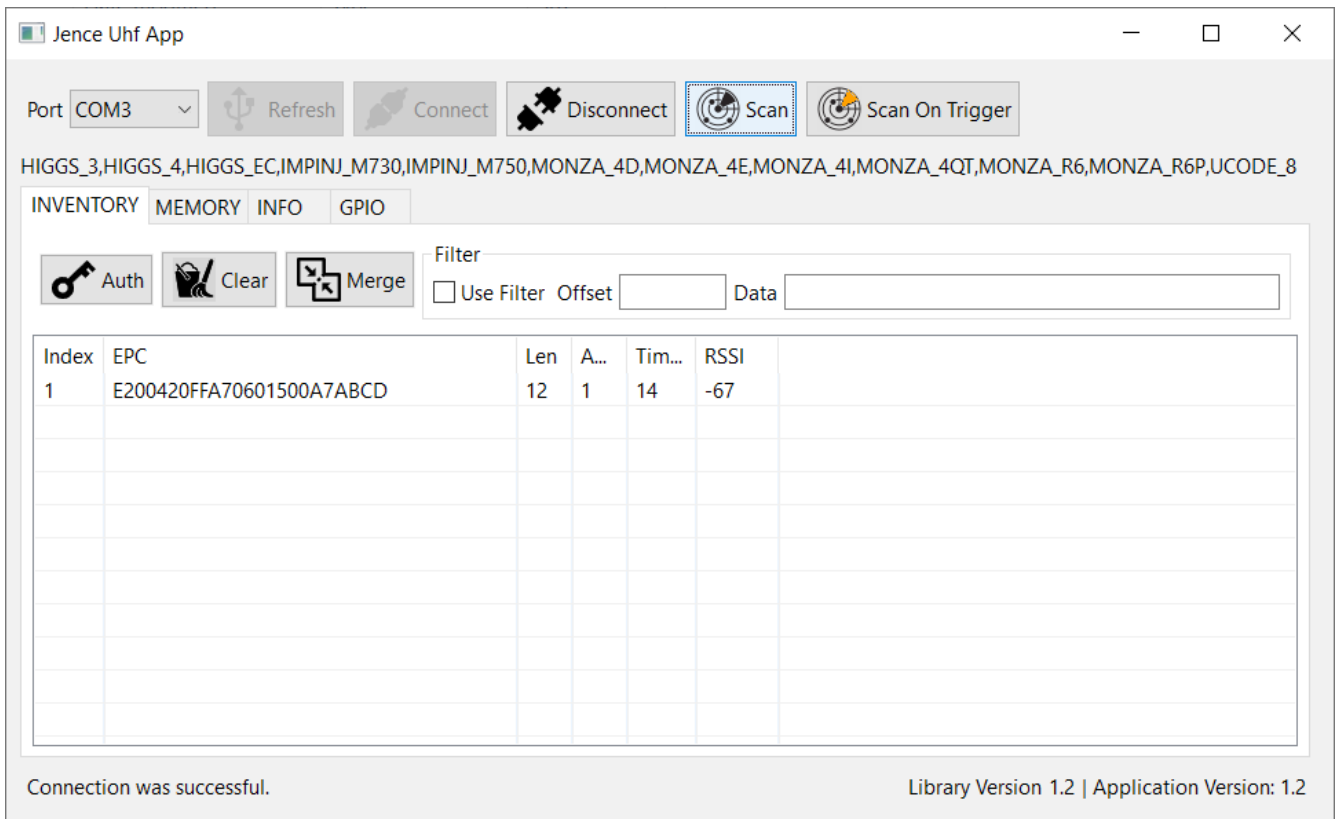

In this tab, there is merge option. If we click on this button, it will show the previous card information along with the new card information while scanning the new card.

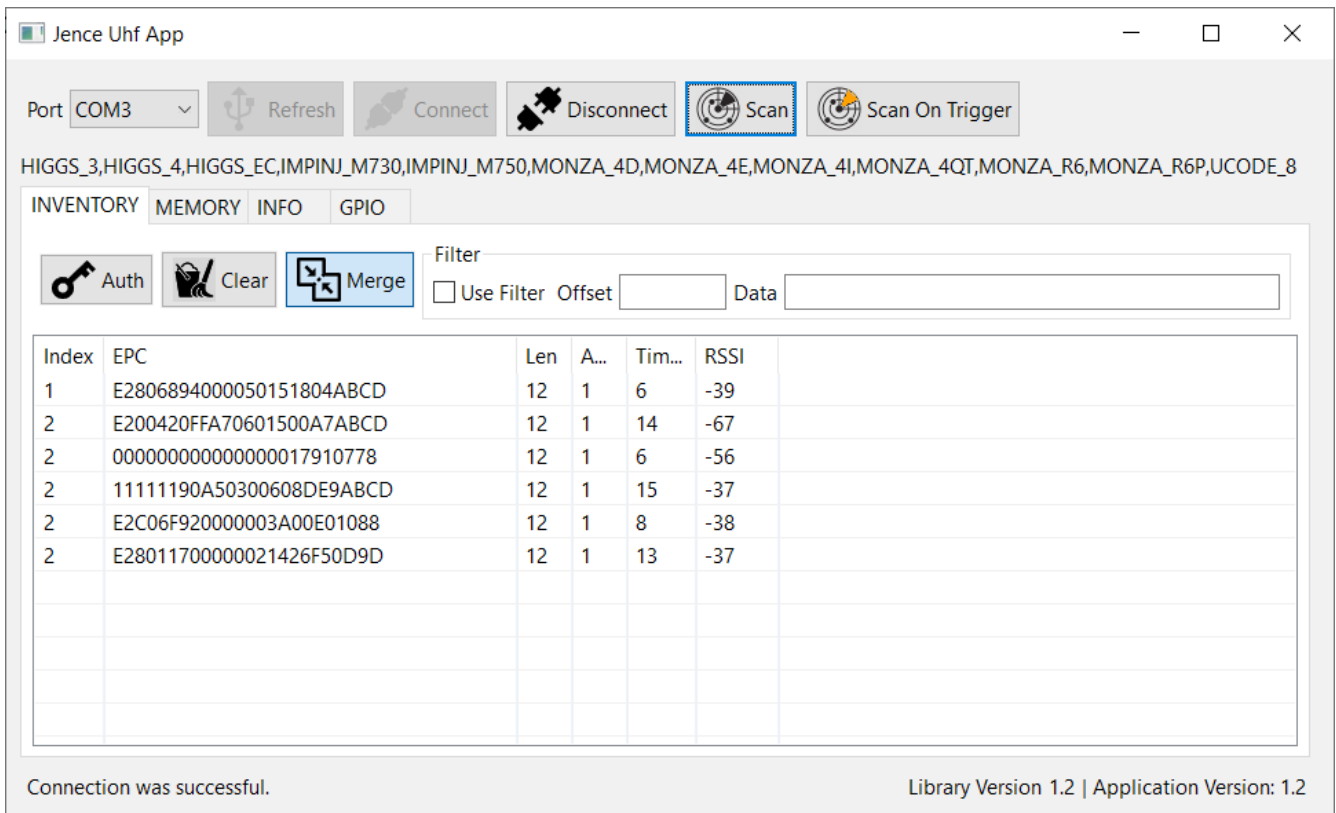

[illegible]

E280	6894	0000	5015	1804	ABCD	– EPC No						
0	1	2	3	4	5	6	7	8	9	10	11	– offset value

E200	420F	FA70	6015	00A7	ABCD	– EPC NO						
0	1	2	3	4	5	6	7	8	9	10	11	– offset value

Jence Uhf App

Port: COM3 Refresh Connect Disconnect Scan Scan On Trigger

HIGGS_3,HIGGS_4,HIGGS_EC,IMPINJ_M730,IMPINJ_M750,MONZA_4D,MONZA_4E,MONZA_4I,MONZA_4QT,MONZA_R6,MONZA_R6P,UCODE_8

INVENTORY MEMORY INFO GPIO

Auth Clear Merge Filter

☒ Use Filter Offset: 10 Data: ABCD

Index	EPC	Len	A...	Tim...	RSSI
1	E200420FFA70601500A7ABCD	12	1	3	-62
2	E2806894000050151804ABCD	12	1	12	-53
3	11111190A50300608DE9ABCD	12	1	4	-63
4	E2801170000002150E64ABCD	12	1	20	-44

Filter is used during scan. Library Version 1.2 | Application Version: 1.2

Here, 0,1,2,3,4,5,6,7,8,9,10,11 are offset values. Offset value must be 2 byte which means 4 hex values. As we should always consider only even offset and as ABCD value is in 10 11 offset where 10 is the even offset, we will write 10 in offset option and we will write ABCD in data option. We must check Use Filter option. Now if we search with UHF Handheld reader, we will find tags with this ABCD suffix. It is very useful to find tags with similar prefix, suffix or values in large inventories.

Memory tab: Now if we double click on the EPC no while card is within the range of UHF hardware and go to the memory tab, we will see the inside content of the card, such as chip type, total memory, PWD size, EPC size, TID size and user size. The numbers marked with yellow colour are in bit format and others are in byte format.

Jence Uhf App

Port: COM3 [Refresh] [Connect] [Disconnect] [Scan] [Scan On Trigger]

HIGGS_3,HIGGS_4,HIGGS_EC,IMPINJ_M730,IMPINJ_M750,MONZA_4D,MONZA_4E,MONZA_4I,MONZA_4QT,MONZA_R6,MONZA_R6P,UCODE_8

INVENTORY MEMORY INFO GPIO

Operations: [Refresh] [Write] [Clean] [Auth] [Exists]

Chip Type: MONZA_R6P Total Memory: 40 320 PWD Size: 4 32

EPC Size: 12 96 TID Size: 12 96 Total Memory in Bits: 32

Memory	Word 0	Word 1	Word 2	Word 3	Word 4	Word 5	Word 6	Word 7
EPC	0000	0000	0000	0000	1791	0778		
TID	E280	1170	2000	036F	B567	0941		
USER[0..7]	E280	0000						

Memory Load completed. Library Version 1.2 | Application Version: 1.2

We can alter the EPC and user data here except for TID as it is read only. After changing the data, we have to click on Write button to save the data.

Jence Uhf App

Port: COM3 [Refresh] [Connect] [Disconnect] [Scan] [Scan On Trigger]

HIGGS_3,HIGGS_4,HIGGS_EC,IMPINJ_M730,IMPINJ_M750,MONZA_4D,MONZA_4E,MONZA_4I,MONZA_4QT,MONZA_R6,MONZA_R6P,UCODE_8

INVENTORY MEMORY INFO GPIO

Operations: [Refresh] [Write] [Clean] [Auth] [Exists]


Chip Type: MONZA_R6P Total Memory: 40 320 PWD Size: 4 32

EPC Size: 12 96 TID Size: 12 96 USER Size: 4 32


Memory	Word 0	Word 1	Word 2	Word 3	Word 4	Word 5	Word 6	Word 7
EPC	0000	0000	0000	0000	1791	ABCD		
TID	E280	1170	2000	036F	B567	0941		
USER[0..7]	E280	0000						

Writing to Tag completed. Library Version 1.2 | Application Version: 1.2


Now if we scan the card, we will see the EPC no with altered value in it.

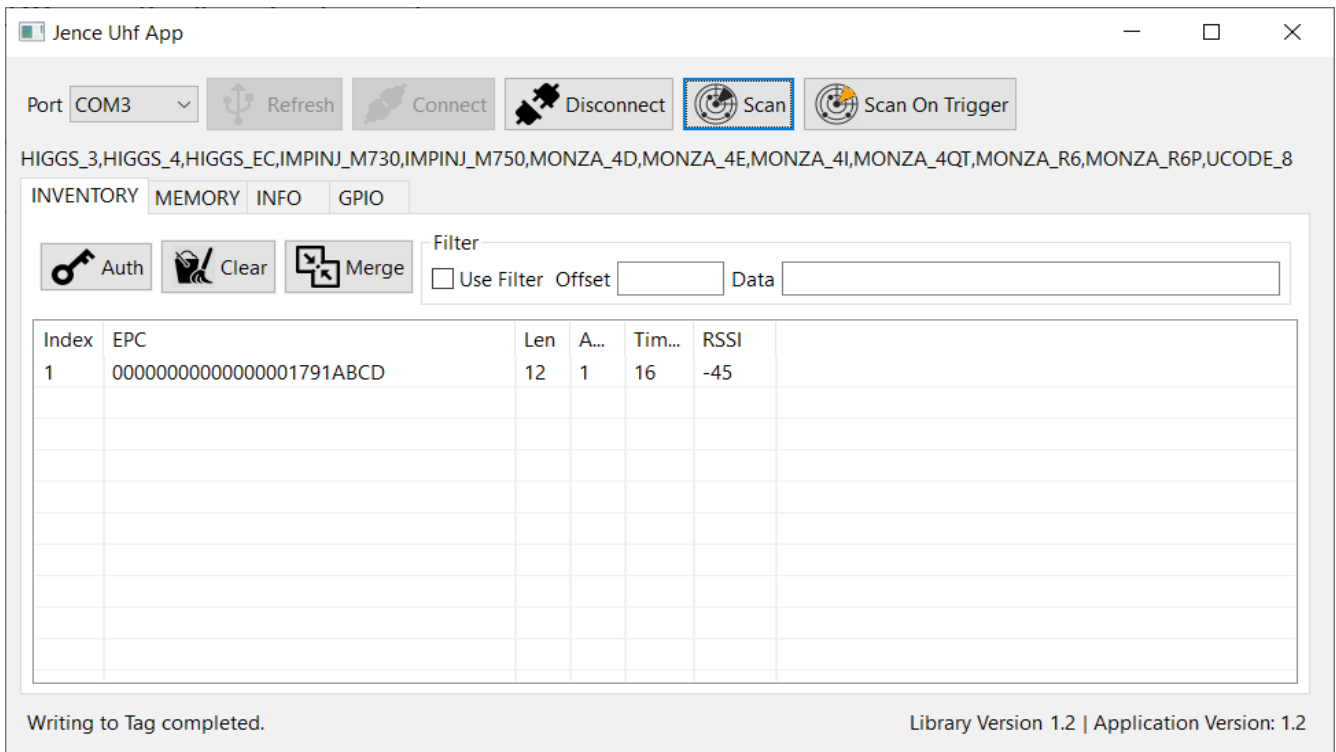


In this way, we can give similar suffix or prefix or middle value to several tags to search them promptly. There is an Exists button inside the memory tab.

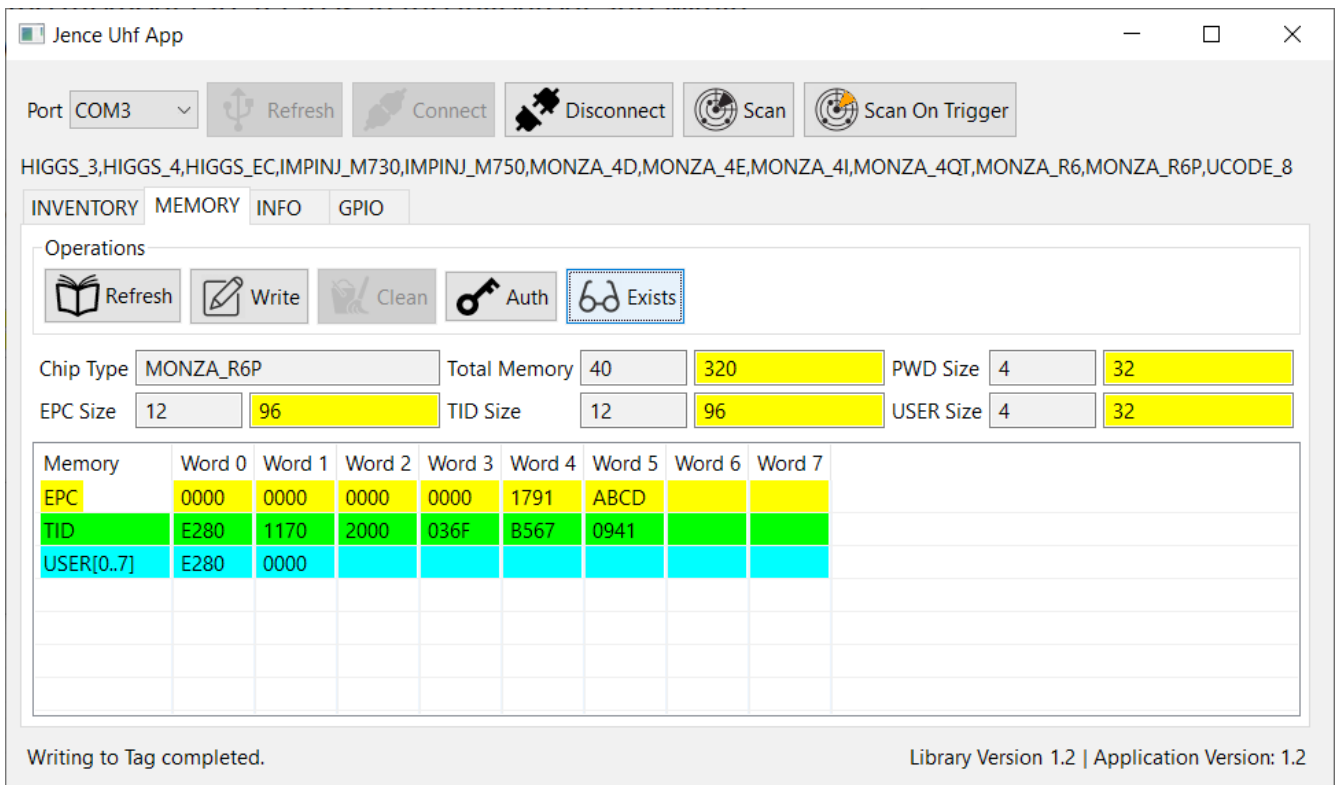

If tag is in the inventory and within the range of UHF Handheld reader and if we click on this button, it will show the pop up message “Tag found in the inventory”.

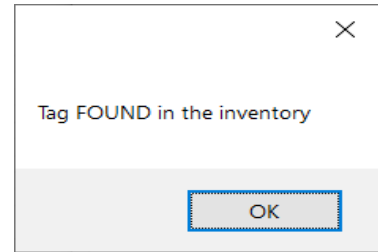

If tag is not in the inventory or not within the range of UHF reader, it will show the message “ Tag not found near the reader”.

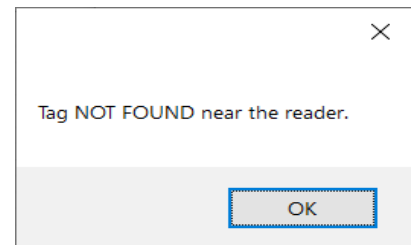

Info tab: In this info tab, we will get the information of the UHF reader, such as its serial no, max frequency, version, min frequency, baud rate, scan time etc. There is Beep on option inside inside the tab. If we uncheck this option during scan, reader will not produce any sound and if we check it during scan, reader will produce beep sound. During check and uncheck, we must press on Write button to save the setting.

The screenshot shows the "Jence Uhf App" window. At the top, there's a header bar with a title and standard window controls. Below it is a toolbar with buttons for "Port" (set to COM3), "Refresh", "Connect", "Disconnect", "Scan", and "Scan On Trigger". A status bar at the top lists various tag types: HIGGS_3, HIGGS_4, HIGGS_EC, IMPINJ_M730, IMPINJ_M750, MONZA_4D, MONZA_4E, MONZA_4I, MONZA_4QT, MONZA_R6, MONZA_R6P, UCODE_8. Below the toolbar are four tabs: "INVENTORY", "MEMORY", "INFO" (which is selected), and "GPIO". The "INFO" tab contains two columns of settings, each with a text input field and a "Write" button. The settings include: Serial No (276828705), Version (3.30), Max Freq (927250), Min Freq (902750), Antenna (1), ComAdr (0), Reader Type (16), Protocol (108), Band (USA), Baud Rate (57600), Power (dB) (25), and Scan Time (ms) (300). At the bottom of the settings, there is a checkbox for "Beep ON" which is currently checked. A "Write" button is located below the "Beep ON" checkbox. At the very bottom of the window, a status bar shows "Settings loaded." on the left and "Library Version 1.2 | Application Version: 1.2" on the right.

Optimal Setup

The reason why some tags are read and others not is due to the RSSI (tag sensitivity). If you put tags one over the other, the antenna of the bottom tag obstructs the antenna of the top tags. Therefore, to always read well, spread the tags so the antennas do not block. In addition, the environmental issue plays a role due to the fact that the tags do not go through the same reflection path than the previous scan because of collision avoidance protocol. Typically, RFID reader software is designed to read continuously to read all surrounding tags. Therefore, you can press the scan button continuously or modify the java code so the scan button scans more than one time. You may also increase the Scan Time to allow more time to read tags.

This is a standard behavior of any UHF RFID reader in which the first iteration may not find all surrounding tags, but in the second and successive iteration it will find the tags. This is the reason why there is Merge button in the demo software. This keeps record of the previously detected tag.

COLLISION

UHF RFID have this behavior due to Collision in which after a Collision the tag stops transmitting for a short moment. This is not a problem with the device, instead this is how the UHF RFID protocol work. The rule is, if the tag could not be found in the first iteration, it will be found in successive iterations. Eventually all surrounding tags would be found.

In addition, the tag itself could be the cause of the problem. In your case, it does not seem that the tag is an issue because it is found eventually.

Use the Merge button. Right now the Scan button only scan once. But this is a demo software, so we didn't use multiple scans with a single button press. In a professionally coded software, scans should be done multiple times. You can modify the software to scan several time with single press or just use the Merge option.


With that said, we will add option in our future demo that will have the option to set number of scans per Scan button press. Our next software release will have this feature.

ANTENNA LOBE

With the reader on the table, draw a 1 meter diameter circle reader as shown below. This is the sensitive area of the reader. If the tag is within the circle, most likely the reader will catch it in the first scan. Otherwise, it may get it in successive scan or not at all if it is way out of the cone.

LONG RANGE

If you need long range, use tags with bigger antenna. Make sure that your desk is not made of Glass. Glass is a high dielectric material which significantly affects the reader's impedance matching as well as the tag's impedance. Having Glass in close proximity will reduce the read range. If you have Glass desk, use a 1" thick book to place your reader and tags. This is shown below.

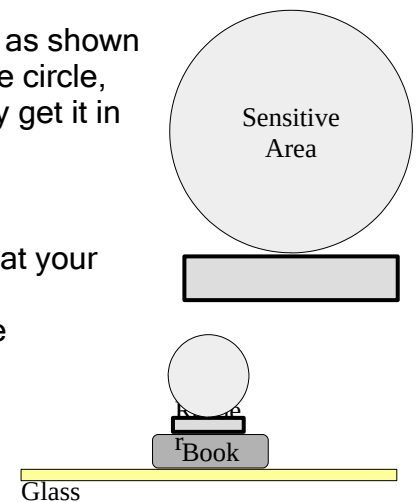

Setup

Here is detailed description on how to setup other Operating Systems. In the following description we have shown how to install other software, like mysql database server, git-cola, tomcat, phpmyadmin, codeblocks, etc. These are not strictly necessary. But, if you are planning to build java based Servlet which could access database, you need both tomcat and mysql. If can skip installation of these software for now but install them anytime in the future.

Raspberry PI

Raspberry PI Raspbian image 64-bit may be downloaded from the following link

<https://www.raspberrypi.com/software/operating-systems/>

Choose a 64-bit image.

Once the image is downloaded, burn the image in a micro SD card, then boot. For details on how to burn an image into SD card visit elsewhere. Boot the Banana PI from the image. If the image successfully boots, you will see the Raspbian desktop with background image and the top line containing Raspbian icon and following icons: browser, folder, terminal. Click on the Terminal icon to open a terminal window. NOTE: The default username is **pi** and password is **raspberry**

Installation

We will install the following for software development. First, you need to install Gparted to resize the partition to atleast 8GB.

```
sudo apt-get update
sudo apt-get install gparted
```

Run Gparted and resize the partition to 8GB or higher. Then execute all the following commands.

Download default Java Development Kit (JDK). There should be java already installed. Check if java is installed by typing:

```
java -version
```

This should show you the version of that is installed, otherwise an error message will be displayed if no java found.

```
sudo apt install default-jdk
```

Install Eclipse

```
sudo apt-get install eclipse
```

If the above command fails, install Eclipse manually as follows:

```
wget https://www.eclipse.org/downloads/download.php?file=/technology/epp/
downloads/release/2020-12/R/eclipse-java-2020-12-R-linux-gtk-aarch64.tar.gz
```

Unzip the .tar.gz file and the eclipse directory will contain the eclipse executable. Just double click the file and unzip the file in default directory.

Install Mysql Server. Maria DB is open source version of Mysql.

```
sudo apt-get install mariadb-server
```

Install CodeBlocks (For C/C++ development only)

```
sudo apt-get install codeblocks
```

Install Tomcat Server (For Java server development only)

```
sudo apt-get install tomcat9
```

Install PhpMyAdmin (For database development only)

```
sudo apt-get install phpmyadmin
```

Change Mysql root password from blank to something else

```
sudo mysql -u root -p
```

Password is blank, simply press enter.

In mysql command prompt type the following:

```
use mysql;
```

```
create user 'soacom'@'localhost' identified by 'soacom';
```

```
grant all on *.* to soacom@localhost;
```

{The following line will change the root password. Default password is blank}

```
alter user 'root'@'localhost' identified by 'soacom';
```

Note that we created a user **soacom** and set the password to **soacom**.

Open browser, type : <http://localhost/phpmyadmin>

User: soacom

Password: soacom

{The default phpmyadmin installation does not allow root access.}

If you use Git as source control, install Git Cola, a graphical Git utility.

```
sudo apt-get install git-cola
```

Now verify Processor Architecture:

```
getconf LONG_BIT
```

Get OS Info:

```
cat /etc/os-release
```

Get System Info:

```
cat /proc/cpuinfo
```

```
uname -m
```

Banana PI

Banana PI image may be downloaded from the following link

https://wiki.banana-pi.org/Banana_Pi_BPI-M4

This is a Raspbian image.

Other Banana PI images can be found from here:

<https://download.banana-pi.dev/d/ca025d76afd448aabc63/?p=%2FImages%2FBPI-M4%2Flinux&mode=list>

Any image can be used and the setup procedure is the same.

Once the image is downloaded, burn the image in a micro SD card, then boot. For details on how to burn an image into SD card visit elsewhere. Boot the Banana PI from the image. If the

image successfully boots, you will see the Raspbian desktop with background image and the top line containing Raspbian icon and following icons: browser, folder, terminal. Click on the Terminal icon to open a terminal window. NOTE: The default username is **pi** and password is **raspberrypi**

Installation

We will install the following for software development. First, you need to install Gparted to resize the partition to atleast 8GB.

```
sudo apt-get update
sudo apt-get install gparted
```

Run Gparted and resize the partition to 8GB or higher. Then execute all the following commands.

Download default Java Development Kit (JDK)

```
sudo apt install default-jdk
```

Install Eclipse

```
sudo apt-get install eclipse
```

Install Mysql Server

```
sudo apt-get install mysql-server
```

Install CodeBlocks (For C/C++ development only)

```
sudo apt-get install codeblocks
```

Install Tomcat Server (For Java server development only)

```
sudo apt-get install tomcat8
```

Install PhpMyAdmin (For database development only)

```
sudo apt-get install phpmyadmin
```

Change Mysql root password from blank to something else

```
sudo mysql -u root -p
```

Password is blank, simply press enter.

In mysql command prompt type the following:

```
use mysql;
create user 'soacom'@'localhost' identified by 'soacom';
grant all on *.* to soacom@localhost;
{The following line will change the root password. Default password is blank}
alter user 'root'@'localhost' identified by 'soacom';
```

Note that we created a user **soacom** and set the password to **soacom**.

Open browser, type : <http://localhost/phpmyadmin>

User: soacom

Password: soacom

{The default phpmyadmin installation does not allow root access.}

If you use Git as source control, install Git Cola, a graphical Git utility.

```
sudo apt-get install git-cola
```

Now verify Processor Architecture:

```
getconf LONG_BIT
```

Get OS Info:

```
cat /etc/os-release
```

Get System Info:

```
cat /proc/cpuinfo
```

```
uname -m
```

Orange PI

Orange PI Ubuntu image may be downloaded from the following link

<https://drive.google.com/drive/folders/1KzyzyByev-fpZat7yvgYz1omOqFFqt1k>

For other images, visit <http://www.orange-pi.org/html/serviceAndSupport/index.html> then choose the hardware. The OS download options would be in found in the page. Once the image is downloaded, burn the image in a micro SD card, then boot. For details on how to burn an image into SD card visit elsewhere. Boot the Orange PI from the image. If the image successfully boots, you will see the Ubuntu desktop with Orange Pi logo and the top line containing Ubuntu Application menu. NOTE: The default username is **orange-pi** and password is **orange-pi**

Installation

We will install the following for software development. First, you need to install Gparted to resize the partition to atleast 8GB.

```
sudo apt-get update
sudo apt-get install gparted
```

Run Gparted and resize the partition to 8GB or higher. Then execute all the following commands.

Download default Java Development Kit (JDK)

```
sudo apt install default-jdk
```

Install Eclipse

```
wget https://www.eclipse.org/downloads/download.php?file=/technology/epp/
downloads/release/2020-12/R/eclipse-java-2020-12-R-linux-gtk-aarch64.tar.gz
```

Upzip the .tar.gz file and the eclipse directory will contain the eclipse executable.

Install Mysql Server

```
sudo apt-get install mysql-server
```

Install CodeBlocks (For C/C++ development only)

```
sudo apt-get install codeblocks
```

Install Tomcat Server (For Java server development only)

```
sudo apt-get install tomcat8
```

Install PhpMyAdmin (For database development only)

```
sudo apt-get install phpmyadmin
```

Change Mysql root password from blank to something else

```
sudo mysql -u root -p
```

Password is blank, simply press enter.

In mysql command prompt type the following:

```
use mysql;
```

```
create user 'soacom'@'localhost' identified by 'soacom';
```

```
grant all on *.* to soacom@localhost;
```

{The following line will change the root password. Default password is blank}

```
alter user 'root'@'localhost' identified by 'soacom';
```

Note that we created a user **soacom** and set the password to **soacom**.

Open browser, type : <http://localhost/phpmyadmin>

User: soacom

Password: soacom

{The default phpmyadmin installation does not allow root access.}

If you use Git as source control, install Git Cola, a graphical Git utility.

```
sudo apt-get install git-cola
```

Now verify Processor Architecture:

```
getconf LONG_BIT
```

Get OS Info:

```
cat /etc/os-release
```

Get System Info:

```
cat /proc/cpuinfo
```

```
uname -m
```

BeagleBone

BeagleBone Debian image may be downloaded from the following link

<https://beagleboard.org/getting-started>

Install the image with desktop so you can use Eclipse and the browser in beaglebone. Once the image is downloaded, burn the image in a micro SD card, then boot. For details on how to burn an image into SD card visit elsewhere. Boot the Orange PI from the image. If the image successfully boots, you will see the Ubuntu desktop with Orange Pi logo and the top line

containing Ubuntu Application menu. NOTE: The default username is **debian** and password is **temppwd**

The **root** user have password **root**. In some distribution the password is blank (no password).

NOTE: Beaglebone Green does not have HDMI port. To display you need to purchase the SeedStudio BeagleBone HDMI Cape and the firmware to use it, which is available from here:

<https://debian.beagleboard.org/images/bone-debian-8.7-lxqt-4gb-armhf-2017-03-19-4gb.img.xz>

We recommend that you use BeagleBone Black, which has built-in hdmi.

PocketBeagle

PocketBeagle does not have a dedicated Ethernet port, so you need to connect to the Internet through USB networking along with Internet Connection Sharing. The detailed setup guide is described by the following blogs:

Windows Host:

<http://ofitselfso.com/BeagleNotes/HowToConnectPocketBeagleToTheInternetViaUSB.php>

Mac Host: <https://beagleboard.org/p/hologram/sharing-internet-with-the-pocketbeagle-on-osx-cd62b2>

Linux Host: <https://www.elementzonline.com/blog/Sharing-Internet-using-Network-Over-USB-in-PocketBeagle>

After connection sharing try using

```
ssh debian@192.168.7.2 (for Windows)
```

```
ssh debian@192.168.6.2 (for Mac)
```

```
ssh debian@beaglebone.local (for any)
```

```
sudo
```

One of them should work.

Installation

We will install the following for software development. First, you need to install Gparted to resize the partition to atleast 8GB.

```
sudo apt-get update  
sudo apt-get install gparted
```

Run Gparted and resize the partition to 8GB or higher. Then execute all the following commands.

Download default Java Development Kit (JDK)

```
sudo apt install default-jdk
```

Install Eclipse

```
wget https://www.eclipse.org/downloads/download.php?file=/technology/epp/  
downloads/release/2020-12/R/eclipse-java-2020-12-R-linux-gtk-aarch64.tar.gz  
Upzip the .tar.gz file and the eclipse directory will contain the eclipse executable.
```

Install Mysql Server

```
sudo apt-get install mysql-server
```


if mysql server is not found, then type:

```
sudo apt-get install mariadb-server
```

Install CodeBlocks (For C/C++ development only)

```
sudo apt-get install codeblocks
```

Install Tomcat Server (For Java server development only)

```
sudo apt-get install tomcat8
```

Install PhpMyAdmin (For database development only)

```
sudo apt-get install phpmyadmin
```

Change Mysql root password from blank to something else

```
sudo mysql -u root -p
```

Password is blank, simply press enter.

In mysql command prompt type the following:

```
use mysql;
```

```
create user 'soacom'@'localhost' identified by 'soacom';
```

```
grant all on *.* to soacom@localhost;
```

{The following line will change the root password. Default password is blank}

```
alter user 'root'@'localhost' identified by 'soacom';
```

Note that we created a user **soacom** and set the password to **soacom**.

Open browser, type : <http://localhost/phpmyadmin>

User: soacom

Password: soacom

{The default phpmyadmin installation does not allow root access.}

If you use Git as source control, install Git Cola, a graphical Git utility.

```
sudo apt-get install git-cola
```

Now verify Processor Architecture:

```
getconf LONG_BIT
```

Get OS Info:

```
cat /etc/os-release
```

Get System Info:

```
cat /proc/cpuinfo
```

```
uname -m
```

Displaying Graphics on PC

You can display the X Windows graphics on your PC. Install Cygwin from <https://www.cygwin.com> and make sure to choose to install X11 and its components. Finish the installation and then go to your Windows Search menu and type "xwin". Click on the XWin Server icon. You will see XDG Menu icon. Click on it and go to System Tools → Xterm. Inside Xterm window type:

ssh -XY debian@192.168.7.2

Default password is **temppwd**. Now all your beaglebone graphical display will appear on your PC.

BeagleBone AI-64

The process to setup the AI-64 is similar to beagle bone. AI-64 can be connected to a monitor and every thing can be done on the monitor. Follow the same steps like Beagle Bone. You do not need to run Gparted to extend the partition as BB AI-64 uses the entire 16GB emmc for linux.

Mac OS X

Mac OS X on the Intel platform is replaced by M2 processor. Apple will gradually remove their support on Intel Macs. There is a version of the demo that should run on Intel Mac, but it will no longer be supported in future. Only Mac (Aarch64) macs will be supported. Later generation Mac does not need drivers for USB serial devices.

Troubleshooting

1. Could not connect to device.

A. Make sure that the COM port number (for Windows) or TTY (for Linux and Mac OSX) appear when the device is connected. If the serial port is not recognized, then uninstall and then reinstall the driver. In some cases, you may need to reboot the PC after driver installation. The j4210 driver is not in path.

2. Could not detect type of card.

A. If card type is not detected, then the card may be password protected. In this case, the user may programmatically set the card type.

3. Could not perform inventory.

A. Possibly there were no tag on the device. If there are tags, make sure that they are UHF RFID tags. If still could not detect tag, then move the tags to the center of the reader then try again.

4. Not all tags are detected in the first scan.

A. Read through Optimal Setup for detailed discussion on this topic.

Driver Version History

Version 1.8

Added support of Raspberry PI, Orange PI, Banana PI, BeagleBone, Mac OSX Intel. Added support for new hardware revision.

Version 1.7

Added functions SetQ and SetSession.

Version 1.6

Linux shared library and GUI modification and .app creation.

Version 1.5

MAC OSX GUI modification and .app creation.

Version 1.4

MAC OSX support implemented completely.

Version 1.3

GetSettings function bug fix. Initial coding of Mac OSX driver.

Version 1.2

Thingmagic Nano integration.

Version 1.1

Auto detection support added to MONZA_4QT, UCODE_8, MONZA_R6, MONZA_R6P, MONZA_4I, IMPINJ_M730, IMPINJ_M750.

Version 1.0

Initial version. Auto detection support added to HIGGS_3, HIGGS_4, HIGGS_EC, MONZA_4D, MONZA_4E, ICODE_7, ICODE_DNA, EM4423.

For questions, contact Jence.

JENCE

<http://www.jence.com>

Email: jence@jence.com