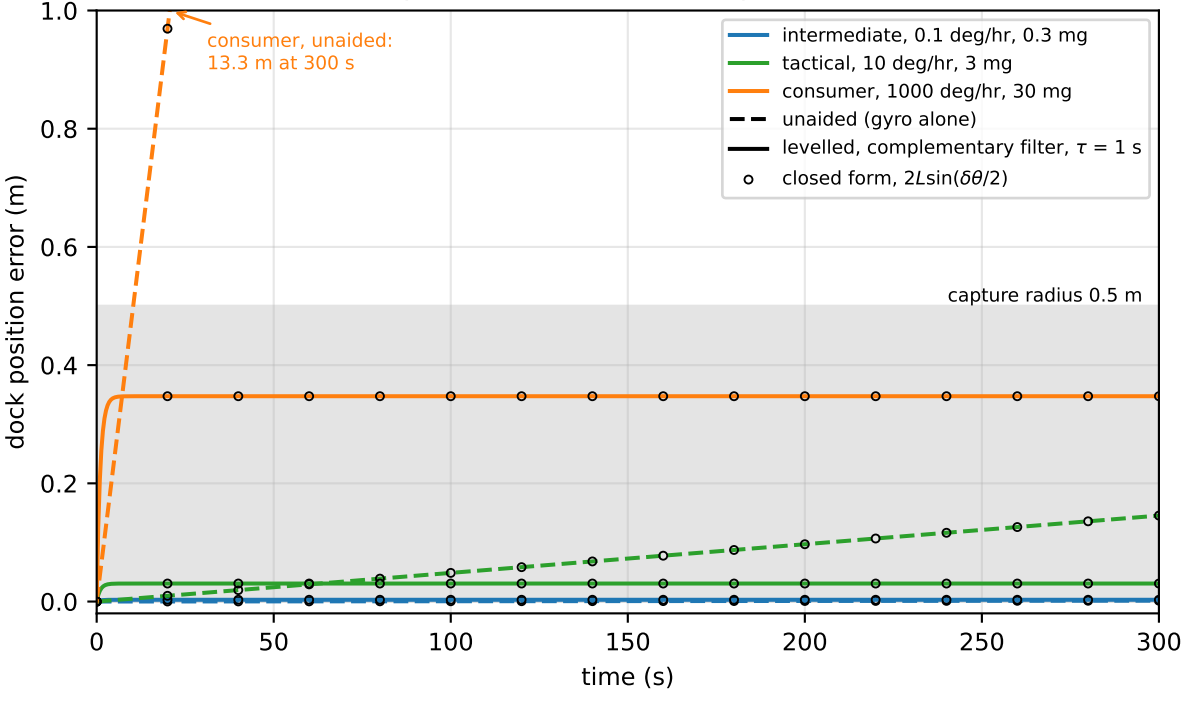
cable pseudo-measurement, eq (3), L = 10 m
consumer, unaided:
13.3 m at 300 s
intermediate, 0.1 deg/hr, 0.3 mg
tactical, 10 deg/hr, 3 mg
consumer, 1000 deg/hr, 30 mg
unaided (gyro alone)
levelled, complementary filter, τ = 1 s
closed form, 2Lsin(δθ/2)
capture radius 0.5 m
dock position error (m)
time (s)
0.0
0.2
0.4
0.6
0.8
1.0
0
50
100
150
200
250
300