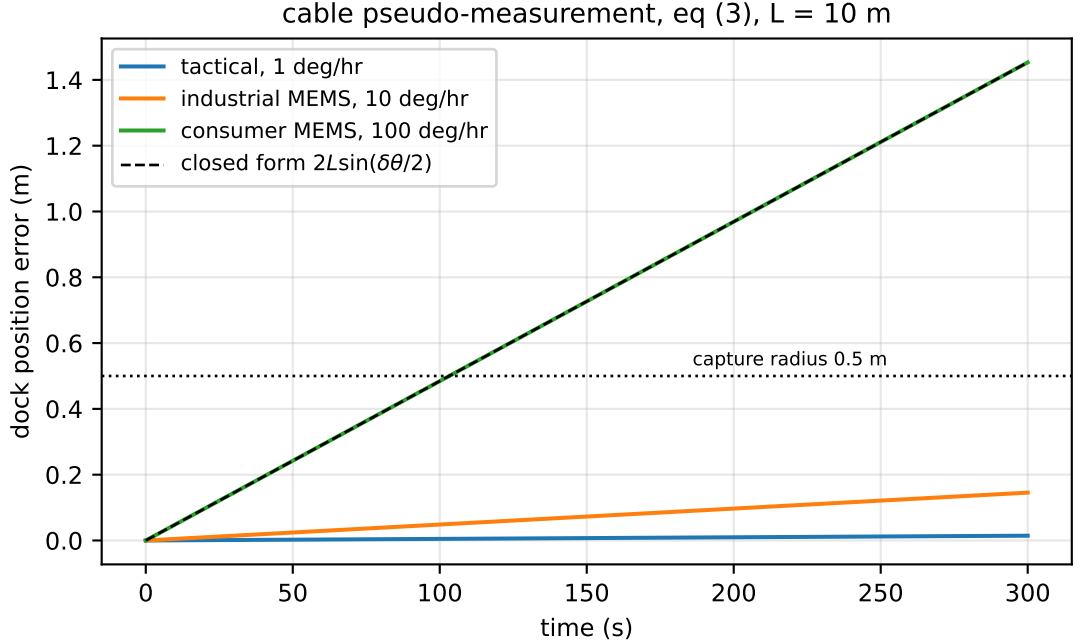
cable pseudo-measurement, eq (3), L = 10 m
tactical, 1 deg/hr
industrial MEMS, 10 deg/hr
consumer MEMS, 100 deg/hr
closed form 2Lsin(δθ/2)
capture radius 0.5 m
dock position error (m)
time (s)
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
0
50
100
150
200
250
300