





SURGE SHORETM
POWERTECH LLP

POWERING INDUSTRY
Driving Performance

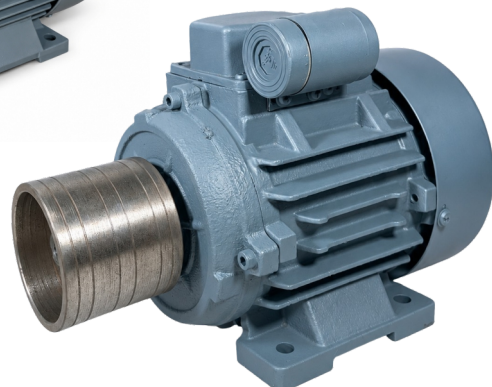

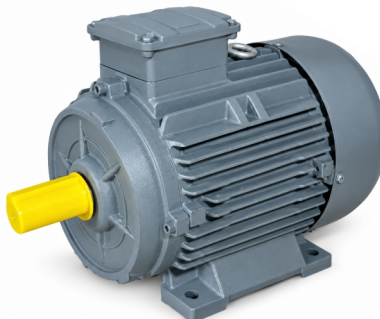

SURGE SHORETM
POWERTECH LLP

07+

Years Of Experience

20+

Employees

125+

Clients

We believe that
Innovation is the driving force
behind progress.

Since 2020...

Surge Shore is a leading manufacturer of high-quality Pumps and Motors. With a legacy of excellence spanning Over 06 Years, we have established Ourselves as a trusted name in the industry. Our commitment to innovation, precision engineering, and customer satisfaction has made us a preferred choice for businesses across various sectors.

Quality and Certifications

Surge Shore is committed to delivering motors of the highest quality. We adhere to international quality standards and hold certifications to demonstrate Our commitment to excellence.



Vision

We believe that innovation is the driving force behind progress, We are dedicated to pushing the boundaries of what's possible, continually seeking new solutions, and embracing change with open arms.



Mission

Our mission is to design and produce the most efficient & reliable 1 Phase & 3 Phase Induction motors in the industry. We are dedicated to driving technological advancements, promoting sustainability & serving unique needs of clients.

Our Product Range



Induction Motors
(C.I. Body)



Induction Motors
(Aluminum Body)



Diamond
Special Motors



Coolant Pumps



Self Priming Pumps

Industries We Served



Manufacturing



Agriculture



HVAC



Water Treatment



Oil and Gas



Food processing



Renewable Energy



Heat Treatment



3-Phase

INDUCTION MOTORS (C.I. Body)



1-Phase

3-Phase


Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Starting Current(%)	Efficiency	Power Factor
0.37	0.5	71	1400	1.15	210	320	72.7	0.65
0.55	0.75	80	1410	1.35	205	420	77.1	0.74
0.75	1	80	1415	1.9	210	430	79.6	0.73
1.1	1.5	90S	1410	2.5	210	455	81.4	0.81
1.5	2	90L	1420	3.2	215	460	82.8	0.82
2.2	3	100L	1425	4.7	200	490	84.3	0.79
3.7	5	112M	1435	7.5	210	540	86.3	0.81
5.5	7.5	132S	1450	10.8	160	500	83.9	0.85
7.5	10	132M	1450	14.3	165	510	85.33	0.86

1-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Starting Current(%)	Efficiency	Power Factor	Running Capacitor	Starting Capacitor
0.18	0.25	71	1450	2	270	475	63	0.8	15	-
0.37	0.5	80	1440	3.4	275	500	65	0.79	15	80-100
0.37	0.5	90S	1445	5	300	500	65	0.79	15	80-100
0.75	1	90S	1450	6.7	250	475	72	0.75	15	100-120
0.75	1	100L	1450	7	275	475	72	0.75	8	120-150
1.1	1.5	90L	1455	7.8	240	525	75	0.85	25	150-200
1.1	1.5	100M	1455	8	255	530	75	0.85	25	150-200
1.5	2	100L	1460	9.1	250	500	79	0.91 91	30	200-250
1.5	2	112M	1460	9.1	255	500	79	0.90	36	200-250
2.2	3	112M	1460	12.5	275	550	81	0.95	30+30	200-250

FEATURES

CI Casting body.
 High starting torque.
 CRNO. electrical grade stator.
 Aluminum terminal box.
 High quality pre-packed shielded bearing.
 Motor shaft are made of ENBE steel.
 High quality copper with 'F' class insulation.

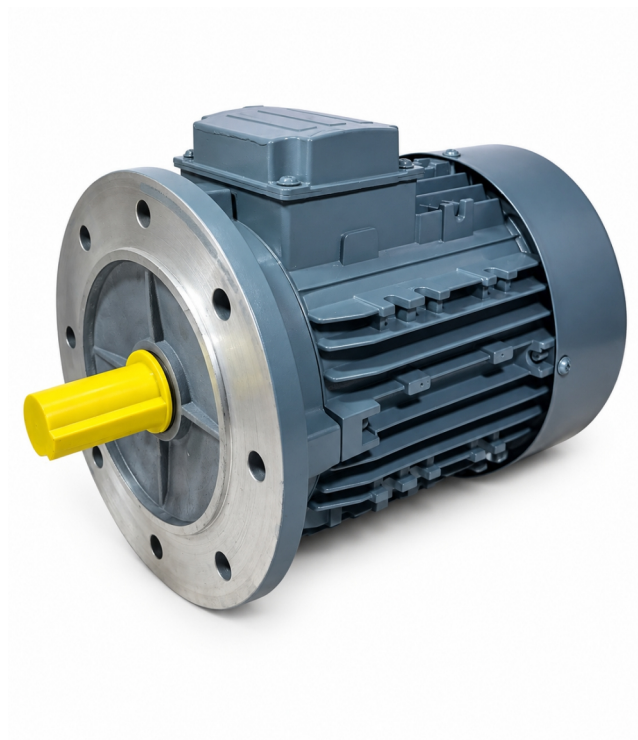

3-Phase


INDUCTION MOTORS (Aluminium Body)

1-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Starting Current(%)	Efficiency	Power Factor
0.18	0.25	63	1365	0.8	220	280	55.7	0.64
0.37	0.5	71	1400	1.15	210	320	72.7	0.65
0.55	0.75	80	1410	1.35	205	420	77.1	0.74
0.75	1	80	1415	1.9	210	430	79.6	0.73
1.1	1.5	90S	1410	2.5	210	455	81.4	0.81
1.5	2	90L	1420	3.2	215	460	82.8	0.82
2.2	3	100L	1425	4.7	200	490	84.3	0.79

FEATURES

Aluminum body for light weight.
High starting torque.
CANO. electrical grade stator.
Aluminum terminal box.
High quality pre-packed shielded bearing.
Motor shaft are made of EN8E steel.
High quality copper with 'F' class insulation.
www.surgeshorepowertech.com

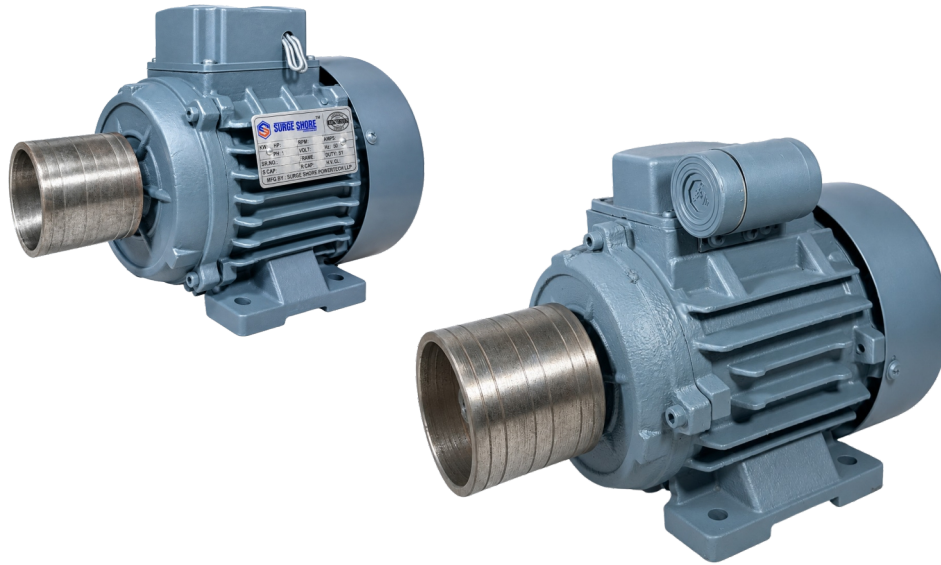

3-Phase


DIMOND SPECIAL MOTORS

3-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Efficiency	Power Factor
0.18	0.25	71	2790	0.79	200	60.4	0.49
0.24	0.33	80	2815	0.84	210	64.8	0.54
0.37	0.5	80	2840	0.90	225	73.8	0.84


1-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Efficiency	Power Factor	Running Capacitor
0.18	0.25	71	2790	2.1	200	60.4	0.49	10
0.24	0.33	80	2815	2.6	210	64.8	0.54	12
0.37	0.5	80	2840	3.0	225	73.8	0.84	15

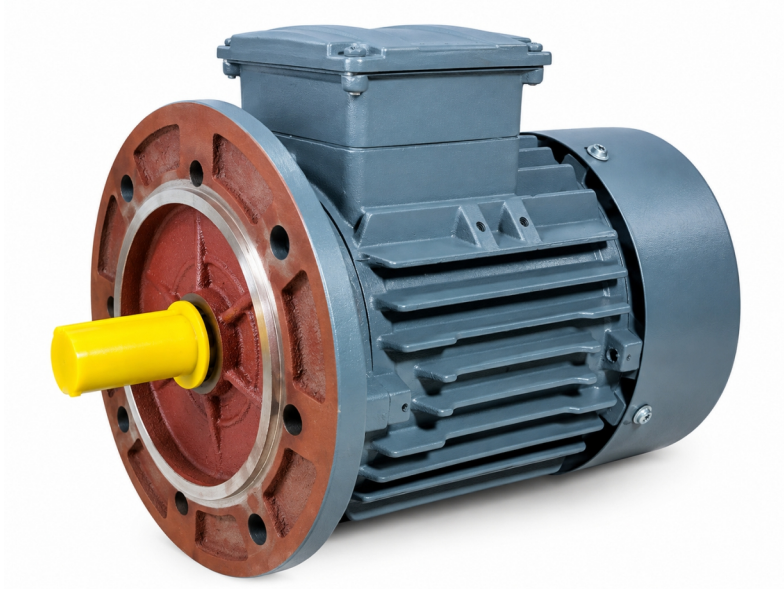

3-Phase

FLANCE MOTORS

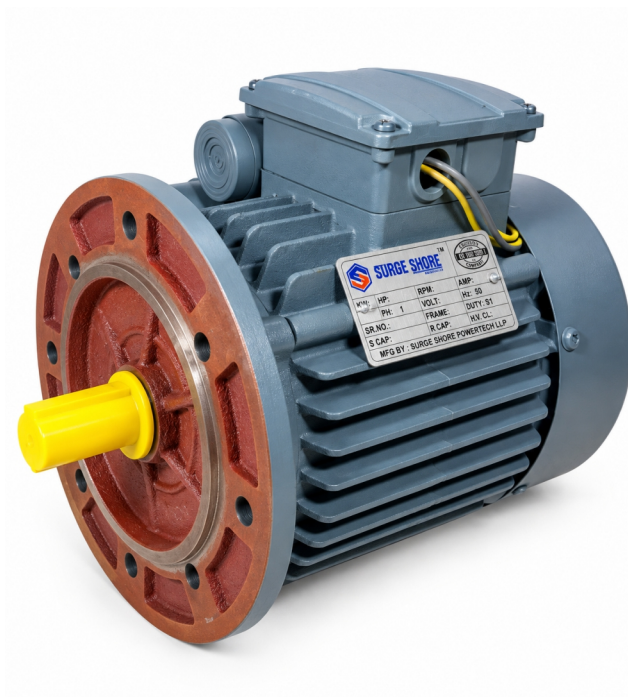

1-Phase

3-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Starting Current(%)	Efficiency	Power Factor
0.37	0.5	71	1400	1.15	210	320	72.7	0.65
0.55	0.75	80	1410	1.35	205	420	77.1	0.74
0.75	1	80	1415	1.9	210	430	79.6	0.73
1.1	1.5	90S	1410	2.5	210	455	81.4	0.81
1.5	2	90L	1420	3.2	215	460	82.8	0.82
2.2	3	100L	1425	4.7	200	490	84.3	0.79
3.7	5	112M	1435	7.5	210	540	86.3	0.81
5.5	7.5	132S	1450	10.8	160	500	83.9	0.85
7.5	10	132M	1450	14.3	165	510	85.33	0.86

The epitome of efficiency, reliability, and performance. Engineered to perfection, our motors are the driving force behind seamless operations in various industries.

1-Phase

Kw	Hp	Frame	Full Load RPM	Current	Torque (%)	Starting Current(%)	Efficiency	Power Factor	Running Capacitor	Starting Capacitor
0.18	0.25	71	1450	2	270	475	63	0.8	15	-
0.37	0.5	80	1440	3.4	275	500	65	0.79	15	80-100
0.75	1	90S	1450	6.7	250	475	72	0.75	15	100-120
1.1	1.5	90L	1455	7.8	240	525	75	0.85	25	150-200
1.5	2	100L	1460	9.1	250	500	79	0.91	30	200-250
2.2	3	112M	1460	12.5	275	550	81	0.95	30+30	200-250



3-Phase

COOLANT PUMPS

3-Phase

MODEL Name	POWER (kw)	POWER (hp)	HEAD RANGE (mtr)	DISCHARGE (lpm)	PIPE SIZE (inch)
PCP15	0.1	0.15	4	50	1/2"
PCP25	0.18	0.25	6	80	3/4"

APPLICATION :

TYPES OF FLUIDS: • WATER COOLING EMULSION • COOLING / CUTTING OIL

USED ON :

All CNC machines, Lathes and machining centers, Most suited for through tool cooling, deep hole drilling etc. also suitable for industrial washing



SELF PRIMING PUMPS

MODEL Name	POWER (kw)	POWER (hp)	PIPE SIZE (Inch)	HEAD RANGE (mtr)	DISCHARGE RANGE (LPH)
DELUX 50	0.37	0.5	1/2"X1/2"	30	725-1900
DELUX 75	0.55	0.75	1" X 1"	40	700-2450
DELUX 100	0.75	0.1	1" X 1"	50	575-2625

FEATURES

High Efficiency and energy Saving Design.
Wide Voltage Range. High Suction Capacity.
Fitted with Thermal Overload Protector (TOP).
Superior Mechanical Seal for longer life.
Anti-friction ball bearings, Forged Brass Impeller.
Totally Enclosed Fan Cooled (TEFC) construction resists dust, moisture.
Better Insulating Material, Easy Maintainable Design
Light Weight and Compact Design



SCAN FOR LOCATION



SURGE SHORE™
POWERTECH LLP

Address. Plot No. 1/7, Copper Ind. Area, Nr. Korat Chowk,
Rajkot, Gujarat - 360022

W. www.surgeshorepowertech.com
E. Surgeshorepowertech@gmail.com

Contact. +91 91739 59019