



SURGE SHORETM
POWERTECH LLP

Driving Performance

INDUSTRIAL VIBROMOTOR SERIES

MES 2-Pole 3000 RPM Centrifugal Vibrating Drive Motors



High-Frequency Eccentric Vibration Technology

- Compact Heavy-Duty Casting Housing (IP55 Standard)
- Adjustable Eccentric Weights for Calibrated Centrifugal Force
- Class F 155C Copper Winding with Heavy-Duty Shielded Bearings

MES MODEL

2 POLE - 3000 RPM




ENGINEERING SPECIFICATIONS & MOUNTING DIMENSIONS (mm)

Model	K.W	HP	A	B	C	D	E	F	OH	M	FORCE (N)	WEIGHT
MES 0.18	0.18	0.25	250	170	155	95	130	26	4 X 11	125	2500	7 kg

KEY ENGINEERING HIGHLIGHTS:

- Premium C.I. Grade Casting Body designed for rigorous continuous vibrating duty (S1 Rating).
- Dual-end adjustable eccentric weights enable stepless centrifugal force tuning.
- High-temperature Class F (155C) copper insulation with vacuum pressure impregnation.
- Special vibration-proof heavy-duty grease packed bearings for extended operational life.

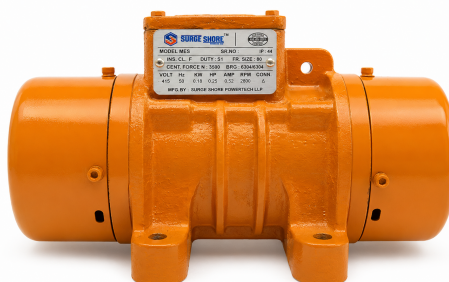

MES MODEL

2 POLE - 3000 RPM




ENGINEERING SPECIFICATIONS & MOUNTING DIMENSIONS (mm)

Model	K.W	HP	A	B	C	D	E	F	OH	M	FORCE (N)	WEIGHT
MES 0.37	0.37	0.5	280	190	160	70	131	20	4 X 11	100	3500	11 kg

KEY ENGINEERING HIGHLIGHTS:

- Premium C.I. Grade Casting Body designed for rigorous continuous vibrating duty (S1 Rating).
- Dual-end adjustable eccentric weights enable stepless centrifugal force tuning.
- High-temperature Class F (155C) copper insulation with vacuum pressure impregnation.
- Special vibration-proof heavy-duty grease packed bearings for extended operational life.

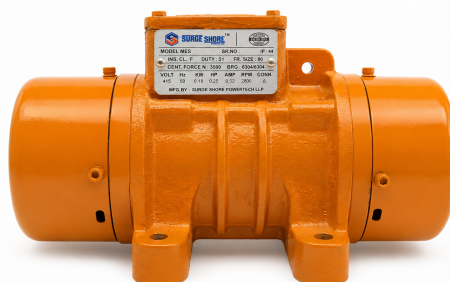

MES MODEL

2 POLE - 3000 RPM




ENGINEERING SPECIFICATIONS & MOUNTING DIMENSIONS (mm)

Model	K.W	HP	A	B	C	D	E	F	OH	M	FORCE (N)	WEIGHT
MES 0.75	0.75	1	340	215	210	70	170	25	4 X 13	105	8000	16 kg

KEY ENGINEERING HIGHLIGHTS:

- Premium C.I. Grade Casting Body designed for rigorous continuous vibrating duty (S1 Rating).
- Dual-end adjustable eccentric weights enable stepless centrifugal force tuning.
- High-temperature Class F (155C) copper insulation with vacuum pressure impregnation.
- Special vibration-proof heavy-duty grease packed bearings for extended operational life.

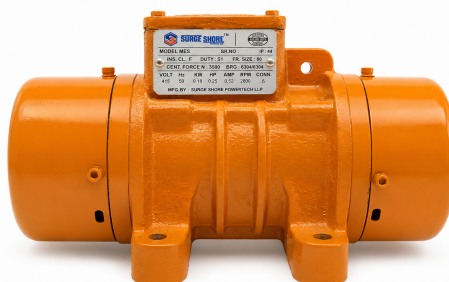

MES MODEL

2 POLE - 3000 RPM



ENGINEERING SPECIFICATIONS & MOUNTING DIMENSIONS (mm)

Model	K.W	HP	A	B	C	D	E	F	OH	M	FORCE (N)	WEIGHT
MES 1.5	1.5	2	390	230	230	145	195	50	4 X 16	190	15800	38 kg

KEY ENGINEERING HIGHLIGHTS:

- Premium C.I. Grade Casting Body designed for rigorous continuous vibrating duty (S1 Rating).
- Dual-end adjustable eccentric weights enable stepless centrifugal force tuning.
- High-temperature Class F (155C) copper insulation with vacuum pressure impregnation.
- Special vibration-proof heavy-duty grease packed bearings for extended operational life.



How To Choose A Vibromotor

$$F_c = (\mu * e * w^2) / 1000$$

$$w = 2 * \pi * f_m$$

$$f_m = 1 / n_s$$

FORMULA VARIABLES & DEFINITIONS:

- F_c** = Centrifugal Force (Vibrating Force) in kN
- μ** = Mass of the Eccentric Disc in kg
- e** = Distance from the Centre of Gravity to the Centre of Motion in meters (m)
- w** = Angular Speed of Motor Eccentric in 1/s
- f_m** = Mechanical Frequency (Hz)
- n_s** = Motor Speed in RPM (3000 RPM at 50Hz, 2-Pole)

TYPICAL INDUSTRIAL APPLICATIONS:

- Vibrating Screens & Grading Sieves (Foundries, Mining, Seeds & Chemicals)
- Feeders & Hoppers (Bulk material anti-bridging & flow aid)
- Compaction Tables & Concrete Pre-Cast Moulds
- Dewatering Sieves & Food Processing Conveyors



MANUFACTURING PLANT & HEAD OFFICE

Plot No. 1/7, Copper Ind. Area, Nr. Korat Chowk,
Rajkot, Gujarat - 360022, India

Website: www.surgeshorepowertech.com

Email: Surgeshorepowertech@gmail.com

Direct Contact / Sales: +91 91739 59019

ISO 9001:2015 Certified Manufacturing Facility

100% In-House Dielectric & Performance Tested