

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

Happisoy Global is a global B2B supply platform specializing in wholesale and outsourcing services across lighting, consumer electronics, industrial hardware components, and authorized aviation parts.

We serve clients worldwide — including lighting distributors, retailers, home improvement chains, digital device dealers, e-commerce sellers, supermarkets, and public-private partnership (PPP) projects.

Global Sourcing, Smart Supply — our promise. By integrating cross-border supply chains and leveraging end-market demand, we help brands expand globally while delivering high-quality, cost-effective products to our customers.

Our goal is to become the go-to B2B platform for commercial, industrial, and individual buyers, offering one-stop procurement and customized wholesale solutions.



LED Lighting

Energy-efficient spotlights, track lights, crystal chandeliers, wall lamps, solar LED street lights, and more for home and business.




Consumer Electronics

Portable cameras, smart locks, laptops, e-readers, audio gear, humidifiers, power banks, and lifestyle gadgets.



Industrial Hardware

Reliable components for industrial applications, including redundant power supplies and hard drives.



Aviation Parts

Authorized aviation parts and navigation system components, including Local Control Panels.

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

Contents

CA, CB & CC Series Streetlight Head	2
P Series Street Light Head	7
L Series Luminaire Head	10
H Series Streetlight	12
TA Series On-Gird Street Light Head	15
TB Series On-Gird Street Light Head	16
LED Solar Streetlight	17
LED Solar Streetlight Series A	17
LED Solar Streetlight Series B	19
LED Solar Streetlight Series C	20
LED Solar Streetlight Series D	21
LED Solar Streetlight Series E	23
LED Solar Streetlight Series Cruise	24
LED Solar Streetlight Series DJ-A	25
LED Solar Streetlight Series HL	26
LED Solar Streetlight Series JD-B	27
LED Solar Streetlight Series FY	28
LED Solar Streetlight Series Cruise Fleet	29
LED Solar Streetlight Series KM	30
Solar LED Street Light Applications	31

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

CA, CB & CC Series Streetlight Head – High-brightness imported chips, long life, brand driver with over-voltage/short-circuit/lightning protection, die-cast aluminum + 3D cooling, multiple lens angles for tailored light distribution, IP67 waterproof/dustproof.

Chip Brand:   

Chip Model: 3030/5050

Drivers Brand:   

CA, CB, CC Series Applications:



Happisoy Global

WhatsApp: +8618589025486


Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


CA1: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions




Polar Curve

Power Available: 30W/40W/50W/60W


Color Available: Black/White/Dark Gray/Silver Sand

CA2: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W

Dimensions



Appearance



Polar Curve


Power Available: 60W/80W/100W/120W

Color Available: Black/White/Dark Gray/Silver Sand


CA3: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve

Power Available: 90W/120W/150W/180W

Color Available: Black/White/Dark Gray/Silver Sand

Happisoy Global

WhatsApp: +8618589025486


Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


CA4: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve


Power Available: 120W/160W/200W/240W

Color Available: Black/White/Dark Gray/Silver Sand


CA5: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve


Power Available: 150W/200W/250W/300W

Color Available: Black/White/Dark Gray/Silver Sand


CA6: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve

Power Available: 180W/240W/300W/360W

Color Available: Black/White/Dark Gray/Silver Sand



Happiso Global

WhatsApp: +8618589025486

Email: contact@happisoynlobal.com

Web: www.happisoynlobal.com

CB2: Overall luminaire efficacy: 130 Lm/W – 170 Lm/W



Appearance



Dimensions

Polar Curve

Power Available: 60W/80W/100W

Color Available: Black/White/Dark Gray/Silver Sand

CB3: Overall luminaire efficacy: 130 Lm/W – 170 Lm/W



Appearance



Dimensions

Polar Curve

Power Available: 90W/120W/150W

Color Available: Black/White/Dark Gray/Silver Sand

CB4: Overall luminaire efficacy: 130 Lm/W – 170 Lm/W



Appearance

Dimensions

Polar Curve

Power Available: 90W/120W/150W

Color Available: Black/White/Dark Gray/Silver Sand



Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

CC1: Overall luminaire efficacy: 130 Lm/W – 190 Lm/W



Appearance



Dimensions

Polar Curve

Power Available: 50W/60W

Color Available: Black/White/Dark Gray/Silver Sand

CC2: Overall luminaire efficacy: 130 Lm/W – 190 Lm/W



Appearance

Dimensions

Polar Curve

Power Available: 100W/120W



Color Available: Black/White/Dark Gray/Silver Sand

P Series Street Light Head: Features high-efficacy LED chips, a dual silicone ring and silicone waterproofing design, a PC (polycarbonate) lens, IP68 waterproof rating, and comes with a built-in waterproof connector.





WhatsApp: +8618589025486
Email: contact@happisoyglobal.com
Web: www.happisoyglobal.com

Drivers Brand:

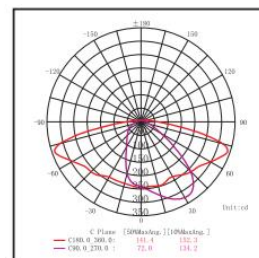



Polar Curve

Color Available: Black/White/Dark Gray/Silver Sand





Polar Curve

Color Available: Black/White/Dark Gray/Silver Sand





Polar Curve

Color Available: Black/White/Dark Gray/Silver Sand



Polar Curve

Color Available: Black/White/Dark Gray/Silver Sand



Polar Curve

Color Available: Black/White/Dark Gray/Silver Sand

L Series Luminaire Head: Extensively applied in roadways, expressways, public plazas, residential villas, parks, and other outdoor environments.



Chip Brand:   


Chip Model: 3030/5050

Drivers Brand:   


L1: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve

Power Available: 30W/40W/50W/60W

Color Available: Black/White/Dark Gray/Silver Sand

Happisoy Global

WhatsApp: +8618589025486


Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


L2: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions

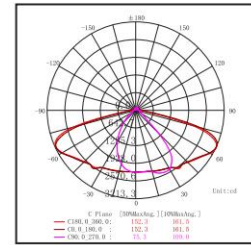

Polar Curve


Power Available: 60W/80W/100W/120W

Color Available: Black/White/Dark Gray/Silver Sand


L3: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions

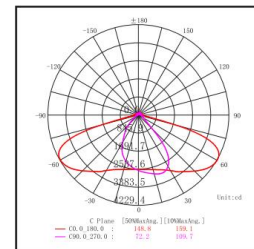

Polar Curve


Power Available: 90W/120W/150W/180W

Color Available: Black/White/Dark Gray/Silver Sand


L4: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve

Power Available: 120W/160W/200W/240W

Color Available: Black/White/Dark Gray/Silver Sand

Happiso Global

WhatsApp: +8618589025486


Email: contact@happisoGLOBAL.com

Web: www.happisoGLOBAL.com


L5: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance

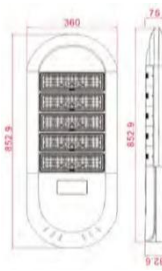

Dimensions



Polar Curve


Power Available: 150W/200W/250W/300W

Color Available: Black/White/Dark Gray/Silver Sand


L6: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance

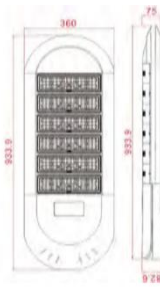

Dimensions



Polar Curve

Power Available: 180W/240W/300W/360W

Color Available: Black/White/Dark Gray/Silver Sand

H Series Streetlight – High-brightness imported chips, long life; brand driver with over-voltage/short-circuit/lightning protection; die-cast aluminum + 3D cooling; multiple lens angles for tailored light distribution; IP67 waterproof/dustproof.



Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com



Web: www.happisoyglobal.com

Chip Brand:   

Chip Model: 3030/5050

Drivers Brand:   

H1: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions

Polar Curve

Power Available: 30W/40W/50W/60W

Color Available: Black/White/Dark Gray/Silver Sand

H2: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W

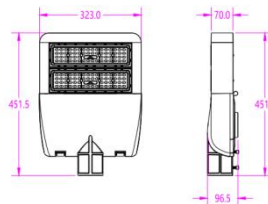

Appearance



Dimensions

Polar Curve

Power Available: 60W/80W/100W/120W

Color Available: Black/White/Dark Gray/Silver Sand

H3: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W

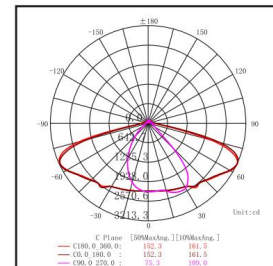

Appearance

Dimensions

Polar Curve

Power Available: 90W/120W/150W/180W

Color Available: Black/White/Dark Gray/Silver Sand

Happisoy Global

WhatsApp: +8618589025486


Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


H4: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance

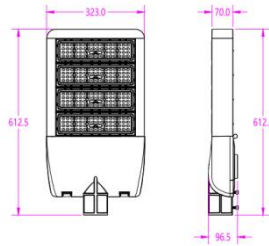

Dimensions



Polar Curve


Power Available: 120W/160W/200W/240W

Color Available: Black/White/Dark Gray/Silver Sand


H5: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions



Polar Curve


Power Available: 150W/200W/250W/300W

Color Available: Black/White/Dark Gray/Silver Sand


H6: Overall luminaire efficacy: 130 Lm/W – 210 Lm/W



Appearance



Dimensions

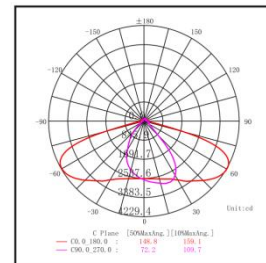


Polar Curve

Power Available: 180W/240W/300W/360W

Color Available: Black/White/Dark Gray/Silver Sand

TA Series On-Gird Street Light Head: Overall luminaire efficacy: 130 Lm/W – 170 Lm/W

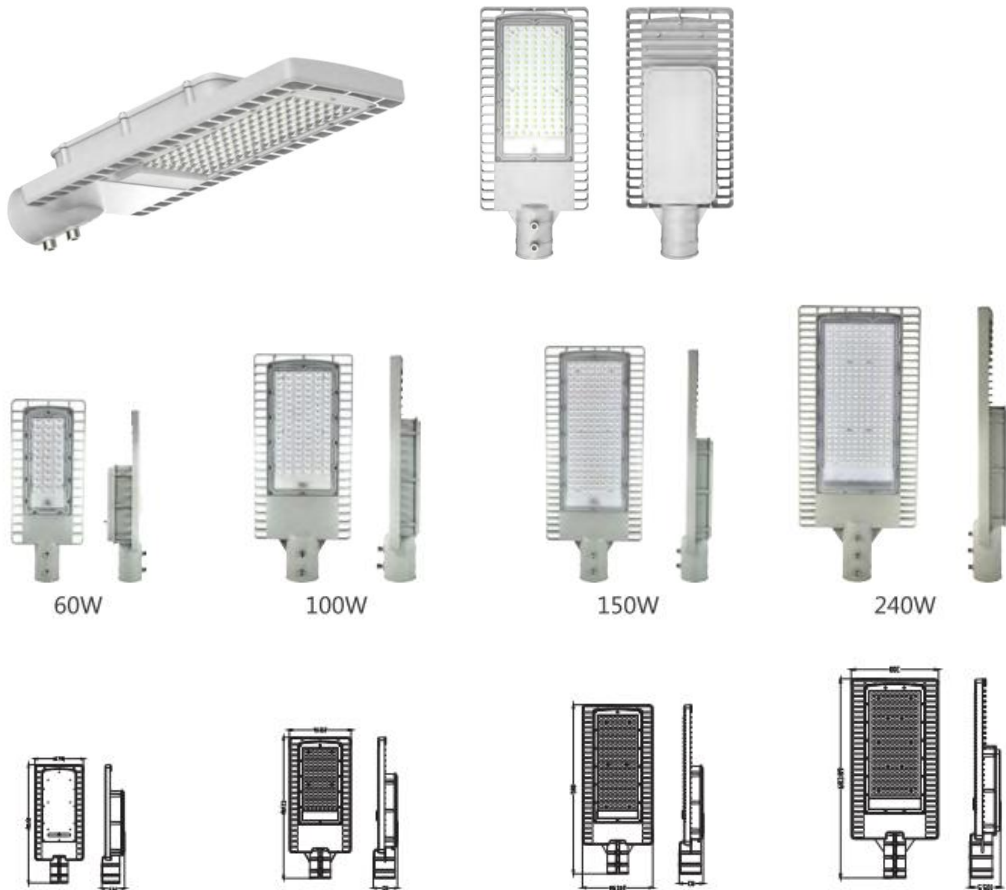

TA Series Street Light Head – Specifications

Model	Power	Dimensions	LED Chip Type	LED Quantity	Luminous Efficacy	Color Temperature
TA	60W	L484 × W211 × H83 mm	3030	60 LEDs	135–170 Lm/W	3000–6500K
TA	100W	L580 × W242 × H83 mm	3030	100 LEDs / 120 LEDs	135–170 Lm/W	3000–6500K
TA	150W	L685 × W300 × H106 mm	3030	180 LEDs / 200 LEDs	135–170 Lm/W	3000–6500K
TA	200W–240W	L685 × W300 × H106 mm	3030	250 LEDs / 300 LEDs	135–170 Lm/W	3000–6500K

TB Series On-Gird Street Light Head: Overall luminaire efficacy: 130 Lm/W – 170 Lm/W



TB Series Street Light Head – Specifications

Model	Power	LED Chip Type	LED Quantity (3030)	LED Chip Type	LED Quantity (5050)	Luminous Efficacy
LMC-TB-50W	50W	3030	72 / 96 / 144 LEDs	5050	24 / 36 / 48 LEDs	130–200 Lm/W
LMC-TB-100W	100W	3030	108 / 144 / 216 LEDs	5050	36 / 54 / 72 LEDs	130–200 Lm/W
LMC-TB-150W	150W	3030	180 / 240 / 360 LEDs	5050	60 / 90 / 120 LEDs	130–200 Lm/W
LMC-TB-200W	200W	3030	240 / 320 / 480 LEDs	5050	80 / 120 / 160 LEDs	130–200 Lm/W
LMC-TB-300W	240W–300W	3030	384 / 576 LEDs	5050	144 / 192 LEDs	130–200 Lm/W

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

LED Solar Streetlight: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W



Chip Brand:   

Chip Model: 3030/5050

Battery Brand:   

LED Solar Streetlight Series A: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W


Modules options: Module 3, 4, 5, and 6



Happisoy Global

WhatsApp: +8618589025486
Email: contact@happisoyglobal.com
Web: www.happisoyglobal.com

Dimensions:

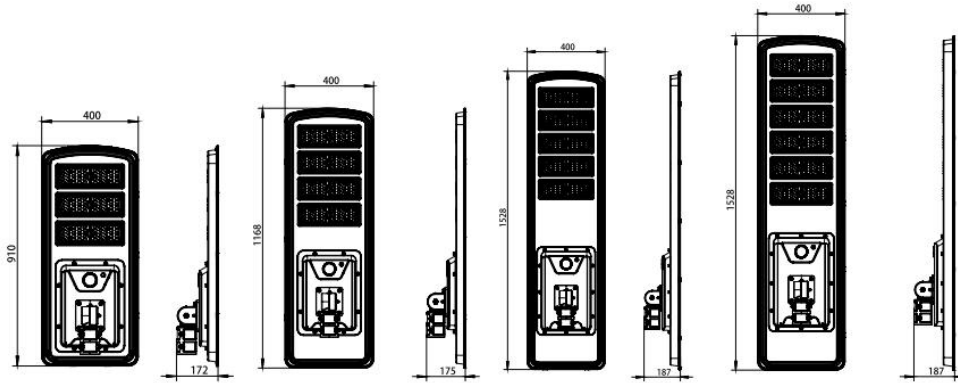

Arm options: 80HW / 80DC / 60DC / 80HW / 80DC



Product Specifications – Solar LED Module Series (Module 3–6)

Parameter	Module 3	Module 4	Module 5	Module 6
Luminaire Dimensions	910 × 400 × 175 mm	1168 × 400 × 175 mm	1528 × 400 × 187 mm	1528 × 400 × 187 mm
Battery Compartment Dimensions	165 × 220 × 56 mm	165 × 220 × 56 mm	165 × 280 × 76 mm	165 × 280 × 76 mm
Battery	3.2V / 60Ah	3.2V / 70Ah	12.8V / 75Ah	12.8V / 75Ah
Lens Specification	70° × 140°	70° × 140°	70° × 140°	70° × 140°
LED Chip	5050 lens type, 150 LEDs	5050 lens type, 200 LEDs	5050 lens type, 250 LEDs	5050 lens type, 300 LEDs (6 panels)
Mounting Arm Dimensions	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm
Solar Panel	65W	90W	120W	120W
Control System	External separate controller	External separate controller	External separate controller	External separate controller

Happiso Global


WhatsApp: +8618589025486
Email: contact@happiso-global.com
Web: www.happiso-global.com

LED Solar Streetlight Series B: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: Module 2, 3, 4, and 5



Dimensions:

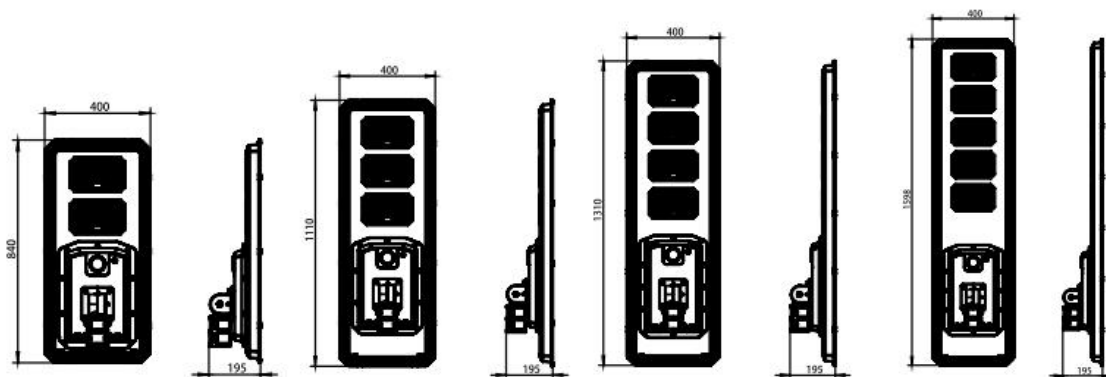

Arm options: 80HW / 80DC / 60DC / 80HW / 80DC



Product Specifications – Solar LED Module Series (Module 2–5)

Parameter	Module 2	Module 3	Module 4	Module 5
Luminaire Dimensions	840 × 400 × 195 mm	1110 × 400 × 195 mm	1310 × 400 × 195 mm	1598 × 400 × 195 mm
Battery Compartment Dimensions	165 × 240 × 86 mm	165 × 240 × 86 mm	165 × 280 × 86 mm	165 × 280 × 86 mm
Battery	3.2V / 60Ah	3.2V / 80Ah	12.8V / 100Ah	12.8V / 120Ah

Happiso Global

WhatsApp: +8618589025486
Email: contact@happiso-global.com
Web: www.happiso-global.com


Lens Specification	70° × 140°	70° × 140°	70° × 140°	70° × 140°
LED Chip	3030 / 5050 (optional)	3030 / 5050 (optional)	3030 / 5050 (optional)	3030 / 5050 (optional)
Mounting Arm Dimensions	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm
Solar Panel	60W	80W	100W	120W
Control System	External separate controller	External separate controller	External separate controller	External separate controller

LED Solar Streetlight Series C: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: Module 6, 8, 12, and 16



Dimensions:

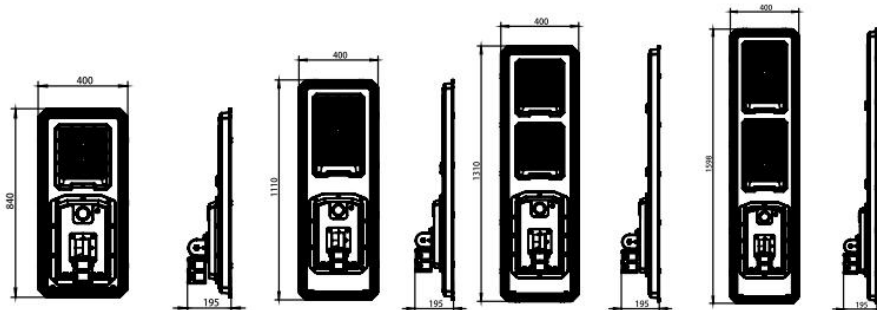

Arm options: 80HW / 80DC / 60DC / 80HW / 80DC



Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

Product Specifications – Solar LED Module Series (6-Cell / 8-Cell / 12-Cell / 16-Cell)

Parameter	6 Cells	8 Cells	12 Cells	16 Cells
Luminaire Dimensions	840 × 400 × 195 mm	1110 × 400 × 195 mm	1310 × 400 × 195 mm	1598 × 400 × 195 mm
Battery Compartment Dimensions	165 × 240 × 86 mm	165 × 240 × 86 mm	165 × 280 × 86 mm	165 × 280 × 86 mm
Battery	3.2V / 60Ah	3.2V / 80Ah	12.8V / 100Ah	12.8V / 120Ah
Lens Specification	70° × 140°	70° × 140°	70° × 140°	70° × 140°
LED Chip	3030 / 5050 (optional)	3030 / 5050 (optional)	3030 / 5050 (optional)	3030 / 5050 (optional)
Mounting Arm Dimensions	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm
Solar Panel	60W	80W	100W	120W
Control System	External separate controller	External separate controller	External separate controller	External separate controller box

LED Solar Streetlight Series D: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: Module 2, 3, and 4




Happiso Global

WhatsApp: +8618589025486

Email: contact@happisoymglobal.com

Web: www.happisoymglobal.com

Dimensions:

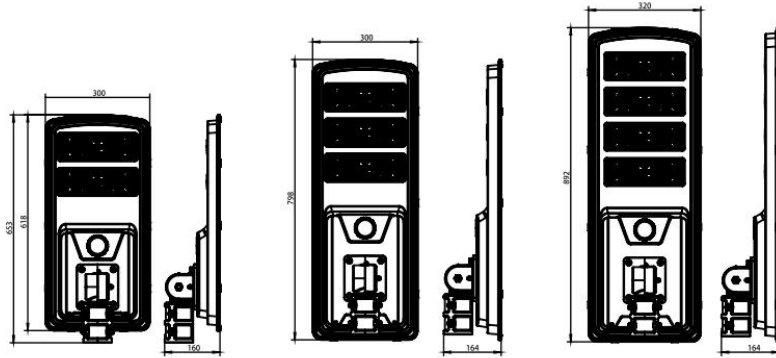

Arm options: Frog Cap; Long Extruded Profile; 60HW



Product Specifications – Solar LED Module Series (Module 2–4)


Parameter	Module 2	Module 3	Module 4
Luminaire Dimensions	618 × 300 × 160 mm	798 × 300 × 164 mm	892 × 320 × 164 mm
Battery Compartment Dimensions	160 × 140 × 45 mm	160 × 230 × 50 mm	165 × 230 × 50 mm
Battery	3.2V / 30Ah	3.2V / 40Ah	3.2V / 50Ah
Lens Specification	70° × 140°	70° × 140°	70° × 140°
LED Chip	5050 lens type, 100 LEDs	5050 lens type, 150 LEDs	5050 lens type, 200 LEDs
Mounting Arm Dimensions	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm	Inner diameter 69 mm × Length 110 mm
Solar Panel	40W	50W	60W
Control System	External separate controller	External separate controller	External separate controller

LED Solar Streetlight Series E: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: Module A, B, and C



Dimensions:

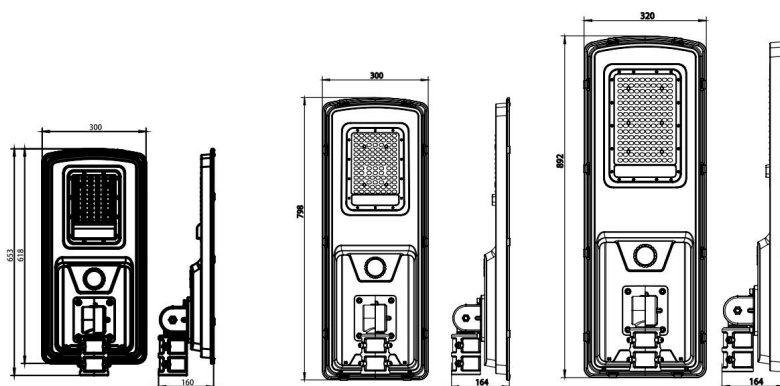

Arm options: Frog Cap; Long Extruded Profile; 60HW



Product Specifications – Solar LED Module Series (Model A / B / C)

Parameter	Model A	Model B	Model C
Luminaire Dimensions	560 × 235 × 68 mm	798 × 300 × 164 mm	892 × 320 × 164 mm
Battery Compartment Dimensions	83 × 148 × 46 mm	160 × 230 × 50 mm	165 × 230 × 50 mm

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


Battery	3.2V / 25Ah	3.2V / 30Ah	3.2V / 40Ah
Lens Specification	80° × 150°	80° × 150°	80° × 150°
LED Chip	5050 LEDs, 24 LEDs	5050 LEDs, 36 LEDs	5050 LEDs, 48 LEDs
Mounting Arm Dimensions	Inner diameter 64 mm × Length 90 mm	Inner diameter 64 mm × Length 90 mm	Inner diameter 64 mm × Length 90 mm
Solar Panel	25W	30W	35W
Control System	External separate controller	External separate controller	External separate controller

LED Solar Streetlight Series Cruise: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: Module A, and B



Dimensions:

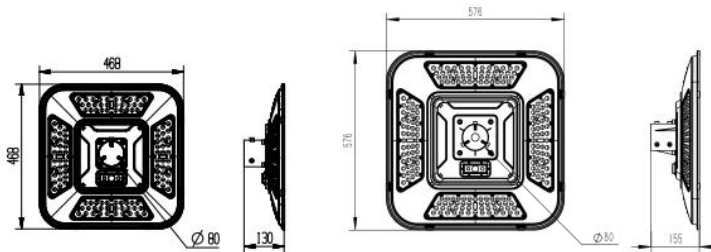

Product Specifications – Solar LED Module Series (Model A / B)

Parameter	Model A	Model B
Luminaire Dimensions	468 × 468 × 130 mm	580 × 580 × 155 mm
Battery Compartment Dimensions	108 × 145 × 38 mm	165 × 240 × 86 mm
Battery	3.2V / 30Ah	3.2V / 50Ah
Lens Specification	90°	90°
LED Chip	5050 lens type, 200 LEDs	5050 lens type, 200 LEDs

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com


Mounting Arm Dimensions	Inner diameter 82 mm × Length 130 mm	Inner diameter 82 mm × Length 155 mm
Solar Panel	35W	50W
Control System	External separate controller	External separate controller

LED Solar Streetlight Series DJ-A: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: 120 LEDs Model, and 200 LEDs Model



Dimensions:

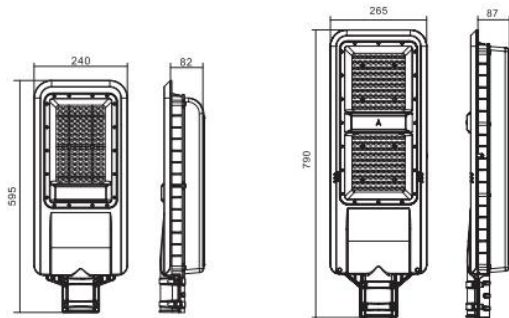

Product Specifications – Solar LED Module Series (120 LEDs / 200 LEDs)

Parameter	120 LEDs Model	200 LEDs Model
Luminaire Dimensions	430 × 150 × 75 mm	600 × 160 × 80 mm
Battery Voltage	3.2V / 12.8V, 60Ah (optional)	3.2V / 12.8V, 100Ah (optional)
LED Chip Type	3030 / 5050 (optional)	3030 / 5050 (optional)
LED Quantity	120 LEDs	200 LEDs
Solar Panel	100W – 120W	120W – 140W
Control System	Integrated MPPT controller board	Integrated MPPT controller board

Happiso Global

WhatsApp: +8618589025486

Email: contact@happisoymglobal.com


Web: www.happisoymglobal.com

LED Solar Streetlight Series HL: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: 60W, 120W, and 180W



Dimensions:

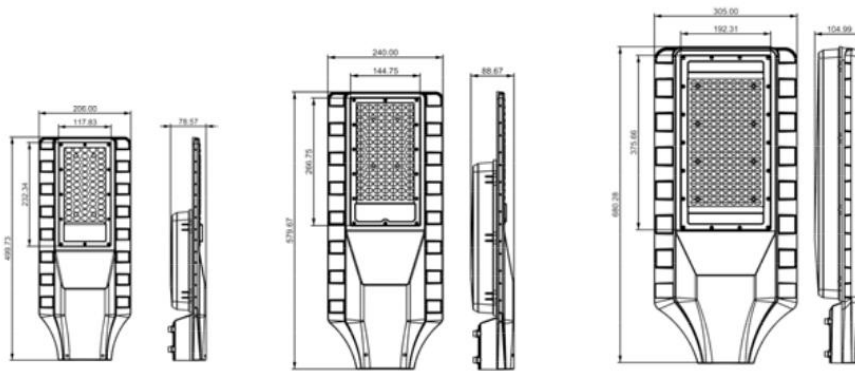

Product Specifications – Solar LED Module Series (60W / 120W / 180W)


Parameter	60W Model	120W Model	180W Model
Luminaire Dimensions	499 × 206 × 78 mm	579 × 240 × 88 mm	680 × 305 × 105 mm
Battery Voltage	3.2V / 45Ah	3.2V / 60Ah	3.2V / 100Ah
LED Chip Type	5050, 60 LEDs	5050, 100 LEDs	5050, 180 LEDs
Solar Panel	60W	120W	180W
Control System	Integrated MPPT controller board	Integrated MPPT controller board	Integrated MPPT controller board

LED Solar Streetlight Series JD-B: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: 60 LEDs Model, 100 LEDs Model, and 150 LEDs Model



Dimensions:

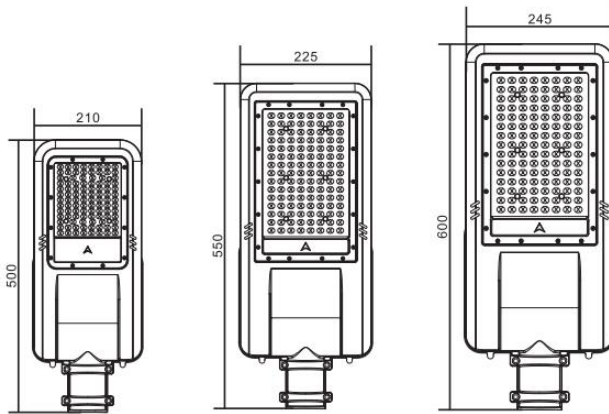

Product Specifications – Solar LED Module Series (60 LEDs / 100 LEDs / 150 LEDs)

Parameter	60 LEDs Model	100 LEDs Model	150 LEDs Model
Luminaire Dimensions	510 × 210 × 85 mm	550 × 225 × 90 mm	600 × 245 × 90 mm
Battery Voltage	3.2V / 45Ah	3.2V / 60Ah	3.2V / 100Ah
LED Chip Type	5050, 60 LEDs	5050, 100 LEDs	5050, 150 LEDs
Solar Panel	80W	100W	120W
Control System	Integrated MPPT controller board	Integrated MPPT controller board	Integrated MPPT controller board

Happiso Global


WhatsApp: +8618589025486
Email: contact@happisoynlobal.com
Web: www.happisoynlobal.com

LED Solar Streetlight Series FY: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: 60W, 100W, and 200W



Dimensions:

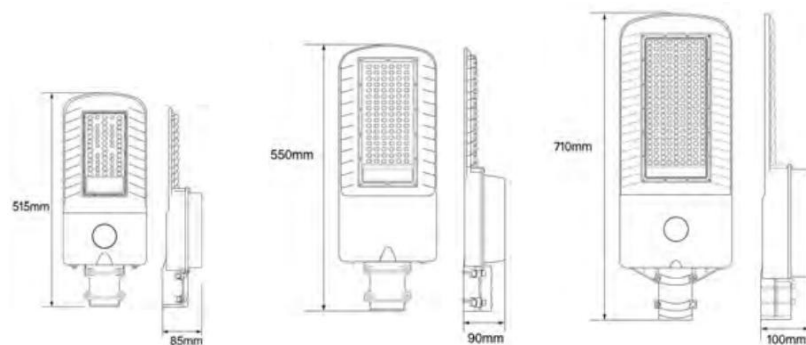

Product Specifications – Solar LED Module Series (60W / 100W / 200W)

Parameter	60W Model	100W Model	200W Model
Luminaire Dimensions	510 × 205 × 85 mm	550 × 250 × 90 mm	710 × 265 × 100 mm
Battery Voltage	3.2V / 45Ah	3.2V / 60Ah	3.2V / 100Ah
LED Chip Type	5050, 60 LEDs	5050, 100 LEDs	3030, 200 LEDs
Solar Panel	80W	100W	120W
Control System	Integrated MPPT controller board	Integrated MPPT controller board	Integrated MPPT controller board

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com


Web: www.happisoyglobal.com

LED Solar Streetlight Series Cruise Fleet: Overall luminaire efficacy: 150 Lm/W – 220 Lm/W

Modules options: 100W, 200W, and 300W



Dimensions:

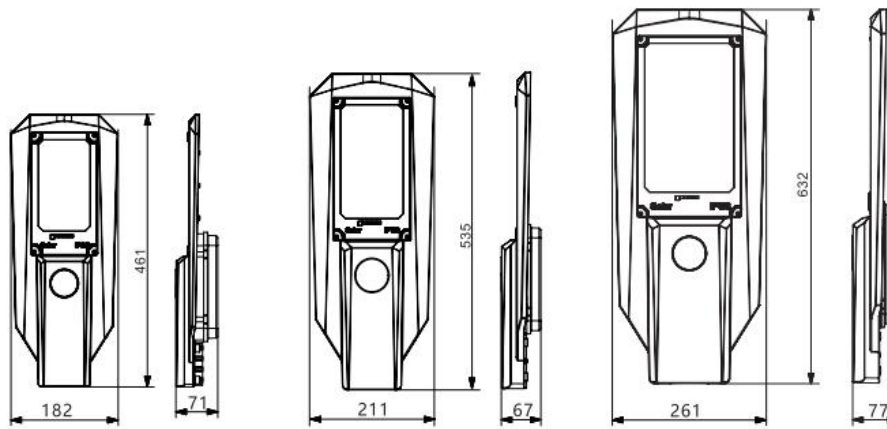

Product Specifications – Solar LED Module Series (100W / 200W / 300W)

Parameter	100W Model	200W Model	300W Model
Luminaire Dimensions	185 × 460 × 62.5 mm	211.1 × 534.6 × 82.5 mm	245 × 640 × 86.5 mm
Battery Voltage	3.2V / 45Ah	3.2V / 60Ah	3.2V / 100Ah
LED Chip Type	3030: 92 LEDs 5050: 46 LEDs	3030: 92 LEDs 5050: 46 LEDs	3030: 274 LEDs 5050: 137 LEDs
Solar Panel	80W	100W	120W
Control System	Integrated MPPT controller board	Integrated MPPT controller board	Integrated MPPT controller board

Happiso Global

WhatsApp: +8618589025486

Email: contact@happisoymglobal.com

Web: www.happisoymglobal.com

LED Solar Streetlight Series KM: Overall luminaire efficacy: 150

Lm/W – 220 Lm/W

Modules options: 100W



Product Specifications –KM-100W

Parameter	Specification
Model	LMC-KM-100W
Control Method	Light-controlled + remote-controlled version
Solar Panel	Polycrystalline silicon (6V / 45W)
Battery	3.2V / 40000mAh
LED Chip	High-brightness 3030 SMD LEDs
Material	Die-cast aluminum + PC (polycarbonate)
Waterproof Rating	IP65
Charging Time	3 – 5 hours
Color Temperature	6500K – 7000K
Luminaire Dimensions	596 × 252 × 93 mm
Solar Panel Dimensions	500 × 225 × 545 mm

Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com

Installations:



Solar LED Street Light Applications:



Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com



Happisoy Global

WhatsApp: +8618589025486

Email: contact@happisoyglobal.com

Web: www.happisoyglobal.com



Happiso Global

WhatsApp: +8618589025486

Email: contact@happiso.global

Web: www.happiso.global

