Emulator evaluation results

60 records, read from this directory. Bars show the median of the runs of a configuration; dots show each run. Higher is better throughout.

60	3	4	2026-11-12
result records	hosts: Linux x86-64, Windows x86-64, macOS ARM64	emulator modes	latest record (UTC)

Hosts: Linux x86-64 | Windows x86-64 | macOS ARM64 — Values: Measured

Hosts

The machines the results were measured on, as the records describe them.

Linux x86-64

Machine	The same PC as windows-x86_64, dual boot
CPU	Intel(R) Core(TM) i7-10700K CPU @ 3.80GHz
Logical CPUs	16
Memory	31 GiB
GPU	NVIDIA GeForce RTX 4070 (driver nvidia 595.99.02)
Operating system	Ubuntu 24.04.5 LTS (kernel 6.8.0-146-generic); Ubuntu 24.04.5 LTS (kernel 6.8.0-149-generic)
VM runtime	QEMU 8.2.2 (Debian 1:8.2.2+ds-0ubuntu1.18)
Container runtime	docker client 20.10.18, engine 20.10.18
Container engine	16 CPUs, 31 GiB (Ubuntu 24.04.5 LTS)
Records	34, 2026-11-12

Windows x86-64

Machine	The same PC as linux-x86_64, dual boot
CPU	Intel(R) Core(TM) i7-10700K CPU @ 3.80GHz
Logical CPUs	16
Memory	32 GiB
GPU	NVIDIA GeForce RTX 4070 – stated, not in the records
Operating system	10.0.26300
VM runtime	QEMU 11.1.0 (v11.1.0-12130-ge470268ff4)
Container runtime	podman client 5.8.9, engine 5.8.10
Container engine	16 CPUs, 16 GiB (fedora)
Records	2, 2026-11-11


macOS ARM64

Machine	Mac mini, Apple M6, 24 GB
CPU	Apple M6
Logical CPUs	12
Memory	24 GiB
GPU	Apple M6 (integrated GPU) – stated, not in the records
Operating system	27.2
VM runtime	QEMU 11.1.3
Container runtime	docker client 29.9.3, engine 29.5.2
Container engine	6 CPUs, 7.7 GiB (Ubuntu 24.04.4 LTS)
Records	24, 2026-11-11

CPU


SHA-256, one thread

MiB/s

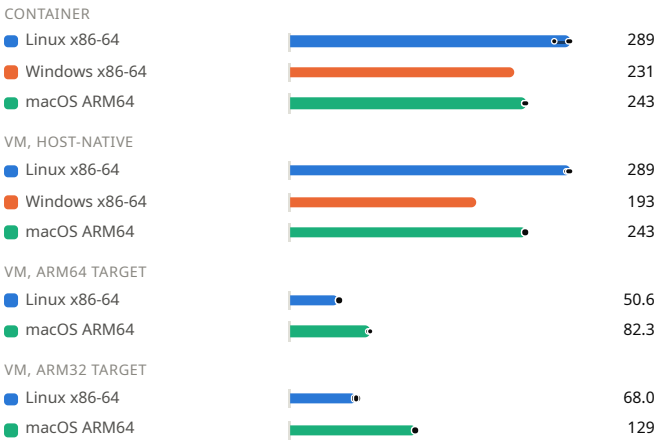


SHA-256, all threads

MiB/s

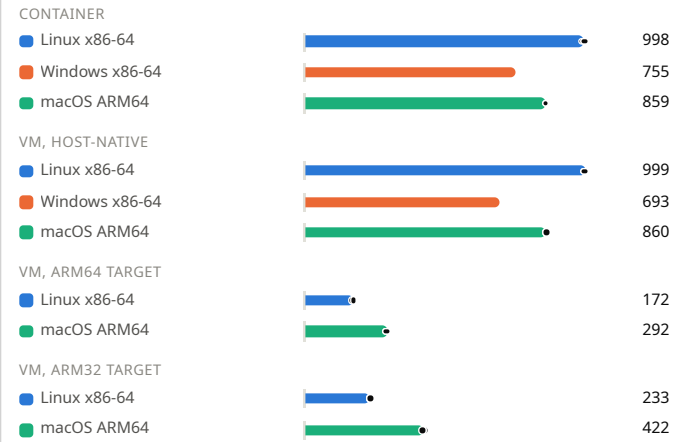

Matrix multiply (double)


Mflop/s

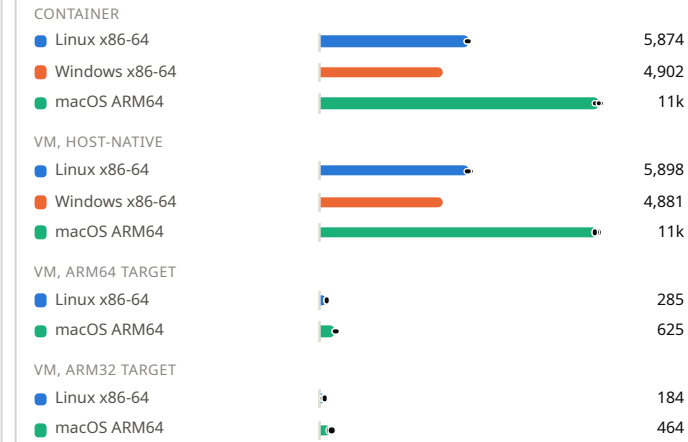

Memory allocation


malloc/free churn

Mops/s

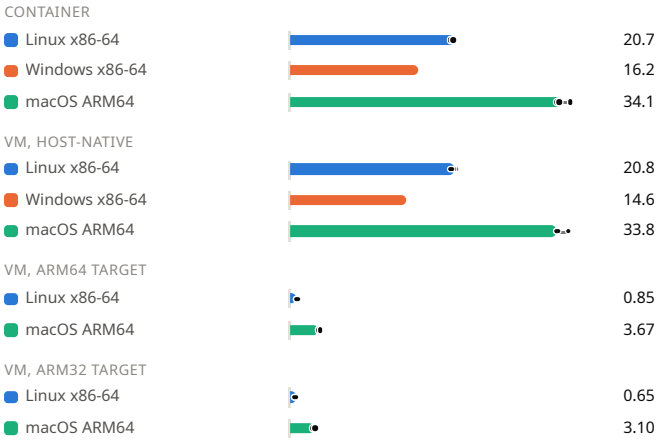

First touch of new pages


MiB/s

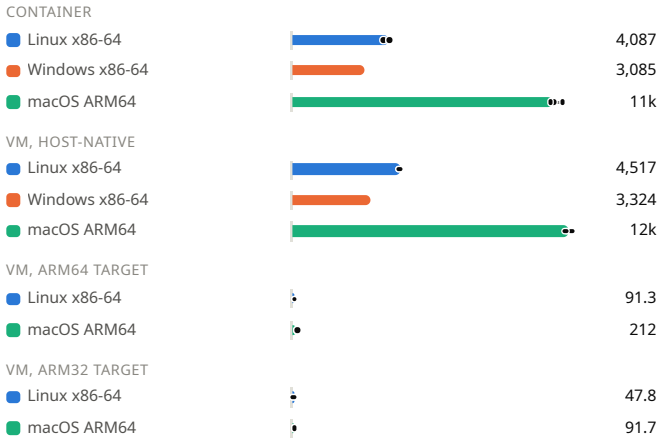

Memory bandwidth


memcpy

MiB/s

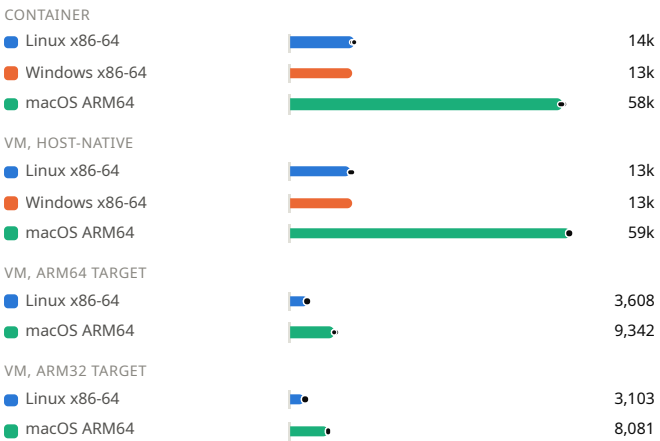


memset

MiB/s

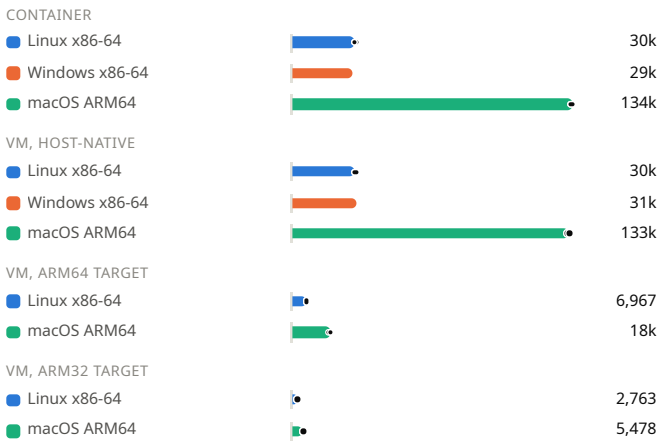

STREAM triad

MiB/s

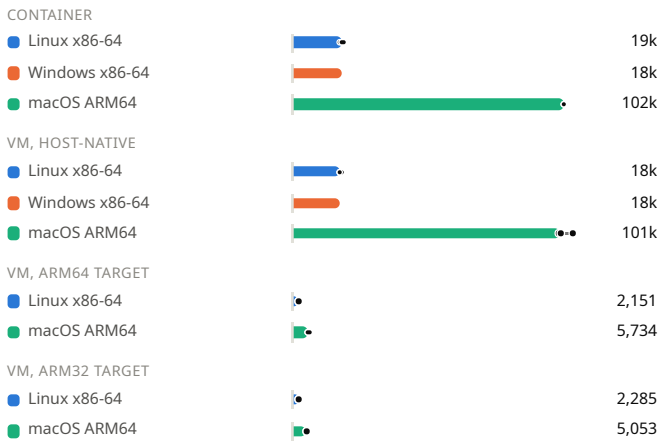


I/O

Sequential read
MiB/s




Sequential write
MiB/s

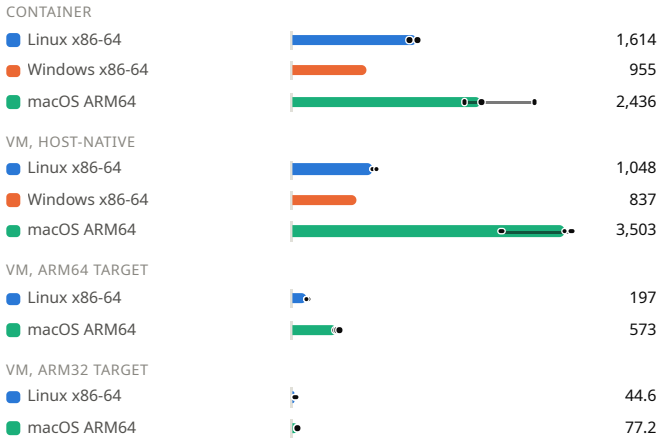

Random read, 4 KiB
IOPS



Random write, 4 KiB
IOPS

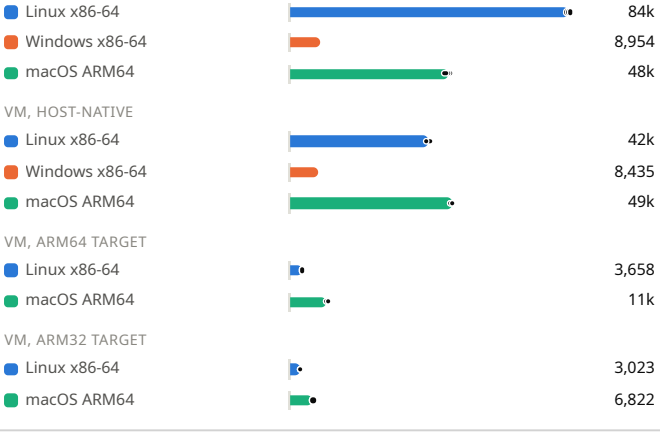

Synchronous write, 4 KiB
IOPS




Graphics

“GPU” rows had graphics mapped to the host's GPU; “CPU” rows had them emulated: rendered by the target's CPU. Relative values compare with the emulated container on the same host.


Wayland (CPU-drawn buffers) · 1920x1080

frames/s

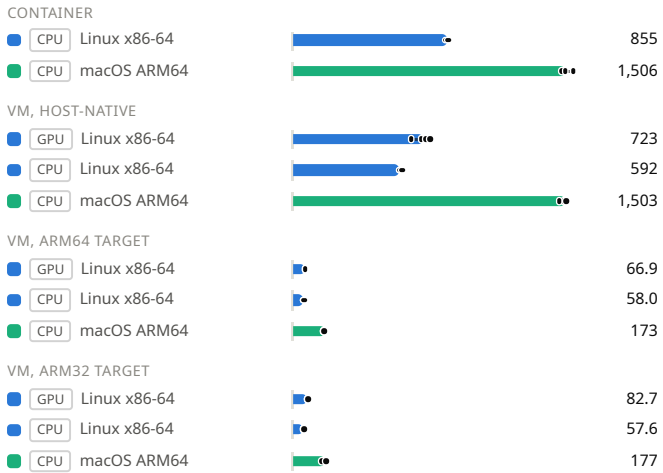


OpenGL ES · 1920x1080

frames/s

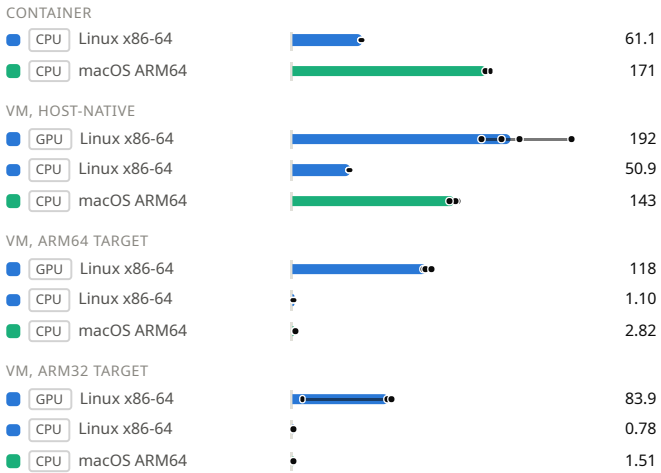

Vulkan · 1920x1080

frames/s

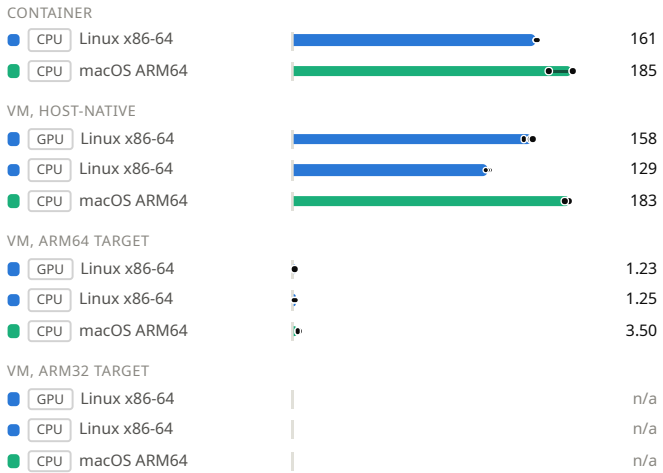

Flutter · 1920x1080

frames/s

