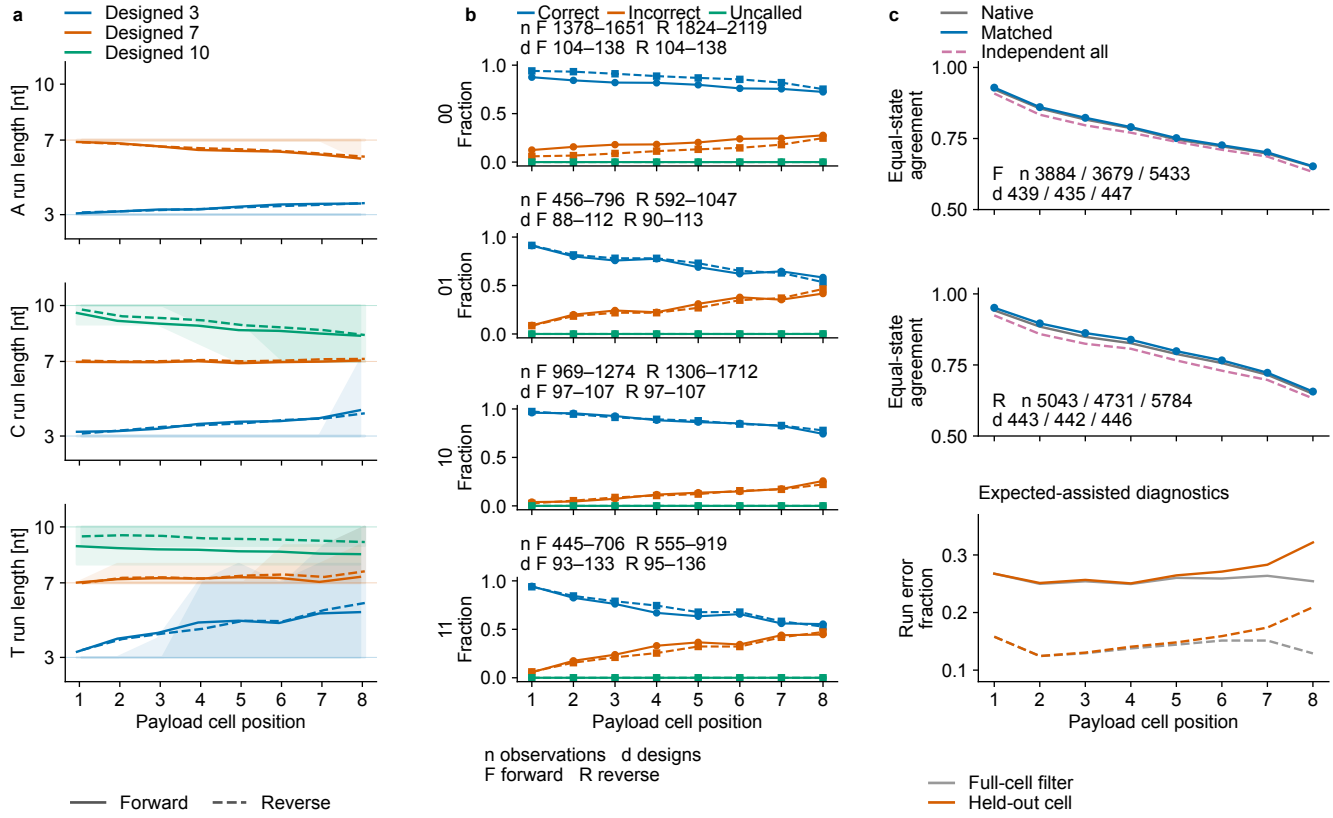
a
Designed 3
Designed 7
Designed 10
A run length [nt]
C run length [nt]
T run length [nt]
Payload cell position
Forward
Reverse
b
Correct
Incorrect
Uncalled
n F 1378–1651 R 1824–2119
d F 104–138 R 104–138
00 Fraction
n F 456–796 R 592–1047
d F 88–112 R 90–113
01 Fraction
n F 969–1274 R 1306–1712
d F 97–107 R 97–107
10 Fraction
n F 445–706 R 555–919
d F 93–133 R 95–136
11 Fraction
Payload cell position
n observations d designs
F forward R reverse
c
Native
Matched
Independent all
Equal-state agreement
F n 3884 / 3679 / 5433
d 439 / 435 / 447
R n 5043 / 4731 / 5784
d 443 / 442 / 446
Expected-assisted diagnostics
Run error fraction
Payload cell position
Full-cell filter
Held-out cell