DEMAK® GROUP
Resins & Dispensing Technology



CONTINUOUS VACUUM

DISPENSING EQUIPMENT FOR YOUR APPLICATIONS

Passion for Innovation

DEMAK® GROUP
Resins & Dispensing Technology



CV 55 ASI
2 Pumps



CV 170 ASI
2 Pumps

CV ASI
PATENTED TECHNOLOGY

- **CONTINUOUS VACUUM PROCESS** automatic loading/reloading of the resin from the drums for non stop production.
- **NO SETTLING**: continuous recirculation from the bottom to the top of tank with external Archimedean screw and continuous stirring of the product.

The **ASI (ANTI SETTLING INTERNAL)** system with internal pumps avoids any possible settling and allows maintenance without unloading of the tanks.

Thanks to the latest innovation process, most of DEMAK dispensing systems are designed with **CV TECHNOLOGY**.

The **CONTINUOUS VACUUM PROCESS** allows automatic loading/reloading of the resin from the drums for non stop production.

Automatic "**WORN PUMP GASKET**" alarm.

Continuous Vacuum means an **ULTRA EFFICIENT DEGASSING SYSTEM COMBINED WITH HIGH PRODUCTIVITY** for each customer.

Automatic loading of resin and hardener; automatic degassing (up to 0.2 mBar) with "**DEMAK® Continuous Vacuum System**".

DEMAK® THIN FILM DEGASSING SYSTEM with new double extra large plate to guarantee fast moisture extraction.

CV 55 - CV 170 - CV 600 huge tanks capacity to guarantee 24/7 continuous working.

DEMAK® GROUP
Resins & Dispensing Technology



CV 600 ASI
2 Pumps



Our **CV SYSTEM MODULARITY** allows you to add robots, vacuum chambers, pre-heating and polymerization ovens, as well as automatic lines to the existing dosing unit at any time.

TANK LEVEL CONTROL through load cells to avoid any maintenance of level control plunged into the resin and hardener.

CONTINUOUS VACUUM SYSTEM: 24/7 non-stop working.

NO SETTLING: continuous recirculation from the bottom to the top of tank with external Archimedean screw, continuous stirring of the product.

SINGLE MOTORIZED PUMP system that guarantees high flow pressure.



CV DL 70 ASE
up to 8 Pumps



CV 100 ASE
up to 4 Pumps

CV ASE
PATENTED TECHNOLOGY

- **SERVOMOTORS** let you control the resin flow speed in a very accurate way.
- Our product treatment system allows a **CONTINUOUS AND CONSTANT HOMOGENIZATION OF THE FILLERS**, avoiding settling anywhere in the process.

The **ASE (ANTI SETTLING EXTERNAL)** system with external pump system for fast and easy maintenance without unloading the tanks.

Automatic loading of resin and hardener; automatic degassing (up to 0.2 mBar) with "**DEMAK® Continuous Vacuum System**".

DEMAK® THIN FILM DEGASSING SYSTEM with new double extra large plate to guarantee fast moisture extraction.

CV DL 70 - CV 100 - CV 200 - CV 600 huge tanks capacity to guarantee 24/7 continuous working.

Automatic "**WORN PUMP GASKET**" alarm.

TANK LEVEL CONTROL through load cells to avoid any maintenance of level control plunged into the resin and hardener.

CONTINUOUS VACUUM SYSTEM: 24/7 non-stop working.

NO SETTLING: continuous recirculation from the bottom to the top of tank with external Archimedean screw, continuous stirring of the product.





CV 200 ASE
up to 8 Pumps

CV 600 ASE
up to 10 Pumps

- Our **CV SYSTEM MODULARITY** allows you to add at any time robots, vacuum chambers, pre-heating and polymerization ovens, as well as automatic lines to the existing dosing unit.

- **NO DOWNTIME FOR MAINTENANCE**: it involves mainly the piston inside the pumps. An automatic system (managed by the machine software) allows you to take off this part and to easily replace it.

Option of **MULTIPLE MOTORIZED PUMPS** to guarantee independent volumes.

Besides, ASE System main feature is the non-stop production with one (or more) set of pumps while performing maintenance on the others.

VARIABLE RATIO BETWEEN RESIN AND HARDENER.
Possibility of fast and precise changes of resin flow-out from nozzles.

HIGH ACCURANCY IN RESIN DISPENSING VOLUME.
Less reject.

All Continuous Vacuum machines have a **NEW GASKET SYSTEM** for the pistons with only one gasket and automatic registration during the wear-out of the same.

LOW COST MAINTENANCE (one gasket against 7 on traditional machines), longer durability thanks to the automatic registration during the working cycles.





CV 2 SMART
Stand Alone

CV 2 SMART + **VC xyz**
Vacuum Chamber

CV SMART
PATENTED TECHNOLOGY

SMALLEST UNIT
Ultra-efficient thanks to the automatic loading, degassing and dispensing.

The **CV SMART SERIES** s the newest generation of machines developed by **DEMAK®**.

The **CV SMART EQUIPMENT** performs all the main characteristics of the other series, in fact the ***CONTINUOUS VACUUM SYSTEM is always a central factor***.

The **CV2 SMART** is the smallest unit produced by **DEMAK®** and it is ultra-efficient thanks to automatic loading, degassing and dispensing. This equipment is capable to work **24/7 NON-STOP** and has a **21 lt capacity**.

The **CV2 SMART PUMPS** are driven by servomotors in order to guarantee optimal precision and the control of the dispensing speed curve, which can be regulated according to the production step and to the capability of the parts to receive resin.

The **CV2 SMART PUMPS** has been **DESIGNED ON A MODULAR CONCEPT**, so it is possible at any time to upgrade it with **XYZ ROBOT** or **VACUUM CHAMBERS** of a suitable size for the customer's application.





CV DL 70 ASI
Stand Alone

CV DL 70 ASI + **VC xyz**
Vacuum Chamber

MODULAR CONCEPT
It is possibleto upgrade it with XYZ ROBOT or VACUUM CHAMBERS at any time.

ANTI-SETTLING
Thanks to the continuous materials recirculation and single brushless motorized pump upon each tank.

One of the most complete machine of the **CV SMART** series is the **CV2 SMART + VC**: an automatic dispensing unit with a vacuum chamber provided with an integrated xyz robot.

This equipment is particularly compact and suitable for any application that needs vacuum dispensing.

The **CV DL70 ASI** has a capacity of **70 lt** in order to guarantee a higher production per hour, with all the automatic process that is the main feature of all Demak equipment.

It is possible to prepare the equipment for high viscosity resin treatment, thanks to heated jacket applied to the tank, to heated pipes and recirculation. The recirculation is very useful to avoid any material sedimentation into the pipes and all over the equipment.

CV2 SMART + VC and **CV DL70 ASI + VC** can be easily equipped with three different vacuum chambers:

- **VC 653040 xyz** : 650 x 300 x 400 mm;
- **VC 653065 xyz** : 650 x 300 x 650 mm;
- **VC 503030 xyz** : 500 x 300 x 300 mm;



PM2 CV 2 SMART
70.50.20 xyz



PM3 CV 2 SMART
140.50.20 xyz

CV SMART
PATENTED TECHNOLOGY

- **BIG FORMAT**
  From 700 x 500 to 1400 x 500 mm working area for optimal atmosphere resin casting.

The **PM2 CV2 SMART 70.50.20 xyz** is characterized by the same **CV SMART** system of the others, but it is engineered for room pressure dosing, in fact it has a ***700 x 500 x 200 mm*** working area and it is equipped with an XYZ ROBOT.


In case you need a bigger working area, we have developed the **PM3 CV2 SMART 140.50.20 xyz**, a machine equipped with a double working area than the PM2 CV2 SMART and, again, ideal for atmosphere resin casting.

ON LINE REMOTE ASSISTANCE is available on all models in order to be followed by our Technical Service at any time.

All the CV SMART series have the **CONTINUOUS VACUUM SYSTEM**, the thin film degassing system, automatic "worn pump gasket" alarm, anti-settling thanks to a continuous materials recirculation and single brushless motorized pump upon each tank.



VACUUM CHAMBER
for automatic lines

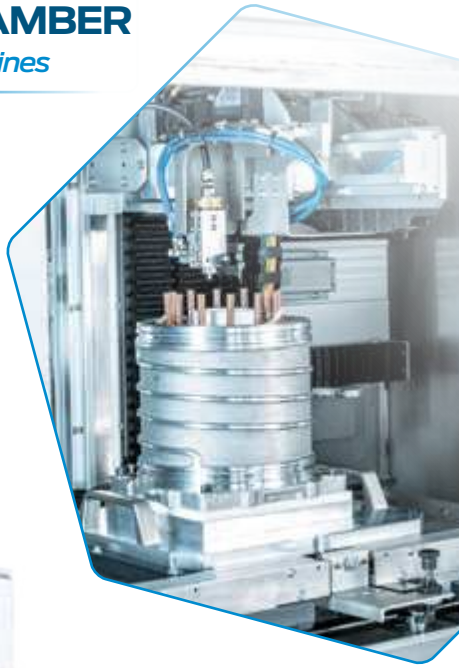



VC
VACUUM CHAMBER

VACUUM CHAMBER
stand alone

DEMAK® provides a wide range of **VACUUM CHAMBERS** with many different sizes. Movement can be performed by a single x-axis up to four axes controlled by servo-motors.

Vacuum dispensing is suggested to avoid any presence of air and moisture inside the final parts.

Possible application on an automatic line with pre-vacuum cabin, casting cabin and post-vacuum cabin.



FULL CONTROL IS NOT A OPTION!

With a **DEMAK's FULL AUTOMATIC LINE** you can obtain very high insulation grade, thanks to strong vacuum treatment of resins and vacuum potting.

DEMAK's FULL AUTOMATIC LINE gives performances, efficiency and repeatability in each step of the process.

FULLY AUTOMATIC LINES





THERMO STIRRER
60 lt

RESIN PRE-TREATMENT SYSTEM

Why it is necessary to pre-treat resin before the loading into the machine?
Because many times it has mineral fillers inside.

The **THERMO-STIRRER** unit has the purpose of heating uniformly the raw materials up to the desired temperature and to continually stir them in order to keep the fillers homogeneous and avoid any possible sedimentation at the bottom of the drums.



THERMO STIRRER
200 lt


PRE-TREATMENT & HEATING UPGRADES



PLASMA
Treatment




PUMPS
Heating

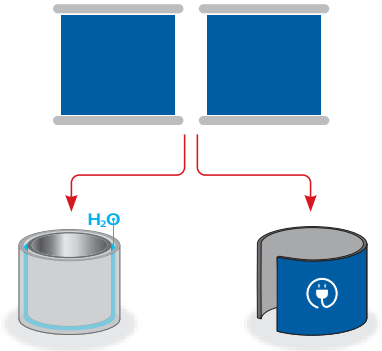

Water Recycling

Electric Blanket


TANKS
Heating

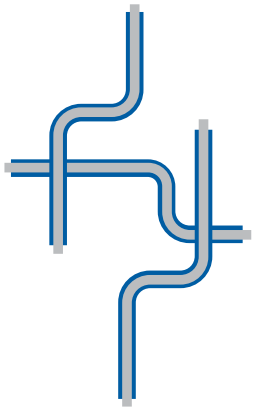

PIPES
Heating

DEMAK® GROUP
Resins & Dispensing Technology

DEMAK GROUP – Global Presence

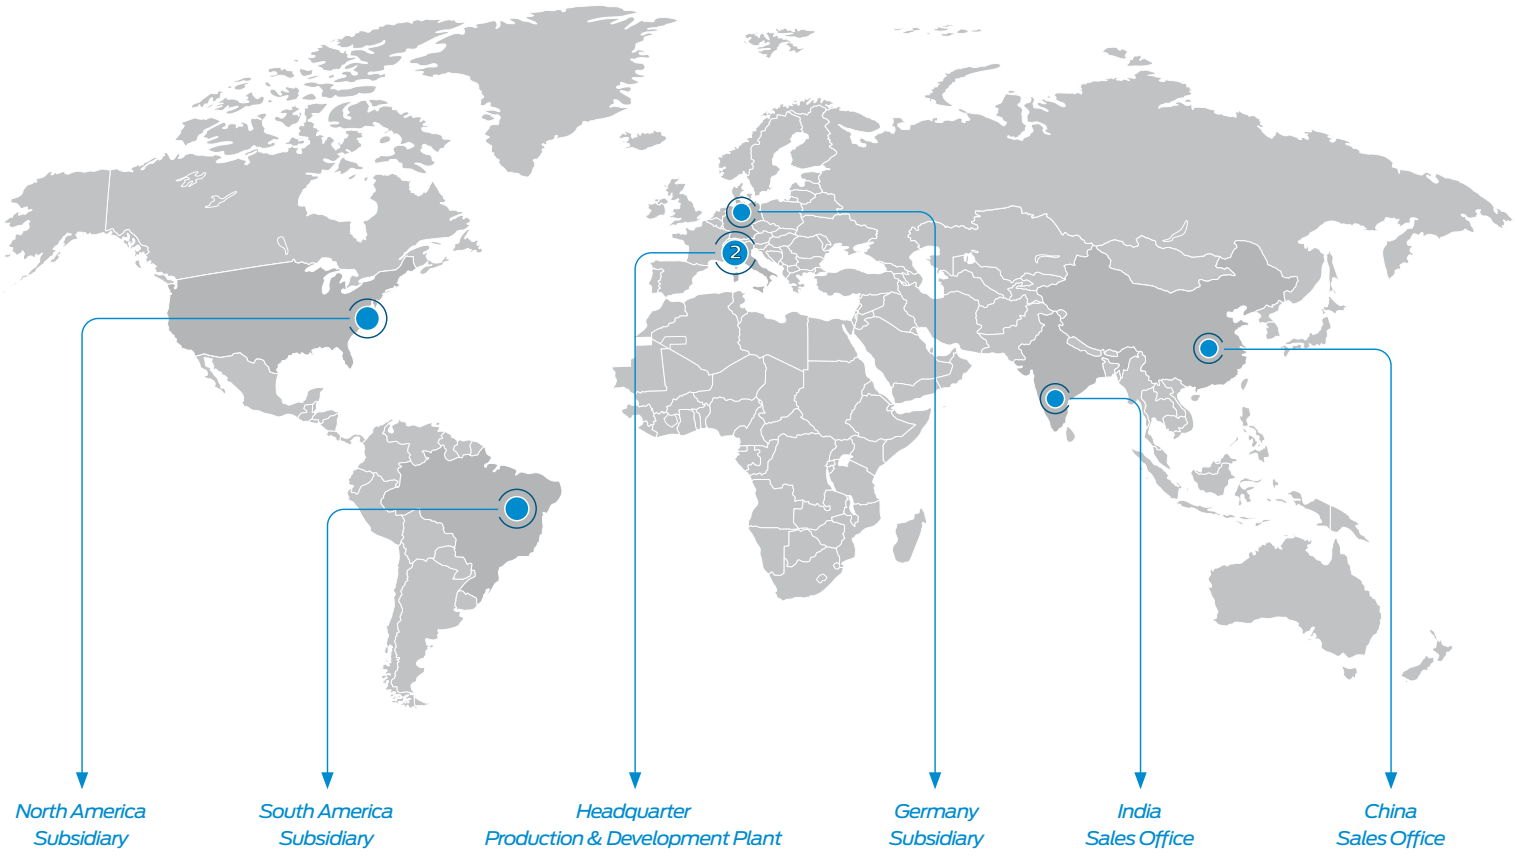

DEMAK S.r.l.

Strada del Cascinotto, 163
10156 Torino (ITALY)
Phone no. (+39) 011 223.98.76
Fax no. (+39) 011 223.98.96
eMail: *sales@demak.it*

DEMAK POLYMERS S.r.l.

Strada del Cascinotto, 163
10156 Torino (ITALY)
Phone no. (+39) 011 223.98.89
Fax no. (+39) 011 223.98.96
eMail: *sales@demak.it*

DEMAK GERMANY GmbH

GREEN BUSINESS PARK CARNAPERHOF
Hermann-Drescher-Weg 4J
45329 Essen (GERMANY)
Phone no. (+49) 201 523.259.90
eMail: *sales@demakgermany.com*

DEMAK AMERICA Inc.

195 North Street – Suite #300
Teterboro – NJ 07608 USA
Phone no. (+1) 973 237.0919 / 0920
Fax no. (+1) 973 237.0926
eMail: *sales@demakamerica.com*

DEMAK South AMERICA Ltda.

Avenida Antonio Gazzola, 1001
Sala 3B, 3° Andar – Jardim Corazza
CEP 13301-916 ITU – SP (Brazil)
Phone no. (+55) 11 4013.0335
eMail: *sales@demaksouthamerica.com*

DEMAK INDIA

SALES OFFICE
eMail: *sales@demak.it*

DEMAK CHINA

SALES OFFICE
eMail: *sales@demak.it*