


## High Performance Bearings

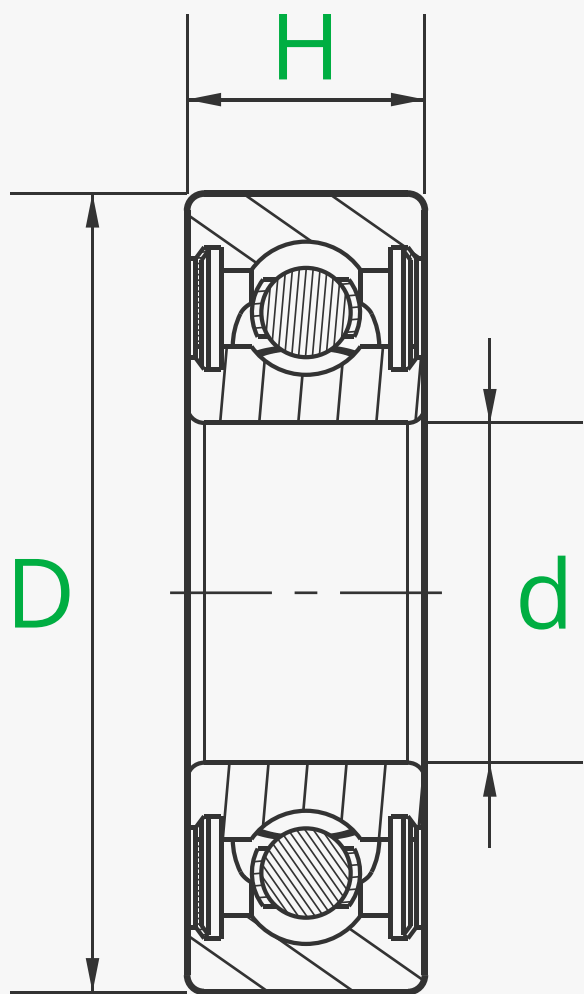

Product ID	Product Type	d (mm) Inside Diameter	D (mm) Outer Diameter	H (mm) Width	Dynamic Load (N)	Static Load (N)	Bearing Clearance (μm)	Max Speed (rpm)	Bearing Seal Type
EA028	608zz P5	8	22	7	3300	1370	10	32000	Metal Shielded
EA029	608 Open Hybrid Ceramic	8	22	7	3300	1370	10	32000	Open
EA022	R188 Open Hybrid Ceramic	6.35(1/4")	12.7(1/2")	4.762(3/16")	1083	438	10	48000	Open


### Basic Information

Ball Bearing Profile	High performance	Bearing Construction	Single row
Sealing Part Structure	Metal shielded/Open	Inner & Outer Ring Material	POM/Bearing steel
Outer Ring Type	Flat	Ball Type	Ceramic/Bearing steel

### Product Feature

- Commonly used high-performance deep groove ball bearings
- Higher precision for stable, durable rotation and higher load capacity

## 高性能轴承

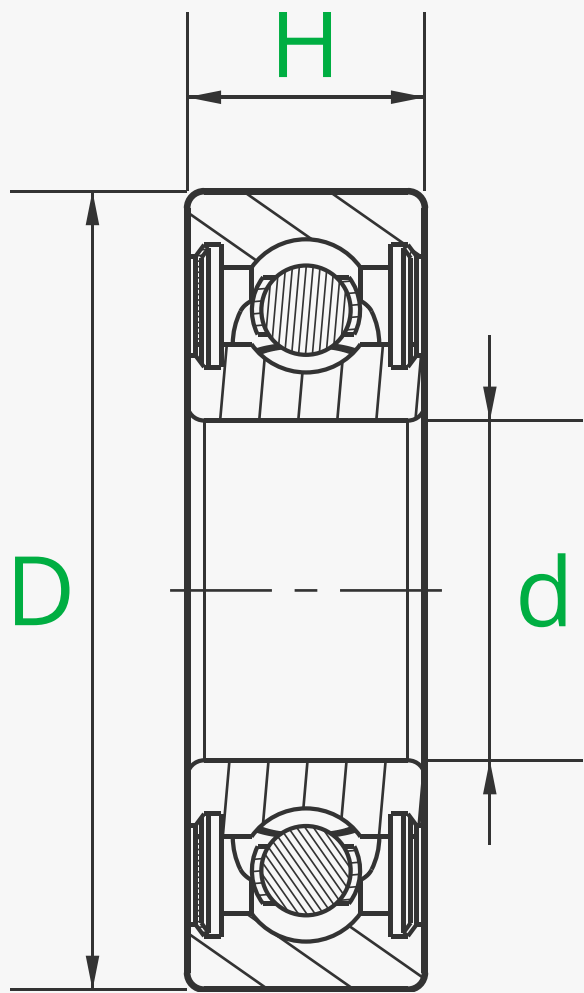

产品 ID	产品型号	内径d (mm)	外径D (mm)	厚度H (mm)	最大动载荷 (N)	最大静载荷 (N)	轴承间隙 (μm)	极限转速 (rpm)	轴承密封类型
EA028	608zz P5	8	22	7	3300	1370	10	32000	铁封
EA029	608开式-陶瓷滚珠	8	22	7	3300	1370	10	32000	开式
EA022	R188开式-陶瓷滚珠	6.35(1/4")	12.7(1/2")	4.762(3/16")	1083	438	10	48000	开式

### 基本信息

轴承类型	高性能	滚动体列数	单列
密封部分构造	铁封/开式	内外圈材质	POM/轴承钢
外轮类型	平面型	滚动体材质	陶瓷/轴承钢

### 产品特点

- 常用的高性能深沟球轴承
- 更高的精度，带来更稳定持久的旋转和更高的许用载荷