
Source crop: A1 Figure 1

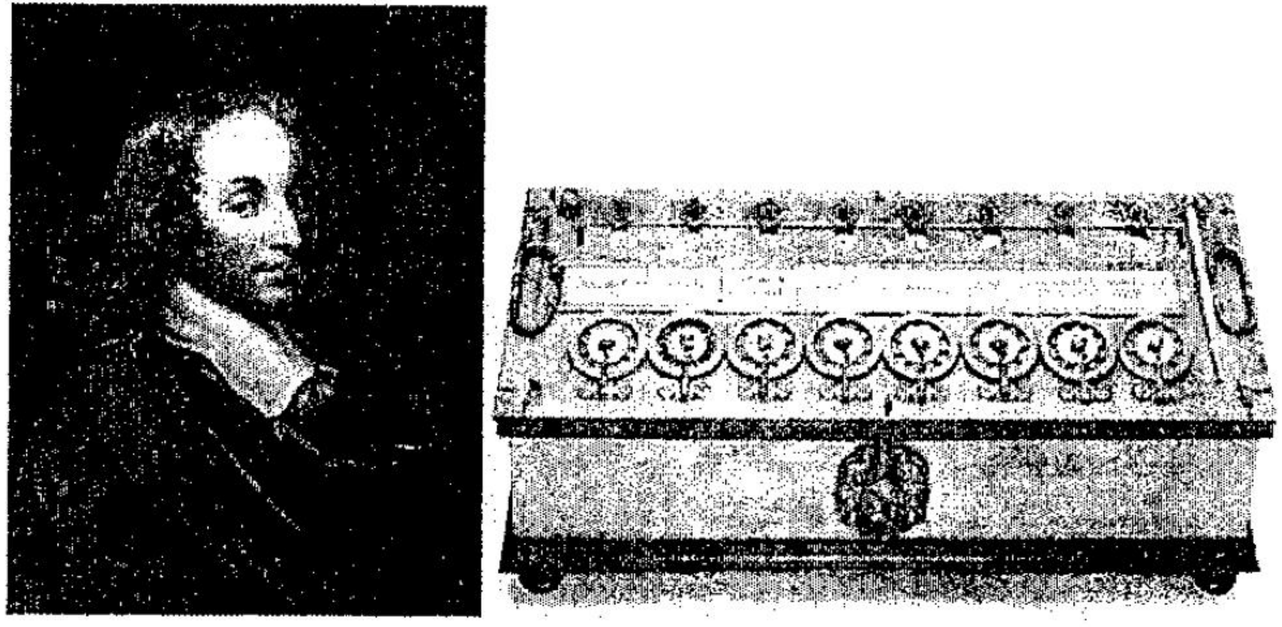

Generated paper: page 2

ccounting.


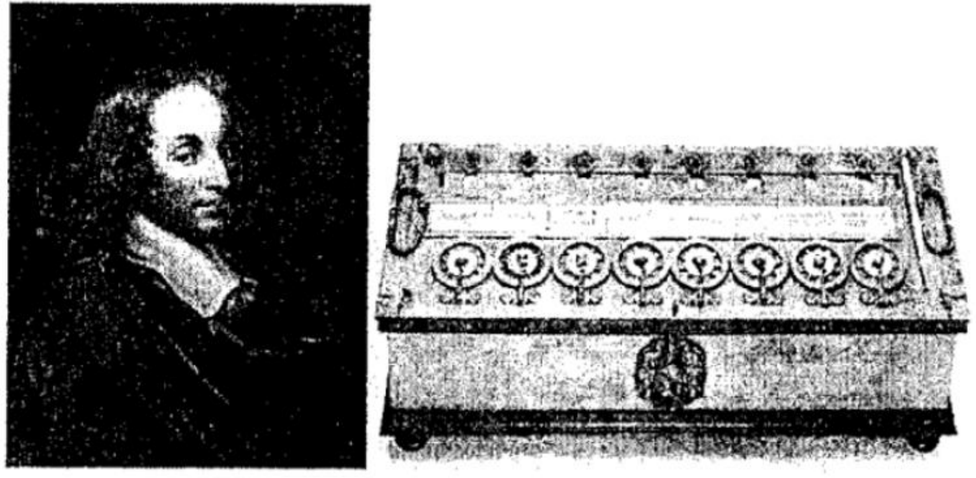


*Figure 1: Inventor 'Y' and his calculating machine.*

Source crop: A2 Figure 1

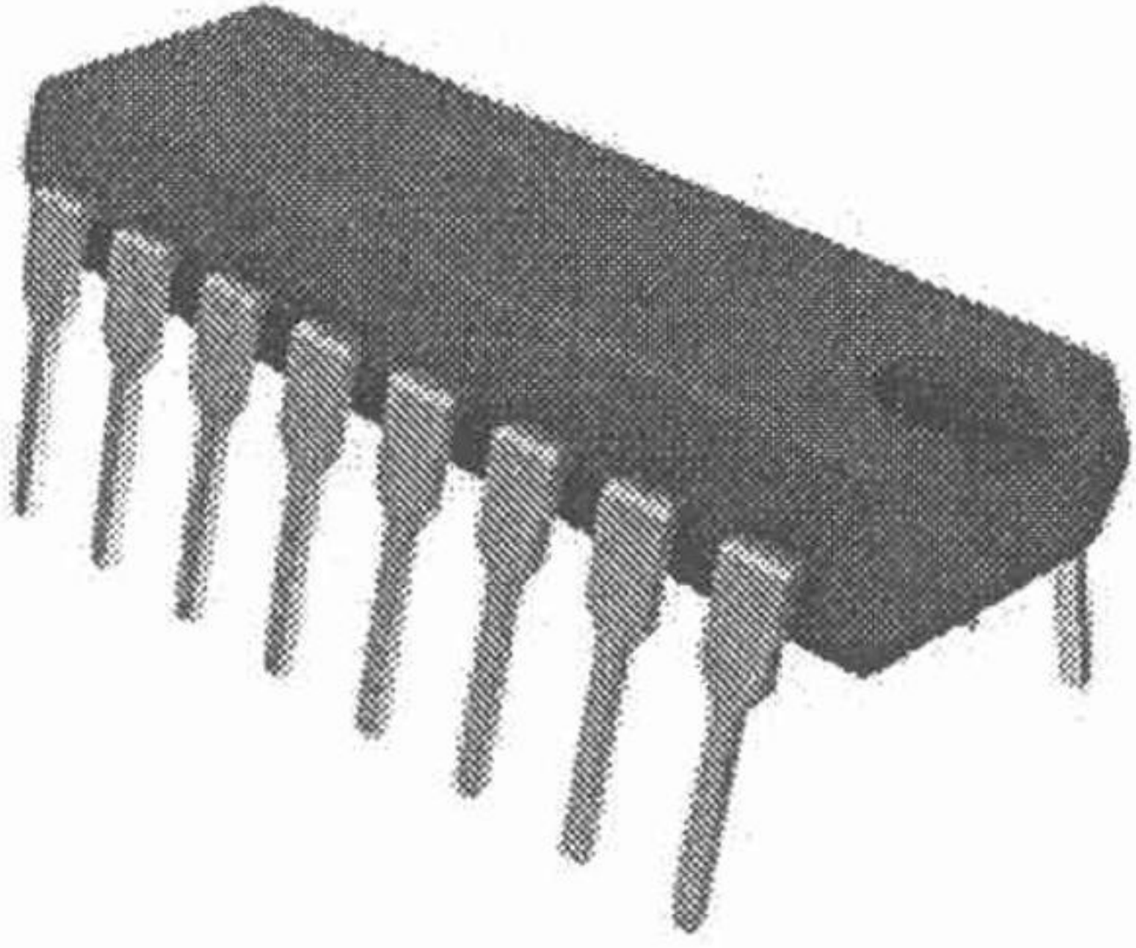

Generated paper: page 3

called as chips.


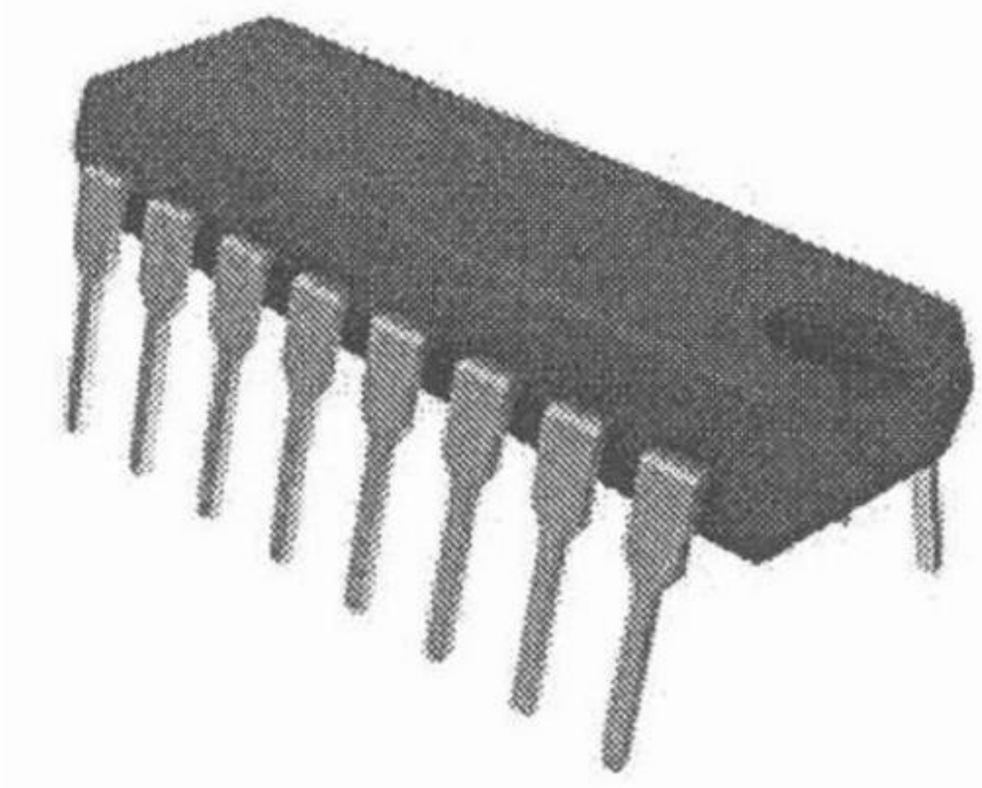


*Figure 1: Component X*

Source crop: A5 Figure 2

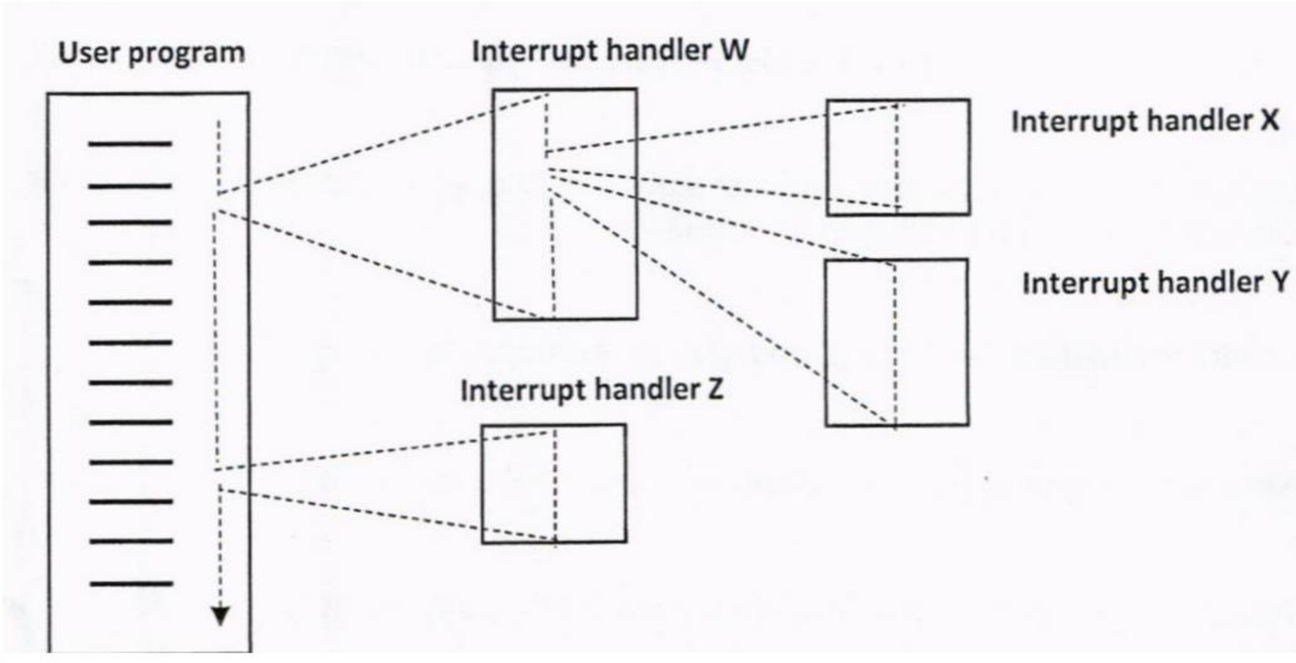


Generated paper: page 4

7 is based on Figure 2.


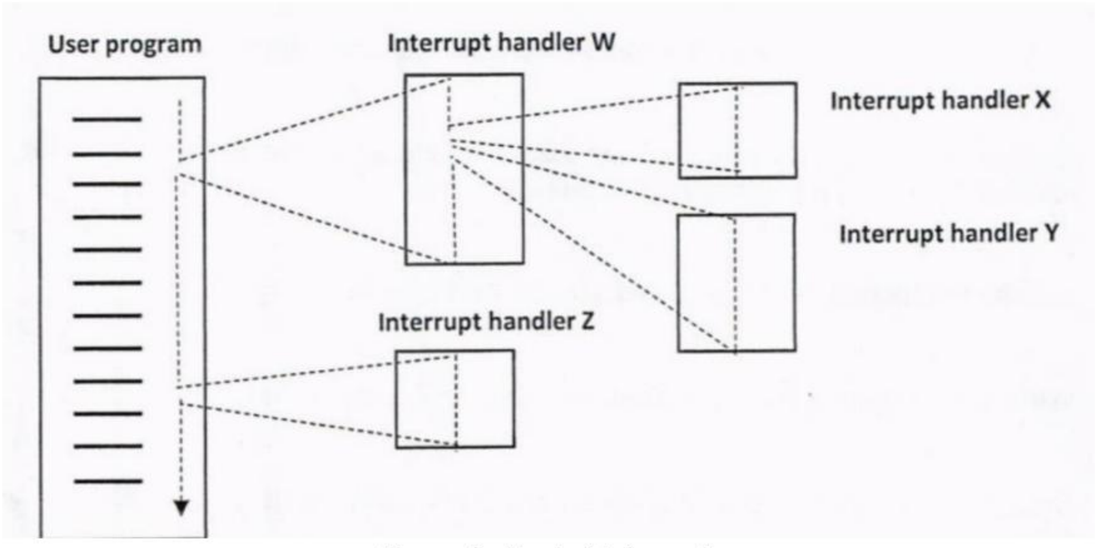



*Figure 2: Nested interrupts*

Source crop: A7 Figure 3

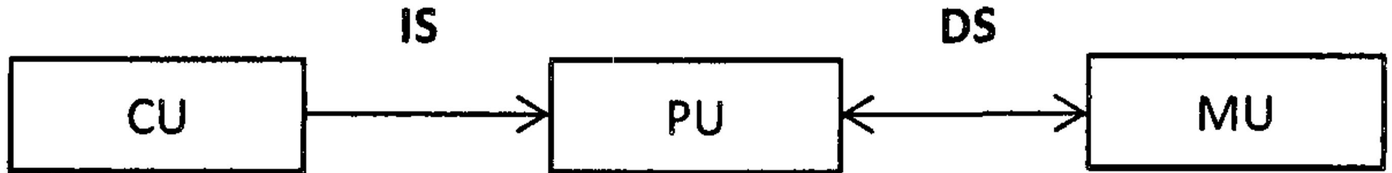


Generated paper: page 5

Memory Unit.

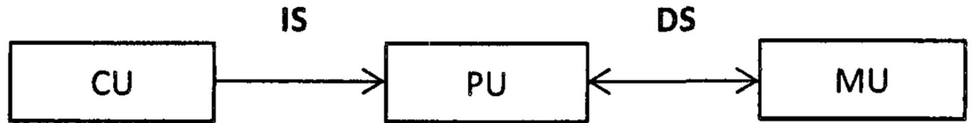
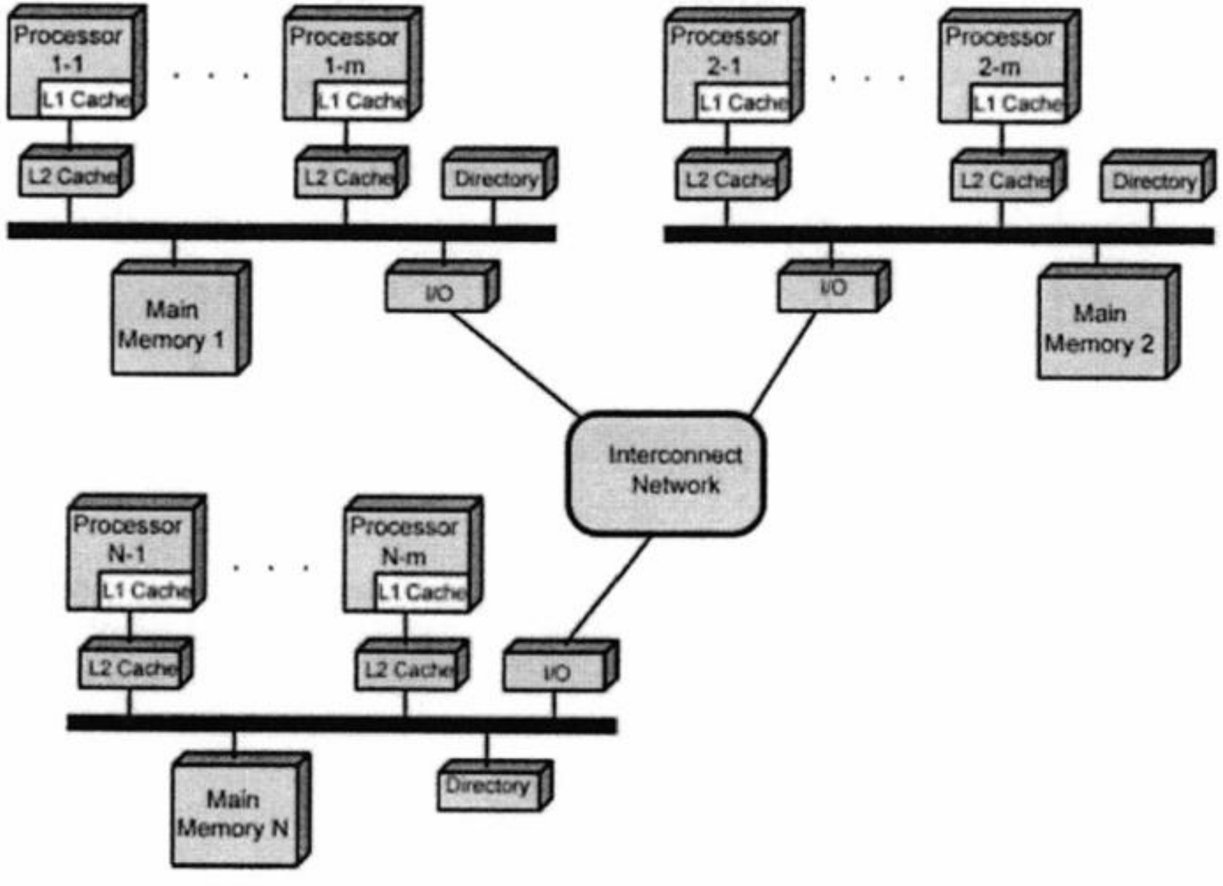



*Figure 3: Single Instruction, Single Data Stream (SISD)*



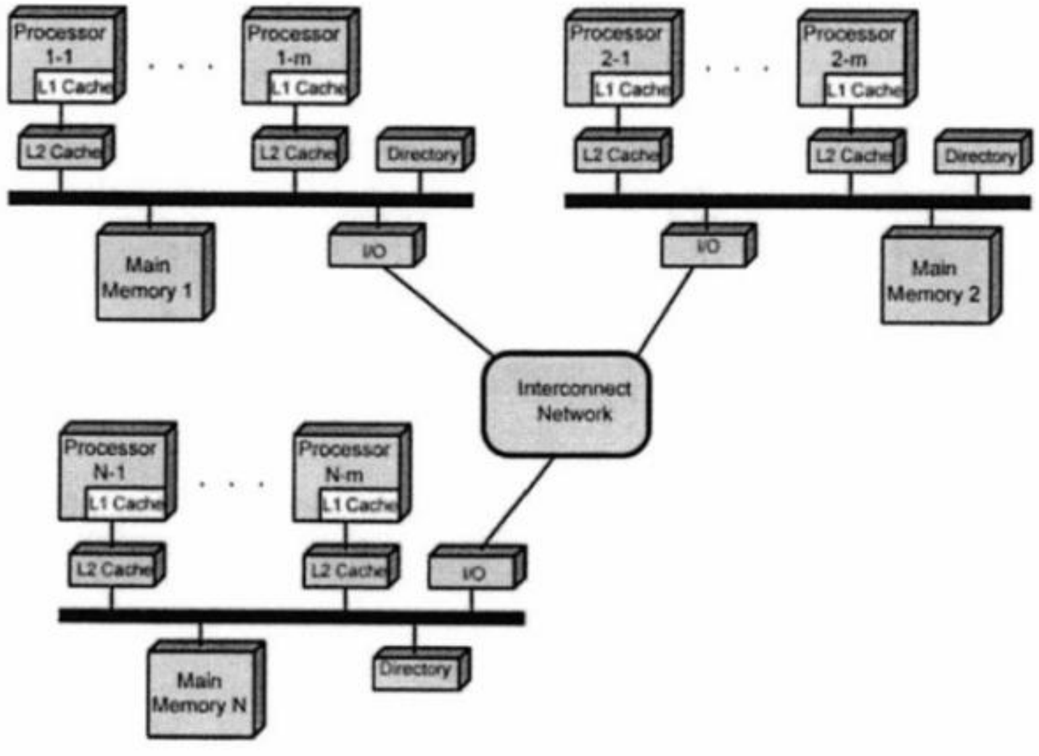




*Figure 2: Non-uniform Memory Access (NUMA)*

on of one of the interfaces to the external device


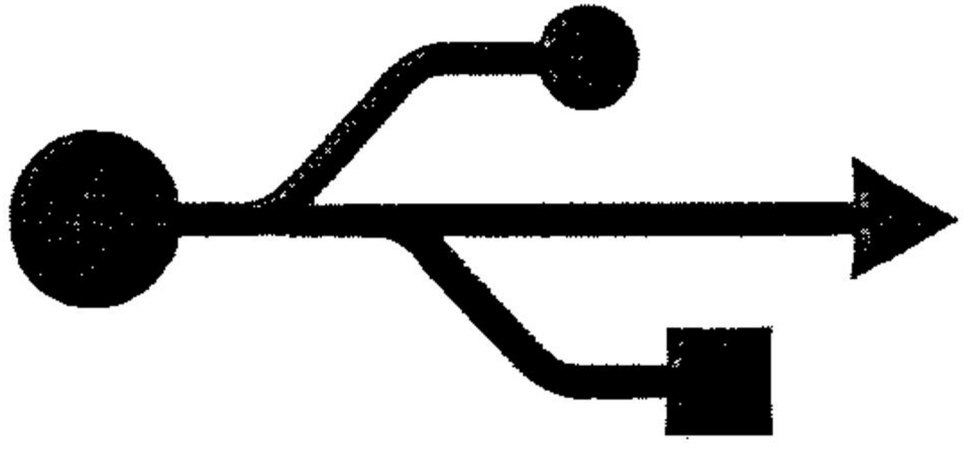


*Figure 1: Interface to the external devices*

Source crop B1 Figure 5

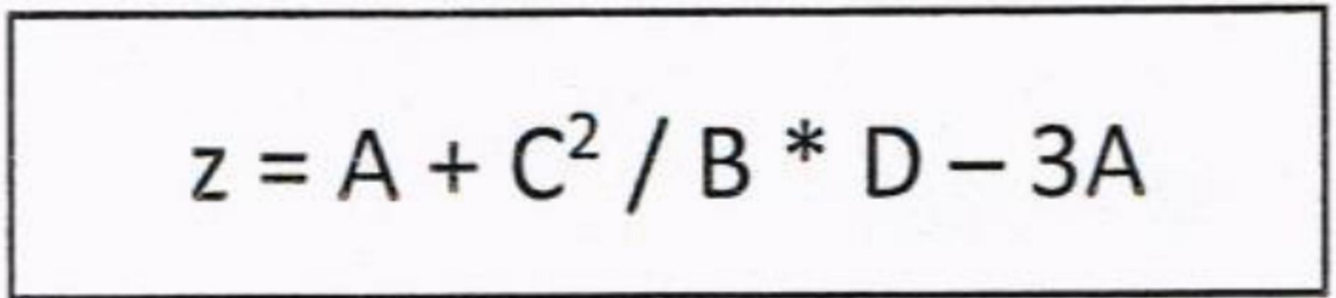


Generated paper: page 8

e final answer must be stored in register z.

z = A + C² / B * D – 3A

*Figure 5*

Table 1: Machine instruction

| Zero-address | One-address | Three-address |
|---|---|---|
| PUSH p | LOAD p | ADD (p,q,r) |
| POP p | STOR p | SUB (p,q,r) |
| ADD | ADD p | MUL (p,q,r) |
| SUB | SUB p | DIV (p,q,r) |
| MUL | MUL p | |
| DIV | DIV p | |



*Figure 5*

*Table 1: Machine instruction*

| Zero-address | One-address | Three-address |
|---|---|---|
| PUSH p | LOAD p | ADD (p,q,r) |
| POP p | STOR p | SUB (p,q,r) |
| ADD | ADD p | MUL (p,q,r) |
| SUB | SUB p | DIV (p,q,r) |
| MUL | MUL p | |
| DIV | DIV p | |