


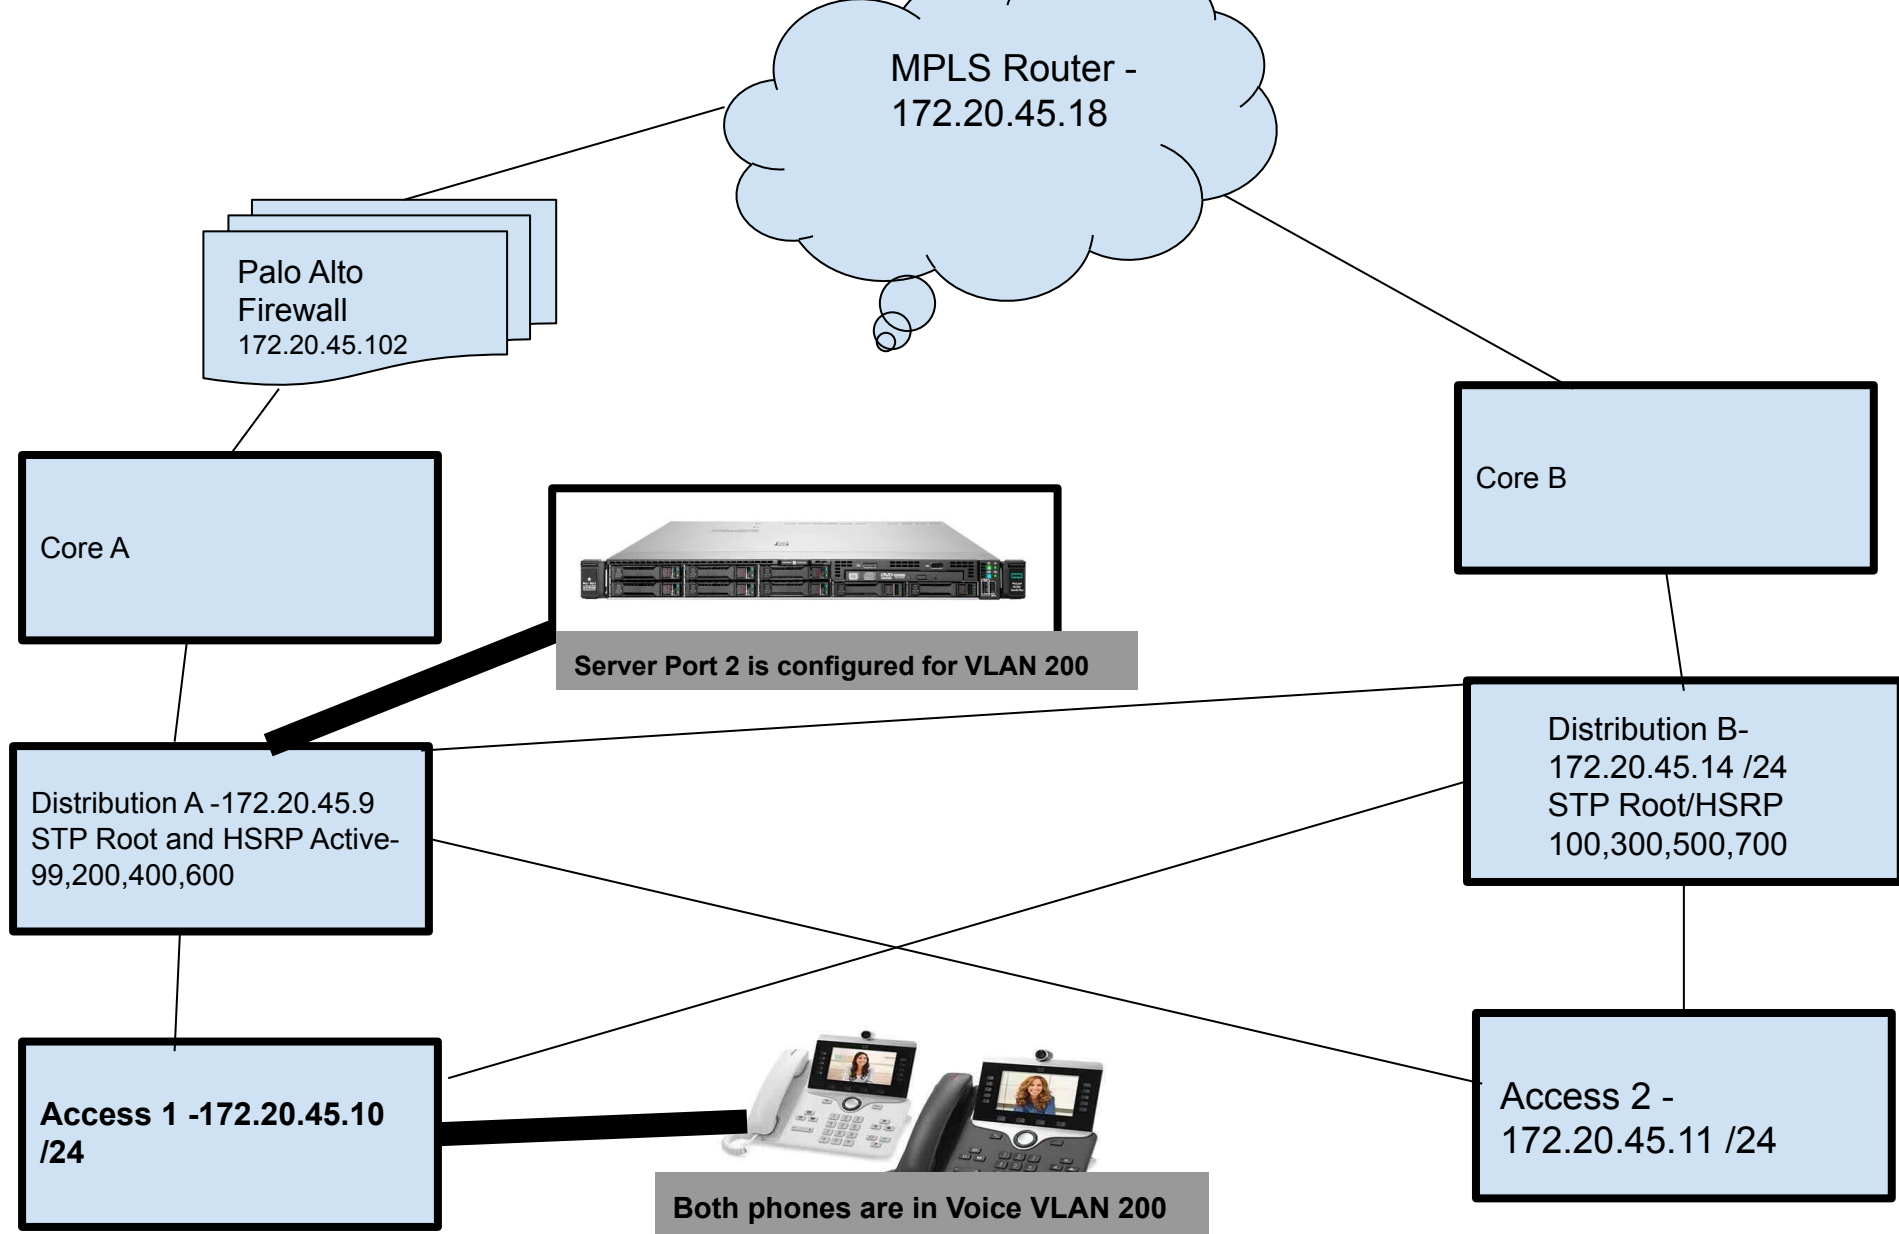

Core A, Palo Alto FW, MPLS Router and Core B are all participating in eBGP with BFD enable on all links for link detection. PA Eth 1/1 is setup for the LAN zone and 1/2 for WAN. Static Nat is enable for the switch with 10.147.64.30 on Palo Alto, with security policy in place to allow. There's also a NAT policy for VLAN 200 voice.